
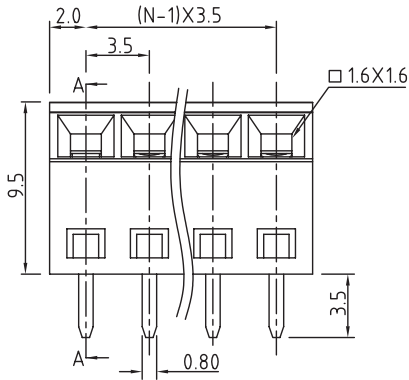



SECTION A-A

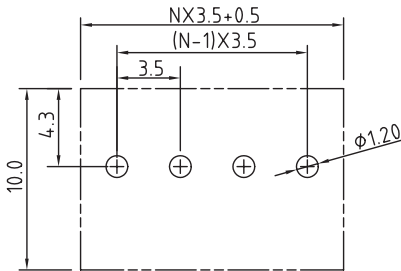

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW SLOT TYPE: "-"
CONTACT: BRASS
SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 10A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 1.6KV
CONTACT RESISTANCE: 20 mOhm max

STANDARD
ULus CERTIFIED E315414 / MODEL NUMBER 2211


MECHANICAL
SOLID WIRE: 28-16AWG / 0.08-1.3MM²
STRANDED WIRE: 28-16AWG / 0.08-1.3MM²
TORQUE: □ □ 1.7Lb-In / 0.20Nm

WIRE STRIPE LENGTH: 5-6MM
SCREW: M2.0
PITCH: 3.5MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 2211

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		
G							
F							
E							
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: SERIE 2211 - 3.5MM 55° ENTRY MODULAR WITH RISING CAGE CLAMP - 1.3MM² WIRES WR-TBL	SIZE A4
B	31-MAR-10	55° ENTRY	JP				
A	12-OCT-09	PDF	JP				
REV	DATE	FILE	BY				
					DRAW: MARVIN	WERI PART NO: 691 221 120 0xx	