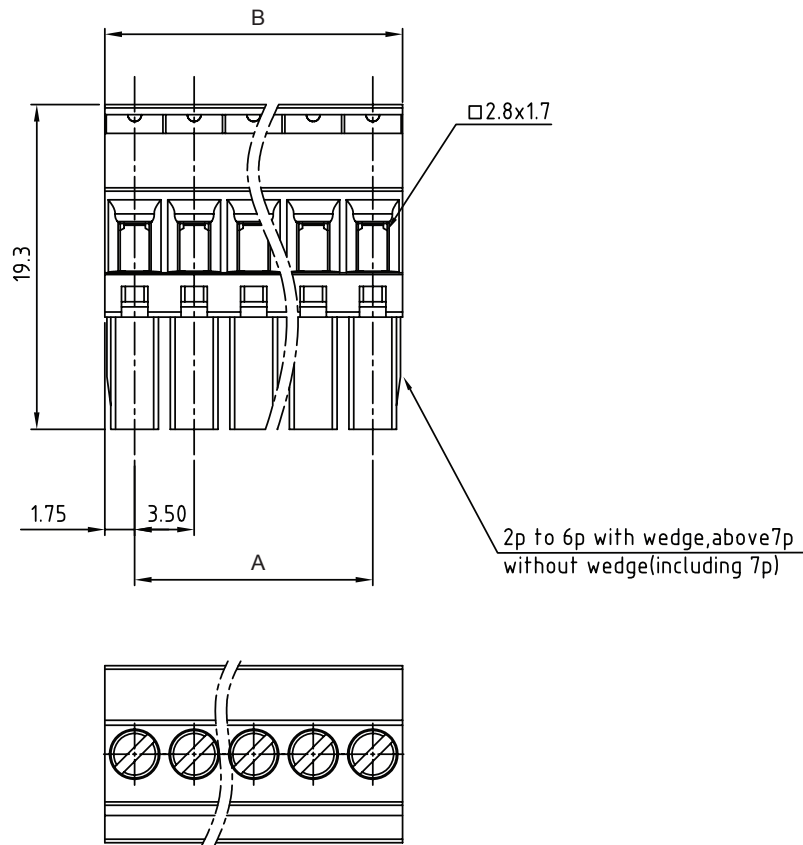
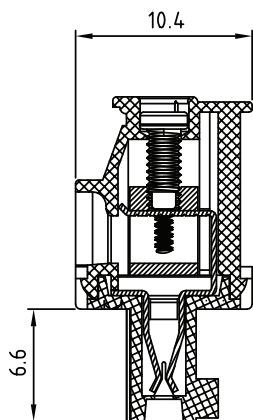


#### TECHNICAL CHARACTERISTICS

MATERIAL  
INSULATOR: PA 66  
FLAMMABILITY RATING: UL94-V0  
COLOR: GREEN  
METAL HOUSING: BRASS (CuZn)  
TERMINAL SCREW: STEEL ZINC PLATING  
TERMINAL SCREW SLOT TYPE: "-"  
WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL  
OPERATING TEMPERATURE: -40°C UP TO 105°C  
COMPLIANCE: LEAD FREE AND RoHS

|                       |           |         |
|-----------------------|-----------|---------|
| ELECTRICAL            | cULus     | VDE     |
| CURRENT RATING:       | 8 A       | 10 A    |
| WORKING VOLTAGE:      | 300 VAC   | 300 VAC |
| WITHSTANDING VOLTAGE: | 1.6 KV    | 2.5 KV  |
| CONTACT RESISTANCE:   | 20 mΩ MAX |         |

STANDARD  
ULus CERTIFIED E315414  
CE CERTIFIED 40023402

|                |                            |
|----------------|----------------------------|
| MECHANICAL     |                            |
| SOLID WIRE:    | 28-16 AWG / 0.081-1.31 MM² |
| STRANDED WIRE: | 28-16 AWG / 0.081-1.31 MM² |
| TORQUE:        | 1.7 Lb-In / 0.2 Nm         |


WIRE STRIPE LENGTH: 6-7 MM  
SCREW: M2.0  
PITCH: 3.5 MM

PACKAGING  
BOX

DIMENSION  
A = (NB. PINS - 1) x PITCH  
B = NB. PINS x PITCH

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X =  $\pm 0.2$

.XX =  $\pm 0.15$



APPROVAL: FBr

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: AS

DESCRIPTION: WR-TBL - SERIE 3661 - 3.50MM HORIZONTAL CABLE ENTRY  
PLUG WITH HOOK ON BACK SIDE

WERI PART NO: 691 366 110 0xx

SIZE

**A4**

