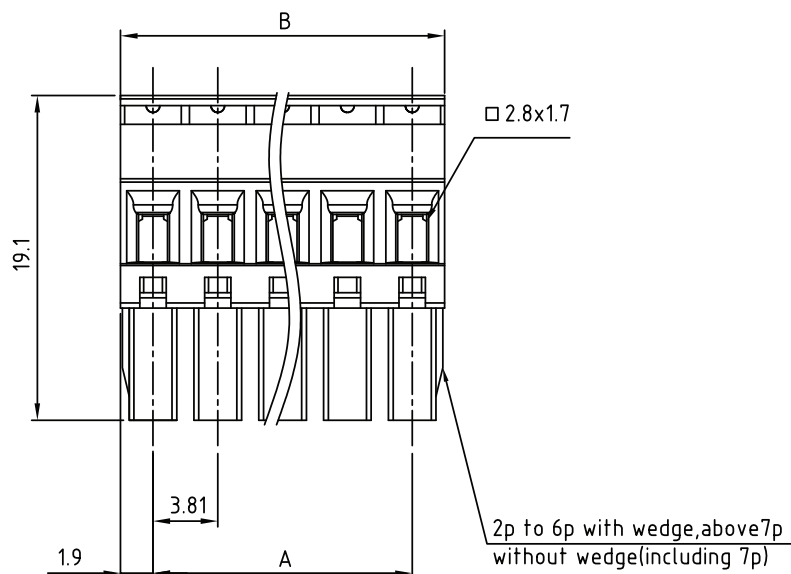
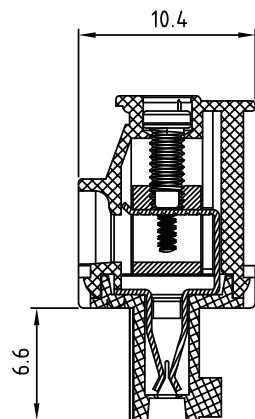


TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING
TERMINAL SCREW SLOT TYPE: "-"
WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	8 A	10 A
WORKING VOLTAGE:	300 VAC	300 VAC
WITHSTANDING VOLTAGE:	1.6 KV	2.5 KV
CONTACT RESISTANCE:	20 mOhm max	

STANDARD
ULus CERTIFIED E315414
CE CERTIFIED 40023402

MECHANICAL
SOLID WIRE: 28-16 AWG / 0.081-1.31 MM²
STRANDED WIRE: 28-16 AWG / 0.081-1.31 MM²
TORQUE: 1.7 Lb-In / 0.2 Nm

WIRE STRIPE LENGTH: 6-7 MM
SCREW: M2.0
PITCH: 3.81 MM

PACKAGING
BOX

DIMENSION
A = (NB. PINS - 1) x PITCH
B = NB. PINS x PITCH

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



WÜRTH ELEKTRONIK

APPROVAL: FBr

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: MARVIN

DESCRIPTION: SERIE 3663 - 3.81MM HORIZONTAL CABLE ENTRY PLUG
WITH HOOK ON BACK SIDE - WR-TBL

WERI PART NO: 691 366 310 0xx

SIZE

A4

