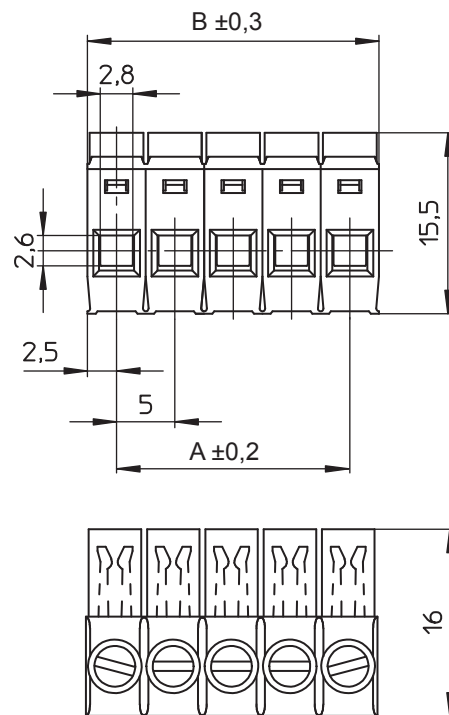


A = (nb. pin-1) x pitch

B = (nb. pin x pitch)

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PC
FLAMMABILITY RATING: UL94V0
COLOR: GREY
METAL HOUSING: STEEL / Zn
TERMINAL SCREW: STEEL / Zn
WIRE GUARD: PHOSPHOR BRONZE / Ni+Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	14A	16A
WORKING VOLTAGE:	300VAC	250VAC
WITHSTANDING VOLTAGE:	1,6KV	2,5KV
CONTACT RESISTANCE:	20 mΩ MAX	

STANDARD
 CERTIFIED: E150931 CAT. N°: CUF (2)
 CERTIFIED: 40026528 TYPE: CUF

MECHANICAL
 SOLID WIRE: 24-12 AWG / 0,2-3,31 mm²
 STRANDED WIRE: 24-12 AWG / 0,2-3,31 mm²
 TORQUE: 4Lb.In / 0,5 Nm

WIRE STRIPE LENGTH: 7 mm
 SCREW: M2,5
 PITCH: 5 mm

PACKAGING
 BOX

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A	22-AUG-14	PDF	AK
REV	DATE	FILE	BY

PROJECTION:



APPROVAL: QL

GENERAL TOLERANCE

±0,1



UNIT: MM

SCALE:

SHEET: 1/2

DRAW: AK

DESCRIPTION: SERIE 3857 - 5.00 MM - PLUG (VERTICAL) -
 GLOW WIRE PLASTIC - WR-TBL

WERI PART NO: 691 385 700 0xx

SIZE

A4

