


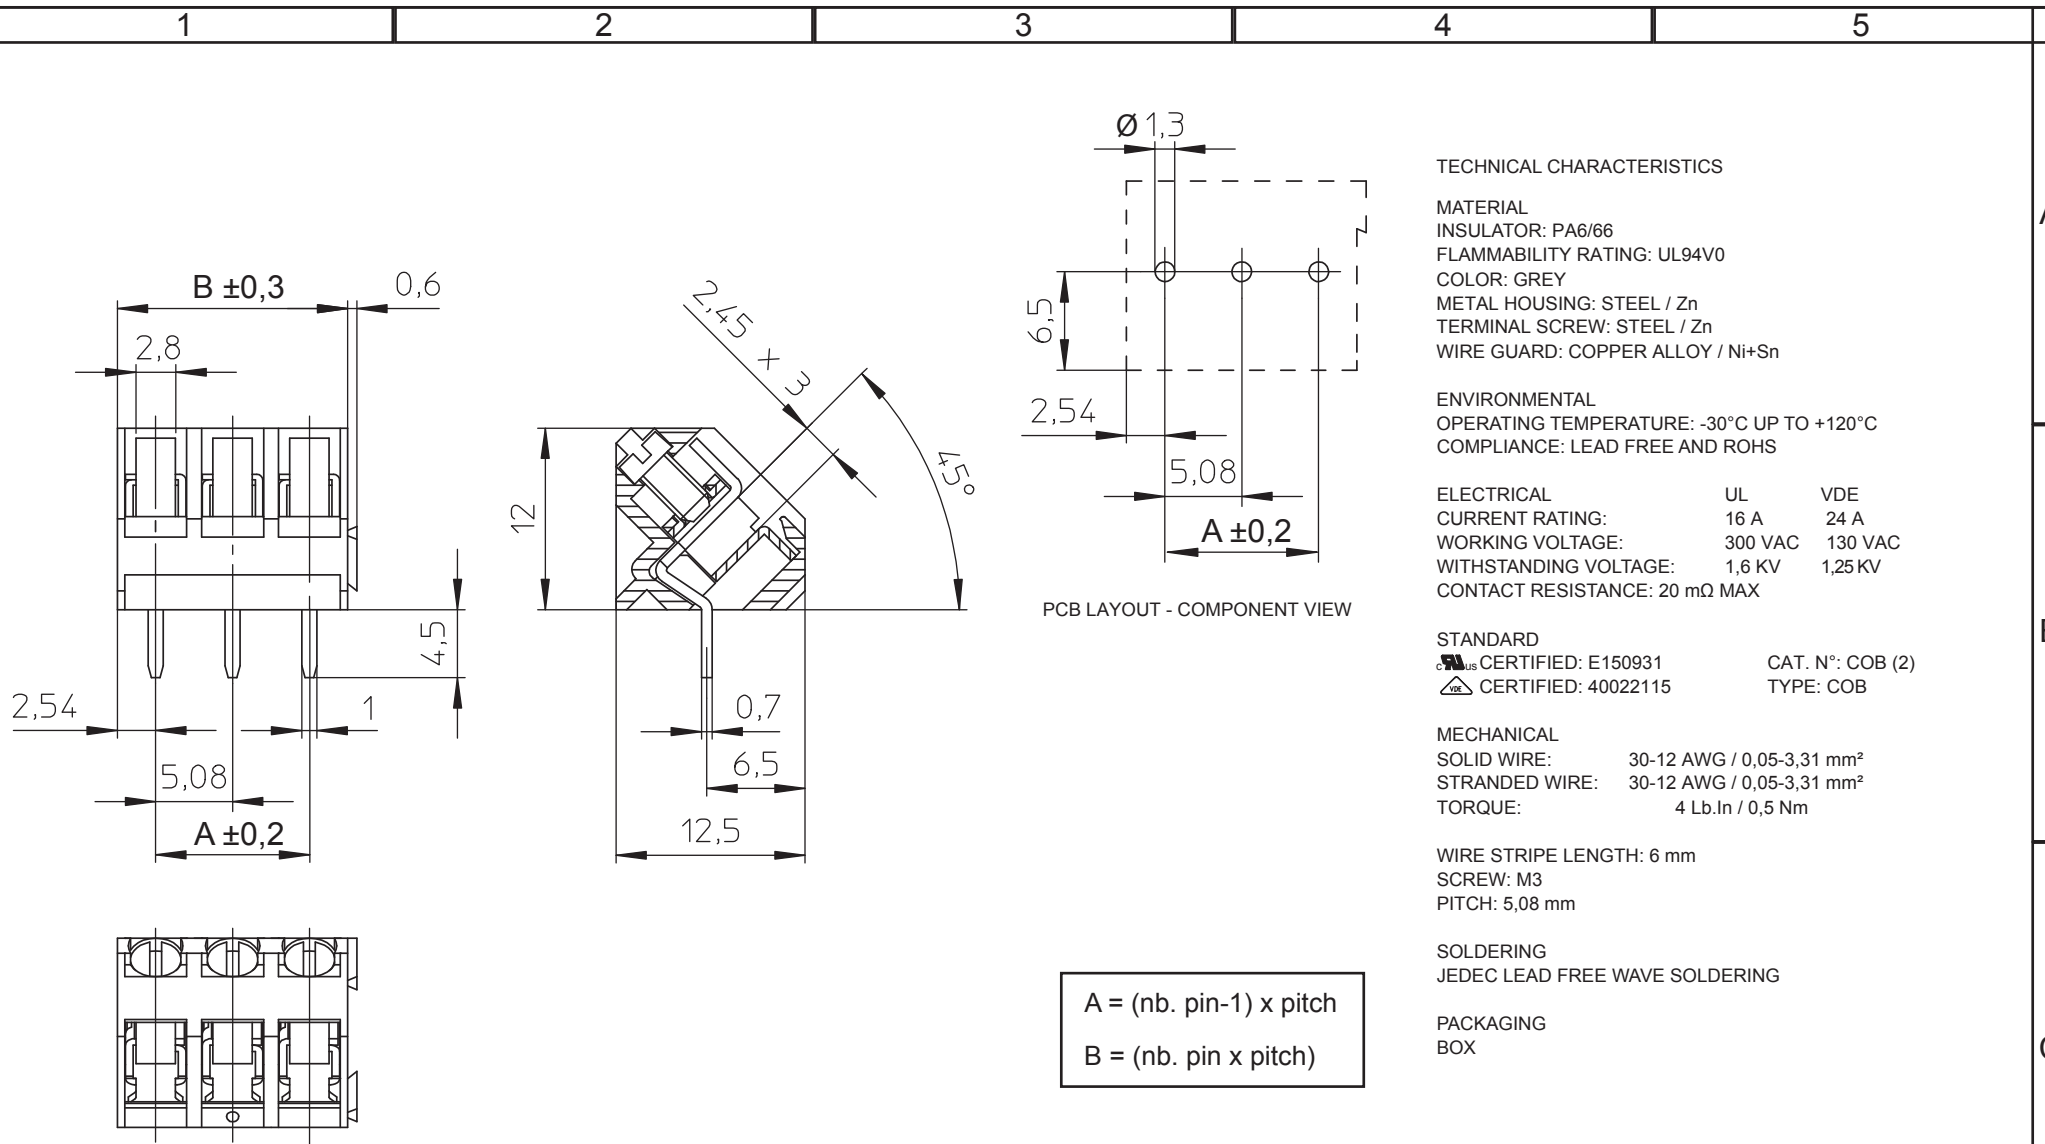

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA6/66
FLAMMABILITY RATING: UL94V0
COLOR: GREY
METAL HOUSING: STEEL / Zn
TERMINAL SCREW: STEEL / Zn
WIRE GUARD: COPPER ALLOY / Ni+Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	16 A	24 A
WORKING VOLTAGE:	300 VAC	130 VAC
WITHSTANDING VOLTAGE:	1,6 KV	1,25 KV
CONTACT RESISTANCE:	20 mΩ MAX	

STANDARD
UL CERTIFIED: E150931 CAT. N°: COB (2)
CE CERTIFIED: 40022115 TYPE: COB

MECHANICAL
SOLID WIRE: 30-12 AWG / 0,05-3,31 mm²
STRANDED WIRE: 30-12 AWG / 0,05-3,31 mm²
TORQUE: 4 Lb.In / 0,5 Nm

WIRE STRIPE LENGTH: 6 mm
SCREW: M3
PITCH: 5,08 mm

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
BOX

A = (nb. pin-1) x pitch
B = (nb. pin x pitch)

RoHS Compliant								
G				PROJECTION: 	GENERAL TOLERANCE ±0,1	 WÜRTH ELEKTRONIK		
F								
E								
D								
C				APPROVAL: FBr	UNIT: MM	DESCRIPTION: SERIE 2015 - 5.08 MM - 45° CABLE ENTRY WITH RISING CAGE CLAMP - WR-TBL	SIZE	
B					SCALE:			
A	19-AUG-14	PDF	AK			SHEET: 1/2	WERI PART NO: 691 201 520 0xx	A4
REV	DATE	FILE	BY			DRAW: AK		

