

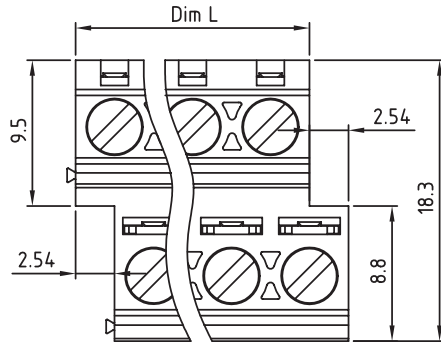
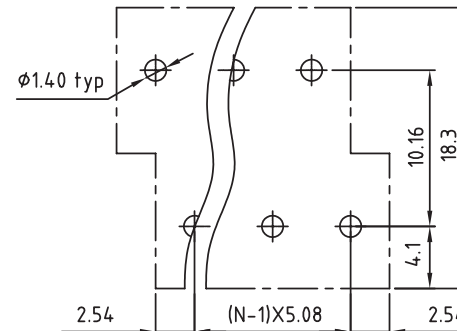


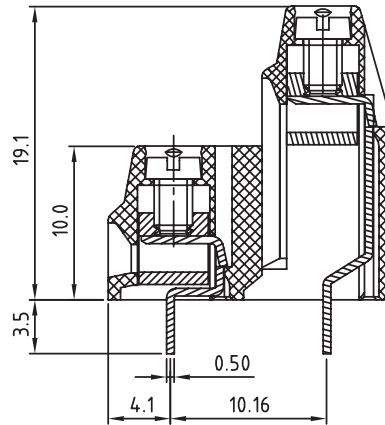

Poles	2x2	2x3	2x4	2x5	2x6	2x7	2x8	2x9	2x10	2x11	2x12	2x13
Dim L	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.15					±0.20					±0.25	
Poles	2x14	2x15	2x16	2x17	2x18	2x19	2x20	2x21	2x22	2x23	2x24	
Dim L	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.25					±0.30						

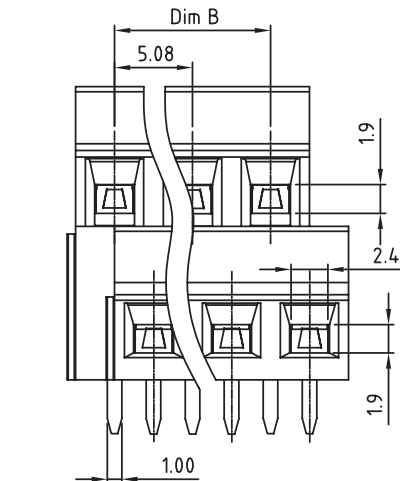

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66

FLAMABILITY RATING: UL94-V0

COLOR: GREEN

METAL HOUSING: BRASS (CuZn)

TERMINAL SCREW: STEEL ZINC PLATING "-" SLOT TYPE

WIRE GUARD: STAINLESS STEEL

SURFACE OF SOLDER TAIL PLATING: TIN

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING:

UL

10A

WORKING VOLTAGE:

300VAC

WITHSTANDING VOLTAGE:

1.6KV

CONTACT RESISTANCE:

20 mOhm MAX

STANDARD

 CERTIFIED E315414 / MODEL NUMBER 2315

MECHANICAL

SOLID WIRE:

26-16 AWG / 0.13-1.3MM²

STRANDED WIRE:

26-16 AWG / 0.13-1.3MM²

TORQUE:

3.5Lb.In / 0.4Nm

WIRE STRIPE LENGTH: 6-7mm

SCREW: M3

PITCH: 5.08mm


SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 2315

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = $\pm$ 0.2

.XX = $\pm$ 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: SERIE 2315 - 5.08MM DOUBLE LEVEL HORIZONTAL ENTRY
MODULAR WITH RISING CAGE - 1.3MM² WIRES WR-TBL

WERI PART NO: 691 231 510 0xx

SIZE

A4