

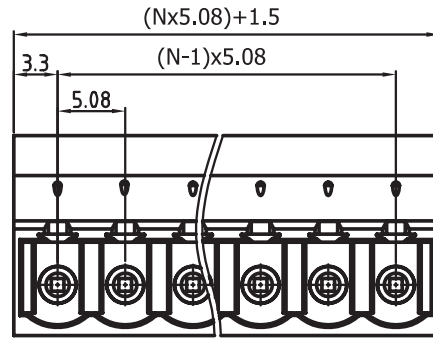


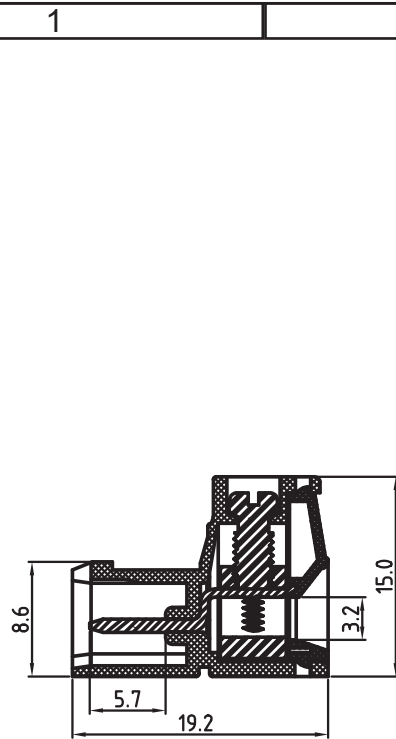

N=Number of contacts

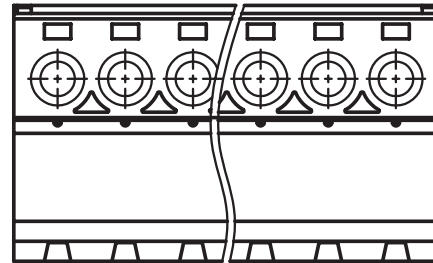

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING
TERMINAL SCREW SLOT TYPE: "-"
WIRE GUARD: PbZn TIN PLATED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 20A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 1.6KV
CONTACT RESISTANCE: 20 mOhm max

STANDARD
ULus CERTIFIED E315414 / MODEL NUMBER 3485

MECHANICAL
SOLID WIRE: 22-12 AWG / 0.326-3.31 MM²
STRANDED WIRE: 22-12 AWG / 0.326-3.31 MM²
TORQUE: 5.0 Lb-In / 0.56 Nm

WIRE STRIPE LENGTH: 7-8 MM
SCREW: M3.0
PITCH: 5.08 MM

PACKAGING
BOX

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15			SIZE A4
G								
F								
E								
D								
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: SERIE 3485 - 5.08MM REVERSED GENDER VERTICAL CABLE ENTRY PLUG - WR-TBL		
B	13-OCT-09	STANDARD	JP		SCALE:			
A	04-NOV-08	PDF	JP		SHEET: 1/2		WERI PART NO: 691 348 500 0xx	
REV	DATE	FILE	BY		DRAW: MARVIN			

