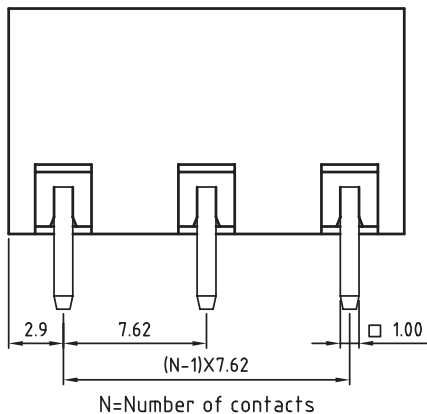
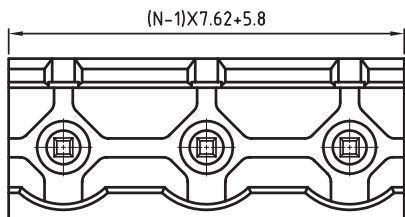


PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 CONTACT: BRASS
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 20A
 WORKING VOLTAGE: 300VAC
 WITHSTANDING VOLTAGE: 1.6KV
 CONTACT RESISTANCE: 20 mOhm max

STANDARD
 cULus CERTIFIED E315414

MECHANICAL
 PITCH: 7.62MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

RoHS Compliant								
G				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15			
F								
E								
D								
C	25-FEV-22	PBT -> PA66	AK	APPROVAL: JHe	UNIT: MM	DESCRIPTION: SERIE 3114 - 7.62MM OPEN VERTICAL PCB HEADER WR-TBL		SIZE A4
B	14-OCT-09	STANDARD	JP		SCALE:			
A	12-NOV-08	PDF	JP		SHEET: 1/1	WERI PART NO: 691 311 400 0xx		
REV	DATE	FILE	BY		DRAW: MARVIN			