
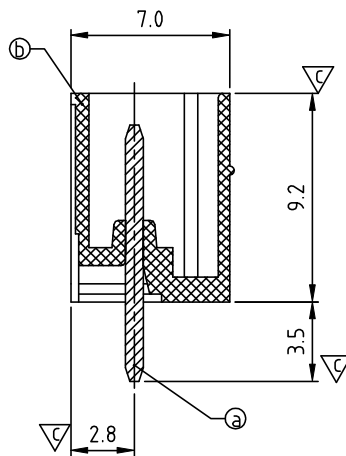
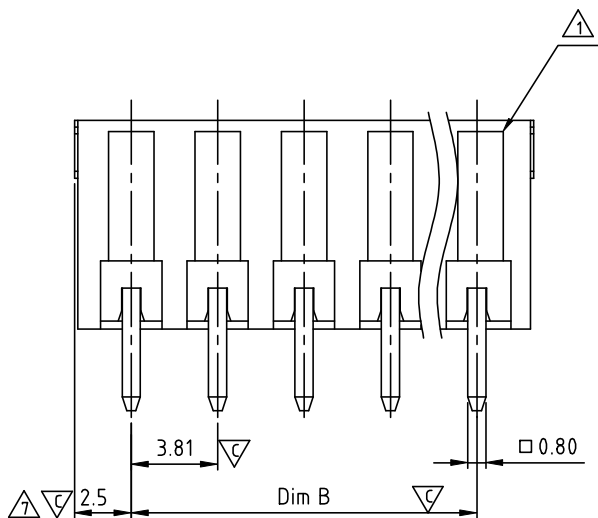


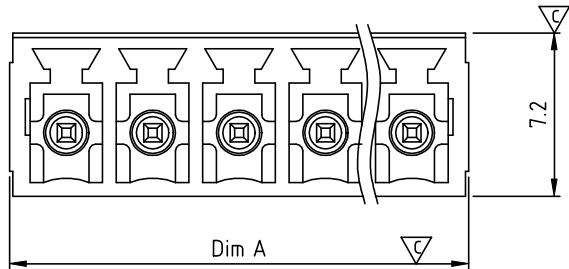


DIMENSION

A	(N-1)×3.81+5.0
B	(N-1)×3.81

N= number of poles

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

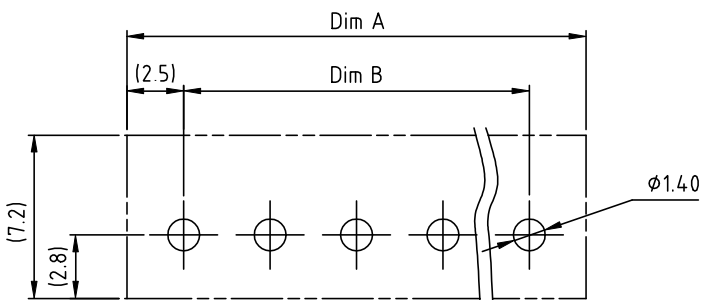

RECOMMENDED PCB LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	04/20'06	Added feature	Marvin
△	8/16'06	Added VDE standard	Steady
△	1/12'07	Soldering temperature changed from 245° to 250°	Tony
△	5/27'08	Operating temperature is changed	Marvin
△	2009.08.18	The material is changed	Jacke
△	2010.07.07	Remove the CSA mark	Chen Bo
△	2010.12.21	Dim changed from 2.6 to 2.5	Runner
△	2012.05.22	Voltage rating is changed	Chen Bo
△	2012.06.04	The color is added	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALL Y!!!			

Material:

- △5 ● Item ① Male contact pin: Copper Tin plated
- Item ② Terminalhousing: Thermoplastic (UL94 V-0)

- Electrical: cULus /VDE
- △8 ● Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- △4 ● Operating temperature: -40°C to +115°C
- △3 ● Soldering temperature: 250°C±10°C/5 Sec
- △6 ● Safety Approval: cULus VDE
- Critical dimension: ∇

OQ xx 3 2 x 0 xxxx G

No. OF POLES
02: 2 POLES

24: 24 POLES

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- △9 C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo
000A: "ANYTEK" Logo
Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 3.81mm Series 180° (2P-24P) Triangle Key Lock						
PART NO.		OQxx32x0xxxxG			DWG NO.	80Q0601		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Chen Bo 06/04`12	Chen Bo 05/14`12			UNIT: mm	X. ±0.50	
						SCALE: NONE	X.X ±0.30	
						REV.: N	X.XX ±0.10	
						SHEET: 01/01		X° ±1°