



RoHS Compliant

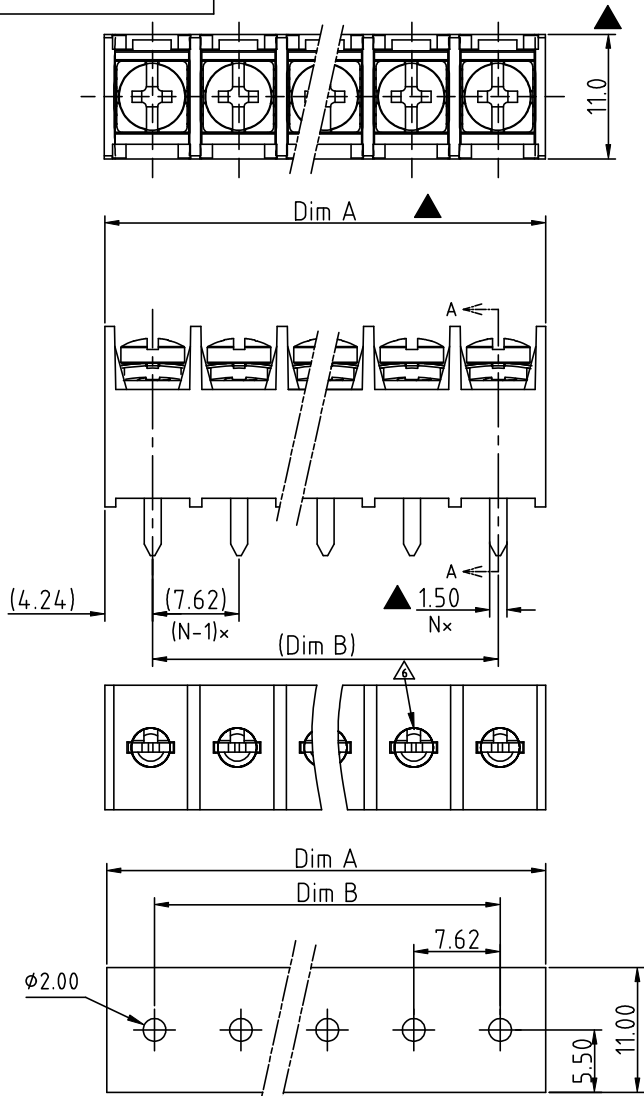

SECTION A-A

P.C.B LAYOUT (Top View)

N= Number of poles

DIM	TOL			
	2P-4P	5P-21P	22P-30P	
Dim A	(N-1)×7.62+8.48	±0.20	±0.30	±0.50
Dim B	(N-1)×7.62			

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
C	△	10 /31'08	Temperature changed from -40°C~+105°C to -40°C~+115°C	Kind
	△	10 /31'08	Screw Torque Value changed from 6.0kgf.cm to 8.6kgf.cm	Kind
	△	10 /31'08	Screw sort changed from M3.0 to #5-40.	Kind
D	△	04 /30'09	Screw Torque Value changed from 8.6kgf.cm to 5.2lb-In	Eris
	△	04/30'09	approved cULus	Eris
E	△	05/04'09	Structure changed	Eris
	△	05/04'09	Dimension allowance	Eris
F	△	11/21'12	Change the screw plating specification	Jacky
	△	11/21'12	Change the dimensional tolerance	Jacky
G	△	04/20'13	Update the drawing	Jacky
	△	04/14'20	Update the drawing	Guoxue
H	△	04/14'20	Add the Amphenol logo&RoHS Compliant &Reference dimension .	Guoxue
	△	04/14'20	Delete the Dim.B Tol.	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300V, 15 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 △ OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 △△ SCREW TORQUE VALUE: 5.2 Lb-In
 WIRE RANGE: 22 - 14 AWG
 1) MOLDED PARTS: THERMOPLASTIC, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t,
 3) TERMINAL SCREWS: STEEL, #5-40

△ Safety Approval: us
 Critical dimension: ▲

△ Reference dimension: (×)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

PART NO.: YK 321 xx 0 x x 00G

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 ...
 30: 30 POLES

G:RoHS compliant(lead-4%)
 in copper alloy

MARK
 0: "@" MARK
 1: "ANY" MARK

TERMINAL & SCREW PLATED
 0: TERMINAL & SCREW: G/F
 △ 1: TERMINAL: G/F, SCREW: Zinc
 2: TERMINAL: Sn, SCREW: G/F
 △△ 3: TERMINAL: Sn, SCREW: Blue Zinc

Amphenol ANYTEK				CUSTOMER COPY		
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE		YK-321 W/O Flange Series				
PART NO.		YK321xx0xx00G		DWG NO.		8YK0001-321
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	
			Guoxue 2020.04.14	Guoxue 2020.04.14		
				Tolerance		
		UNIT: mm		X.		±0.50
		SCALE: NONE		X.X		±0.30
		SHEET: 01/01		REV.: H		X.XX ±0.10
						X° ±1°