

DATA SHEET

NTC THERMISTOR


HIGH SURGE INRUSH CURRENT LIMITER

NT SERIES

RoHS compliant & Halogen free




Product specification— February 19, 2021 V.0

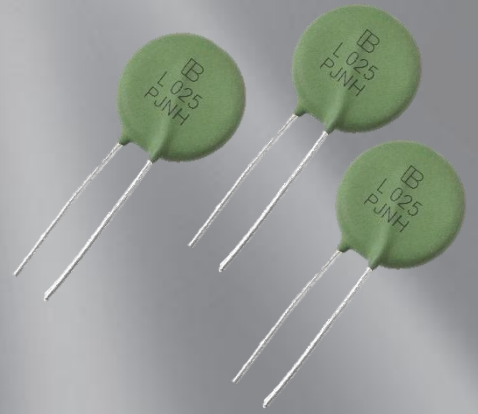

NTC Thermistor NT series Data Sheet

Features

- Effectively restrain surge
- Low power loss under the stable state
- Over-current wide control range and fast response
- Thermal and electrical characteristics of with stability
- Wide range of electrical specifications
- RoHS& Halogen Free (HF) compliant
- Safety certification-UL / TUV

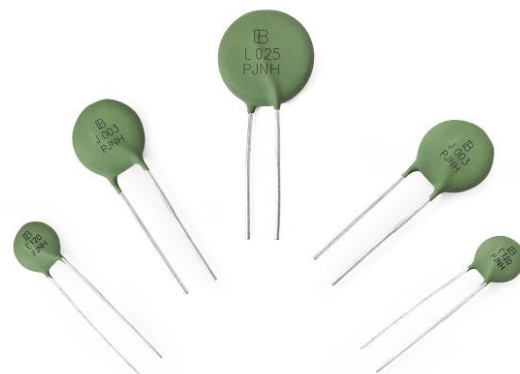


Applications

- Monitor, Sps, Fax, Telecom, Adaptor etc.
- Power supply, Communications equipment etc.

Part Number Code

NT	E	04	—	010	M	F	TR
Series Code	Nominal Diameter	Max. Steady State Current		R25 (Nominal Resistance at 25°C)	Tolerance of R25	Forming Type (Kink)	Packing
High Surge NTC Thermistor	B: 5mm, D: 8mm, E: 10mm, G: 13mm, J: 15mm, L: 20mm,	01~12: 1A~12A R25: 0.25A		0R7: 0.7Ω , 1R3: 1.3Ω, 2R5: 2.5 Ω, 001~008: 1~8Ω, 010~080: 10~80Ω, 120: 120Ω	L: ±15%, M: ±20%	No suffix: Straight leads O: Outside crimped leads F: Y Kinked leads, V: Wider kink leads,	No suffix: Bulk, TB: Tape & Box, TR: Tape & Reel

Marking

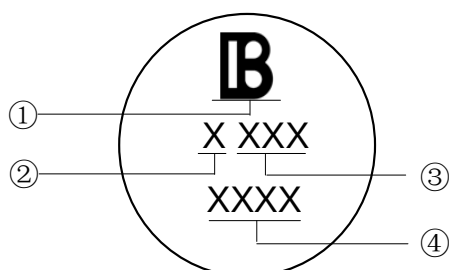

- ① Brightking Logo
- ② Disk Size
- ③ Zero Power Resistance at 25°C
- ④ Internal control code

Electrical Characteristics

Nominal Diameter (mm)	Part Number	Zero Power Resistance at 25℃	Maximum Steady State Current at 25℃	Residual Resistance at 25℃ I _{max} R _{I_{max}}	Typical value		Recommend Capacitance 240Vac	Maximum Steady Power	Operating Temperature Range	U _L	T _{UV}
					Thermal Time Constant	Thermal Dissipation Constant					
		(Ω)	(A)	(Ω)	(s)	(mW/℃)	(μF)	(W)	(℃)		
5(B)	NTB02-005□	5	2	0.325	35	7	60	1.5	-40~+170	V	V
	NTB02-006□	6	2	0.350	35	7	60	1.5	-40~+170	V	V
	NTB02-007□	7	2	0.375	35	7	60	1.5	-40~+170	V	V
	NTB02-008□	8	2	0.400	35	7	60	1.5	-40~+170	V	V
	NTB02-009□	9	2	0.425	35	7	60	1.5	-40~+170	V	V
	NTB02-010□	10	2	0.450	35	7	60	1.5	-40~+170	V	V
	NTB01-012□	12	1	1.250	35	7	60	1.5	-40~+170	V	V
	NTBR25-045□	45	0.25	7.720	35	7	40	1.5	-40~+170	V	V
8(D)	NTD04-003□	3	4	0.150	48	12	220	2.3	-40~+170	V	V
	NTD04-004□	4	4	0.166	48	12	220	2.3	-40~+170	V	V
	NTD04-005□	5	4	0.182	48	9	220	2.3	-40~+170	V	V
	NTD04-006□	6	4	0.191	48	9	220	2.3	-40~+170	V	V
	NTD03-007□	7	3	0.195	48	9	220	2.3	-40~+170	V	—
	NTD03-008□	8	3	0.278	45	12	220	2.3	-40~+170	V	V
	NTD03-009□	9	3	0.283	45	12	220	2.3	-40~+170	V	V
	NTD03-010□	10	3	0.288	45	12	220	2.3	-40~+170	V	V
10(E)	NTE05-001□	1	5	0.082	59	12	330	2.5	-40~+170	V	V
	NTE05-002□	2	5	0.094	59	12	330	2.5	-40~+170	V	V
	NTE05-003□	3	5	0.098	59	12	330	2.5	-40~+170	V	V
	NTE04-005□	5	4	0.152	59	12	330	2.5	-40~+170	V	V
	NTE04-006□	6	4	0.166	59	12	330	2.5	-40~+170	V	V
	NTE04-007□	7	3	0.180	59	12	330	2.5	-40~+170	V	—
	NTE04-008□	8	4	0.194	59	12	330	2.5	-40~+170	V	V
	NTE04-009□	9	4	0.195	59	12	330	2.5	-40~+170	V	V
	NTE04-010□	10	4	0.196	59	12	330	2.5	-40~+170	V	V
	NTE03-011□	11	3	0.293	58	11	270	2.5	-40~+170	V	V
	NTE03-012□	12	3	0.296	58	11	270	2.5	-40~+170	V	V
	NTE03-013□	13	3	0.299	58	11	270	2.5	-40~+170	V	V
	NTE03-014□	14	3	0.302	58	11	270	2.5	-40~+170	V	V
	NTE03-015□	15	3	0.305	62	11	270	2.5	-40~+170	V	V
	NTE03-016□	16	3	0.308	62	11	270	2.5	-40~+170	V	V
	NTE03-017□	17	3	0.311	62	11	270	2.5	-40~+170	V	V
	NTE03-018□	18	3	0.314	62	11	270	2.5	-40~+170	V	V
	NTE03-019□	19	3	0.317	62	11	270	2.5	-40~+170	V	V
	NTE03-020□	20	3	0.320	62	11	270	2.5	-40~+170	V	V
	NTE03-021□	21	3	0.323	62	11	270	2.5	-40~+170	V	V
	NTE03-022□	22	3	0.326	62	11	270	2.5	-40~+170	V	V

NTC Inrush Current Limiter

NT series



Nominal Diameter (mm)	Part Number	Zero Power Resistance at 25°C	Maximum Steady State Current at 25°C	Residual Resistance at 25°C I _{max} R _{I_{max}}	Typical value		Recommend Capacitance 240Vac	Maximum Steady Power	Operating Temperature Range	U _L	T _{UV}
					Thermal Time Constant	Thermal Dissipation Constant					
		(Ω)	(A)	(Ω)	(s)	(mW/°C)	(μF)	(W)	(°C)		
13(G)	NTG07-001□	1	7	0.074	85	18	680	3	-40~+200	V	V
	NTG07-002□	2	7	0.074	85	18	680	3	-40~+200	V	V
	NTG07-003□	3	7	0.074	85	18	680	3	-40~+200	V	V
	NTG06-005□	5	6	0.120	93	17	560	3	-40~+200	V	V
	NTG05-006□	6	5	0.163	90	17	560	3	-40~+200	V	V
	NTG05-007□	7	5	0.171	80	19	560	3	-40~+200	V	V
	NTG05-008□	8	5	0.155	91	15	560	3	-40~+200	V	V
	NTG05-009□	9	5	0.163	89	15	560	3	-40~+200	V	V
	NTG05-010□	10	5	0.171	87	14	560	3	-40~+200	V	V
	NTG04-011□	11	4	0.241	87	14	560	3	-40~+200	V	V
	NTG04-012□	12	4	0.243	87	14	560	3	-40~+200	V	V
	NTG04-013□	13	4	0.244	87	14	560	3	-40~+200	V	V
	NTG04-014□	14	4	0.245	87	14	560	3	-40~+200	V	V
	NTG04-015□	15	4	0.247	87	14	560	3	-40~+200	V	V
	NTG04-016□	16	4	0.250	87	15	560	3	-40~+200	V	V
	NTG04-017□	17	4	0.255	87	15	560	3	-40~+200	V	V
	NTG04-018□	18	4	0.260	87	15	560	3	-40~+200	V	V
	NTG04-019□	19	4	0.265	87	15	560	3	-40~+200	V	V
	NTG04-020□	20	4	0.270	87	15	560	3	-40~+200	V	V
15(J)	NTJ09-001□	1	9	0.051	104	20	1000	4	-40~+200	V	V
	NTJ09-002□	2	9	0.056	104	20	820	4	-40~+200	V	V
	NTJ09-2R5□	2.5	9	0.063	104	20	820	4	-40~+200	V	V
	NTJ09-003□	3	9	0.059	106	20	820	4	-40~+200	V	V
	NTJ08-005□	5	8	0.082	110	20	820	4	-40~+200	V	V
	NTJ06-008□	8	6	0.142	99	15	680	4	-40~+200	V	V
	NTJ06-009□	9	6	0.143	99	16	680	4	-40~+200	V	V
	NTJ06-010□	10	6	0.145	99	19	680	4	-40~+200	V	V
	NTJ06-011□	11	6	0.148	99	19	680	4	-40~+200	V	V
	NTJ06-012□	12	6	0.149	99	21	680	4	-40~+200	V	V
	NTJ06-013□	13	6	0.152	99	19	680	4	-40~+200	V	V
	NTJ06-014□	14	6	0.156	99	19	680	4	-40~+200	V	V
	NTJ06-015□	15	6	0.159	99	17	680	4	-40~+200	V	V
	NTJ04-040□	40	4	0.292	101	20	680	4	-40~+200	V	V
20(L)	NTL12-0R7□	0.7	12	0.039	160	28	1200	5	-40~+200	V	V
	NTL12-001□	1	12	0.039	160	28	1200	5	-40~+200	V	V
	NTL12-002□	2	12	0.041	160	28	1200	5	-40~+200	V	V
	NTL12-2R5□	2.5	12	0.046	120	24	1200	5	-40~+200	V	V
	NTL12-003□	3	12	0.050	130	24	1200	5	-40~+200	V	V
	NTL10-005□	5	10	0.068	144	24	1200	5	-40~+200	V	V
	NTL10-006□	6	10	0.072	144	24	1200	5	-40~+200	V	V

Remarks: □ means tolerance of R25 , L: ±15%, M: ±20%,



Reliability Test Requirements

Test items Reference standard	Test conditions			Criterion
High Temperature Storage IEC 60068-2-2	$T_U \pm 5^\circ\text{C}$, 1000 $\pm$ 24hrs			No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
Damp Heat, Steady State IEC 60068-2-78	40 $\pm$ 2 $^\circ\text{C}$, 90~95%RH , 1000 $\pm$ 24hrs			No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
Endurance IEC 60539-1	25 $\pm$ 5 $^\circ\text{C}$, I _{max} .1000 $\pm$ 24hrs			No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
Rapid Change of Temperature IEC 60068-2-14	Step	Temperature ($^\circ\text{C}$)	Period (min.)	No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
	1	$T_L \pm 5$	30 $\pm$ 3	
	2	Room	5 $\pm$ 3	
	3	$T_U \pm 5$	30 $\pm$ 3	
	4	Room	5 $\pm$ 3	
	5 Cycles			
Capacitance test standard specifications	25 $\pm$ 5 $^\circ\text{C}$, C _{th} , interval 2mins. , Number of cycles: 1000 , C _{th} =Capacitance at 340 VDC			No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
Cyclic endurance IEC 60539-1	25 $\pm$ 5 $^\circ\text{C}$, I _{max} .1min ON/5min OFF*1000cycles;			No visible damage $\Delta R_{25}/R_{25}$ $\leq 20\%$
Insulation Test MIL-STD-202F-Method 302	1000 VDC, 1min			No visible damage
Tensile Strength of Terminals IEC 60068-2-21	Gradually applying the force specified and keeping the unit fixed for 10 $\pm$ 1 sec.			No visible damage $\Delta R_{25}/R_{25}$ $\leq 10\%$
	Terminal diameter (mm)		Force (kg)	
	0.5<d $\leq$ 0.8		1.0	
	0.8<d $\leq$ 1.25		2.0	
Bending Strength of Terminals IEC60068-2-21	Follow spec: Hold specimen and apply the force specified below to each lead. Bend the specimen to 90°, then return to the original position. Repeat the procedure in the opposite direction.			No visible damage $\Delta V/V_{1mA}$ $\leq 5\%$
	Terminal diameter (mm)		Force (kg)	
	0.5<d $\leq$ 0.8		0.5	
	0.8<d $\leq$ 1.25		1.0	
	1.25<d		2.0	
Solderability IEC 60068-2-20	245 $\pm$ 3 $^\circ\text{C}$, 3 $\pm$ 0.3 sec			$\geq 95\%$
Resistance to Soldering Heat IEC 60068-2-20	260 $\pm$ 3 $^\circ\text{C}$, 10 $\pm$ 1 sec			$\Delta R/R$ $\leq 5\%$

Resistance–Temperature Characteristic Curves

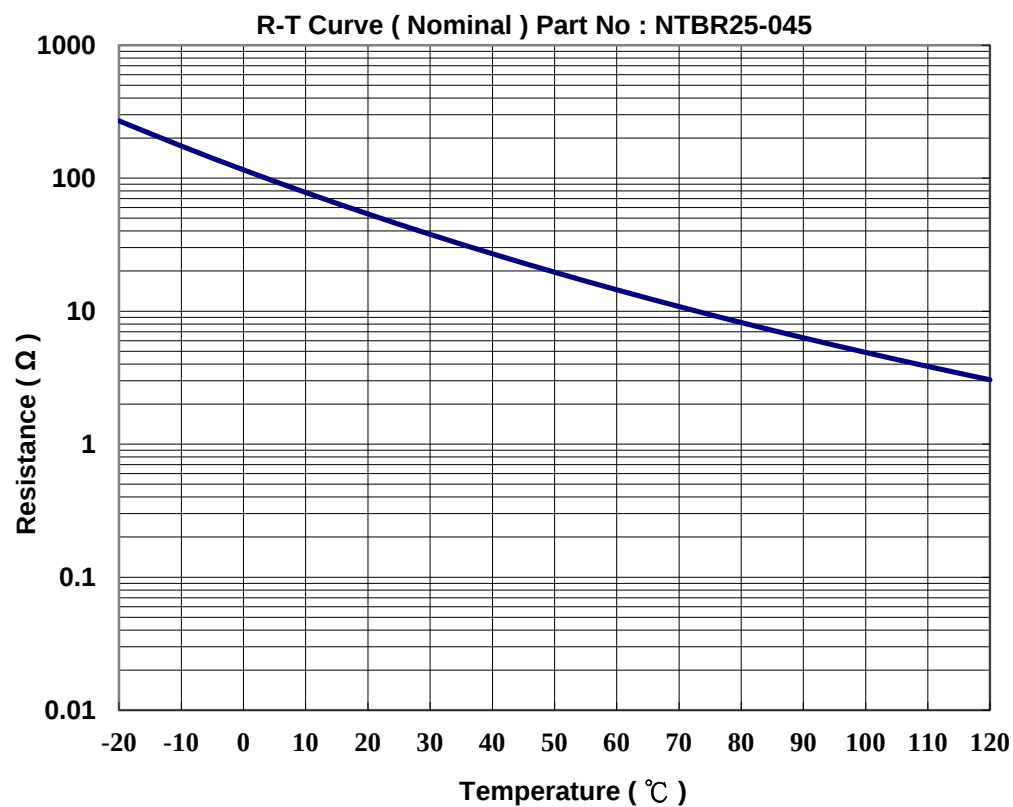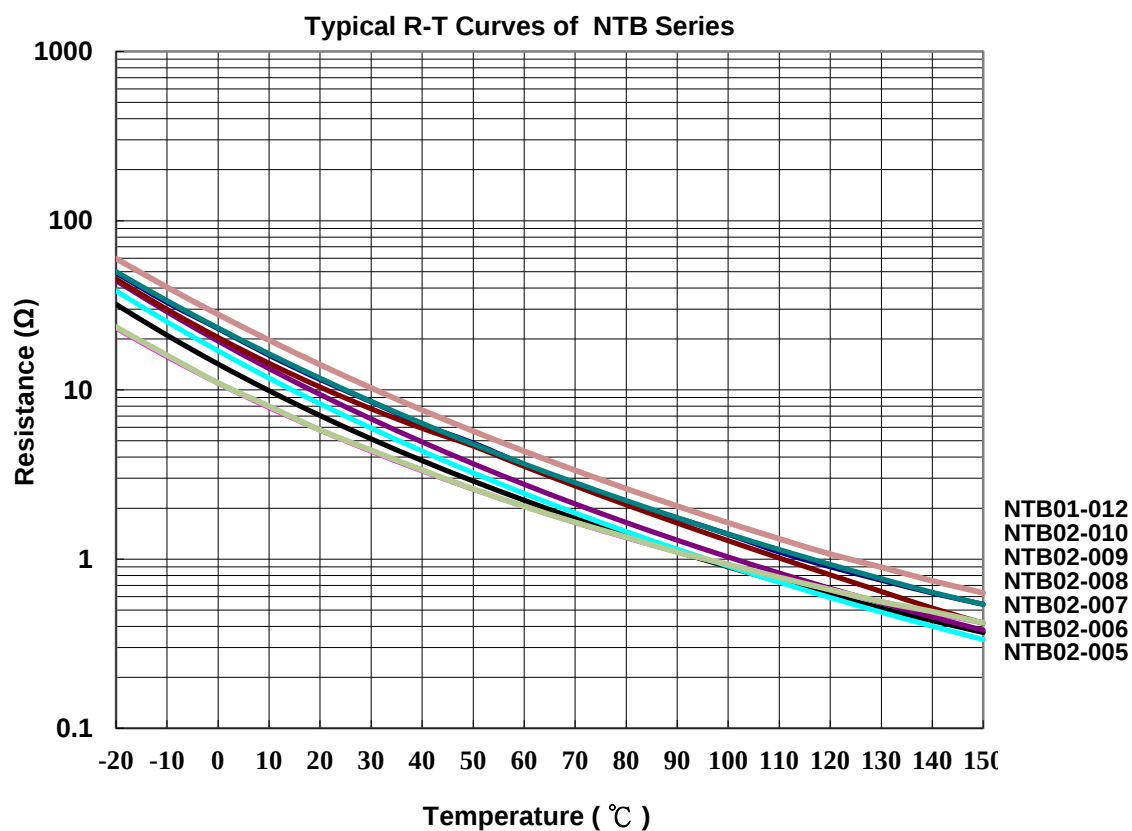


Resistance–Temperature Characteristic Curves

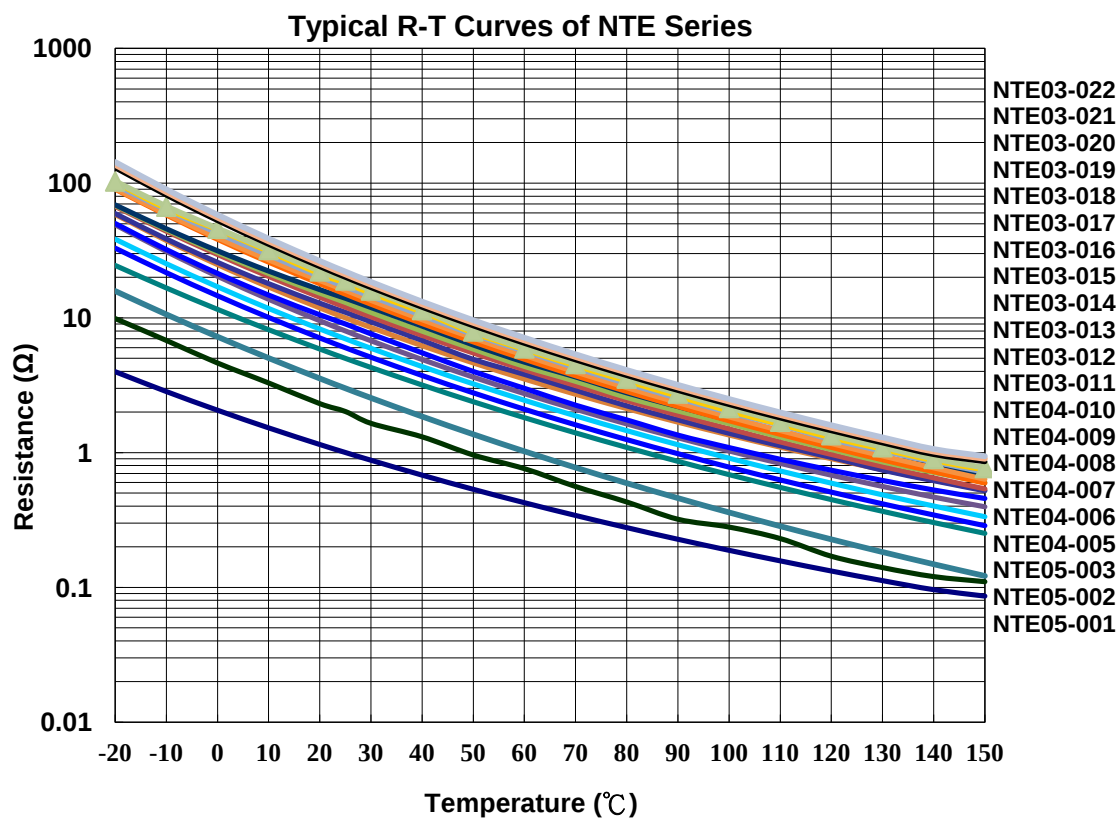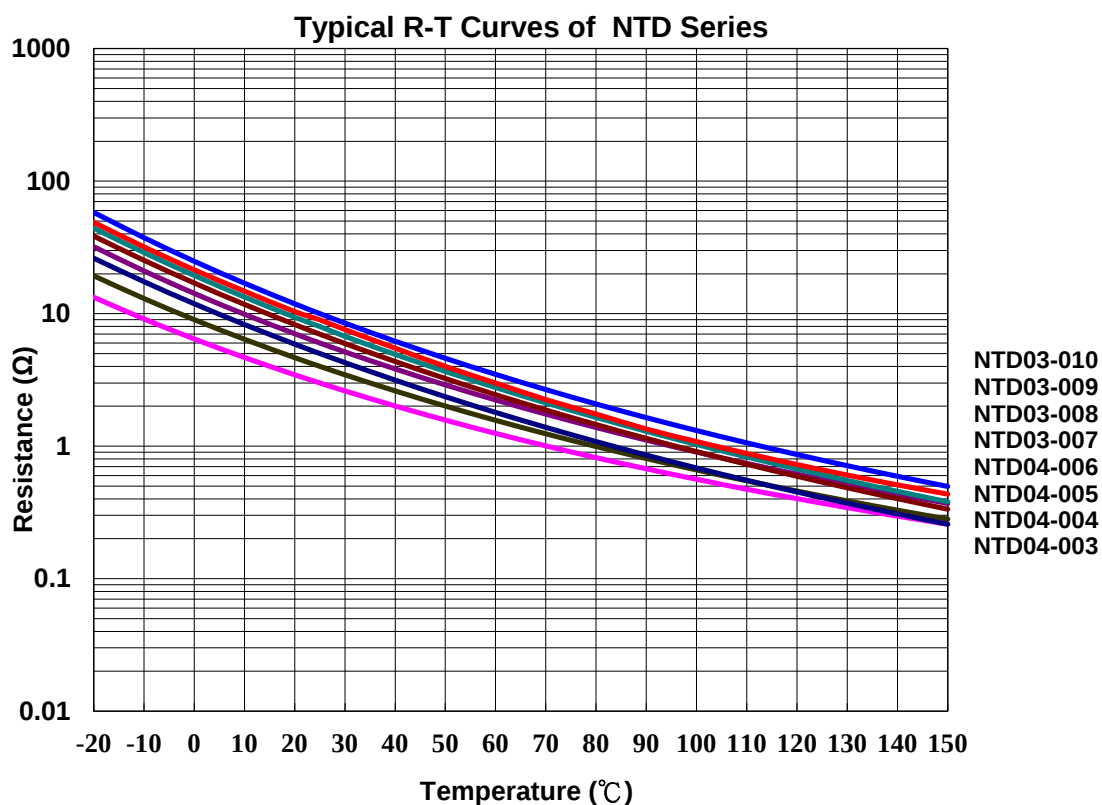


Resistance–Temperature Characteristic Curves


Typical R-T Curves of NTG Series

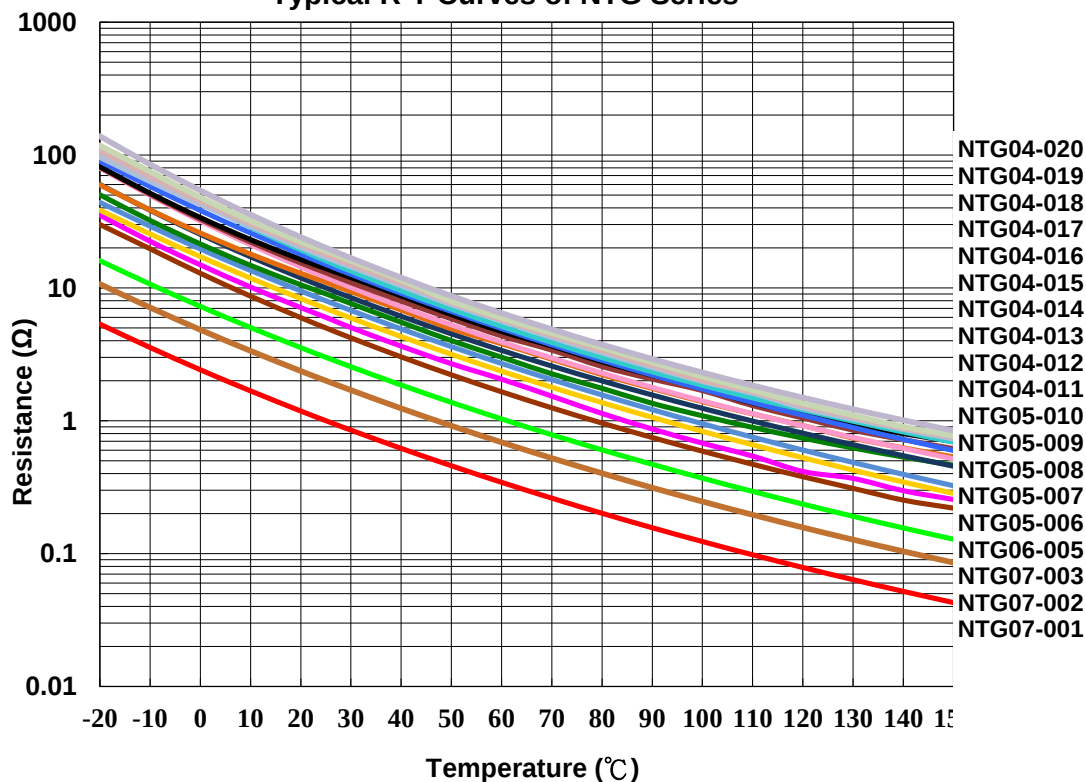



Typical R-T Curves of NTJ Series

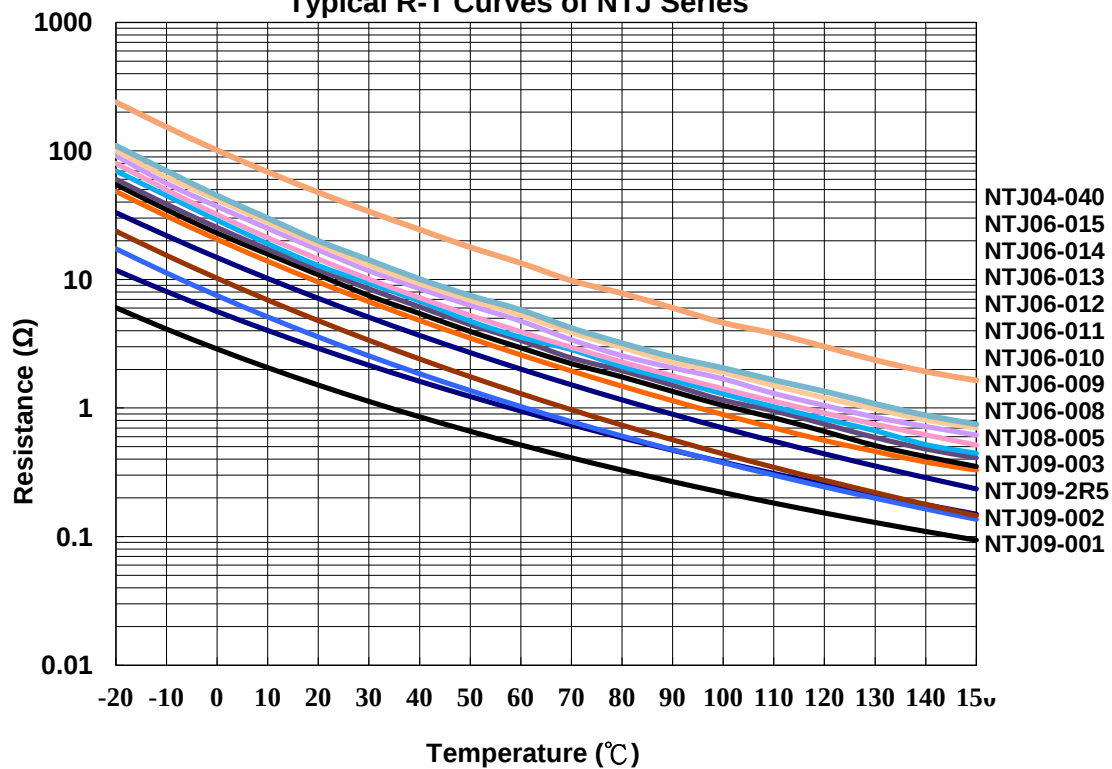



Resistance–Temperature Characteristic Curves

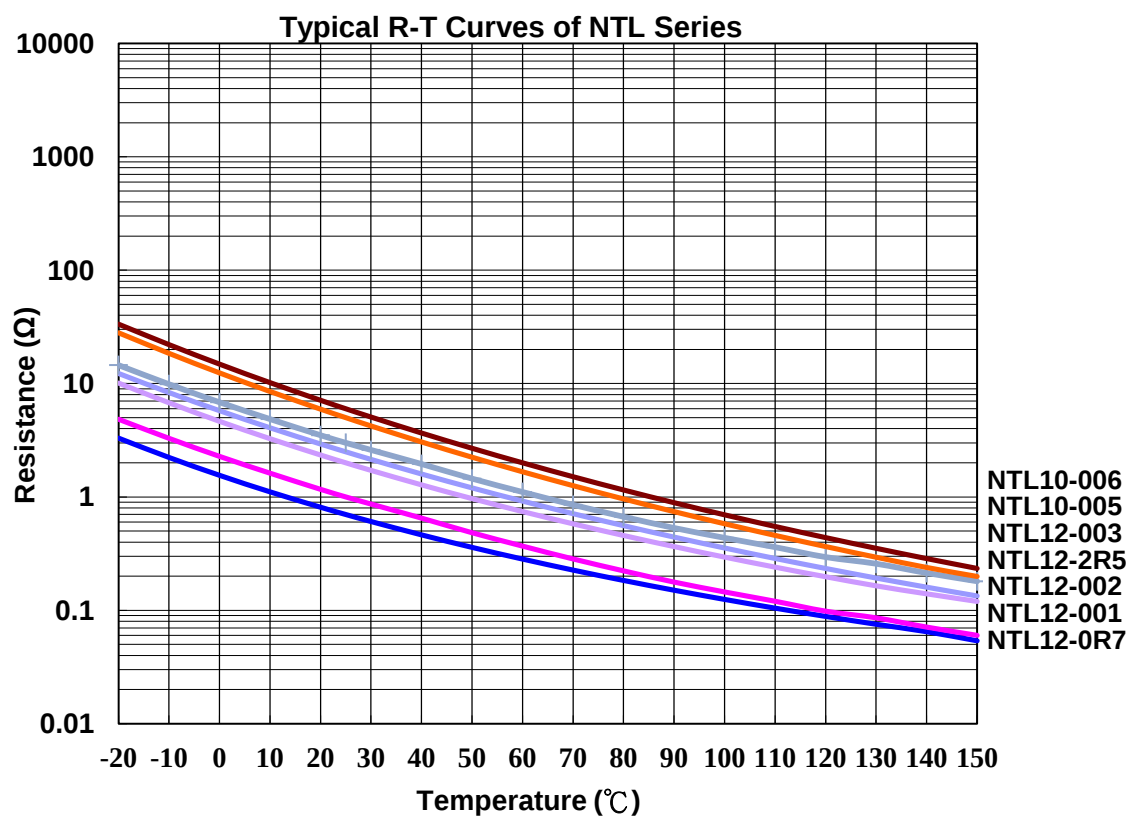



V-I Characteristic Curves

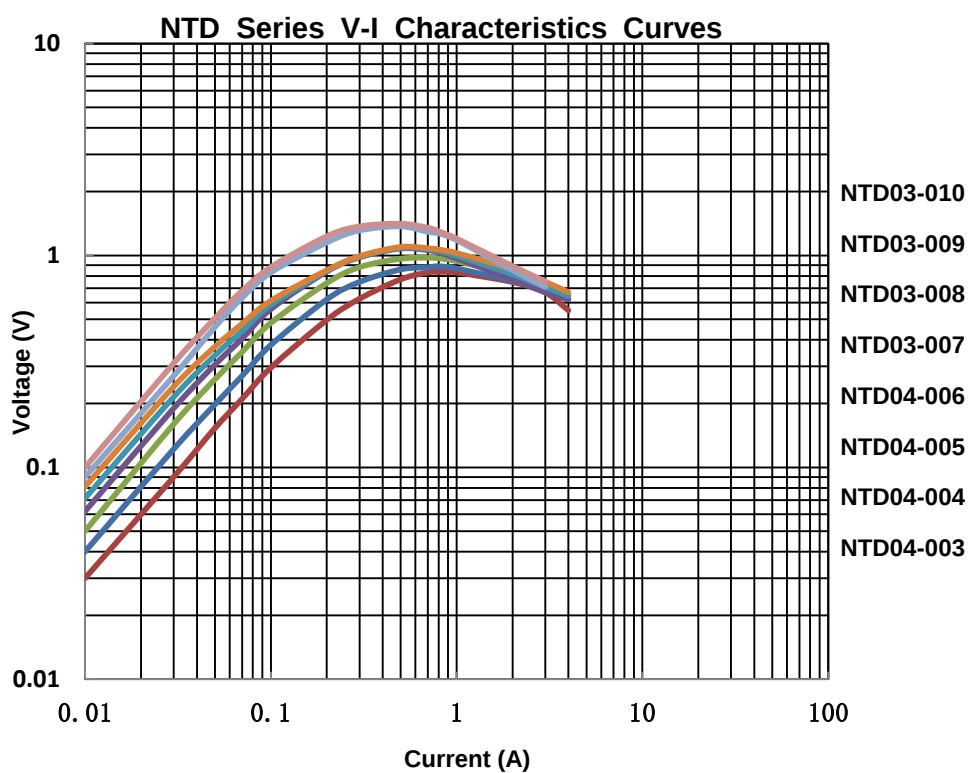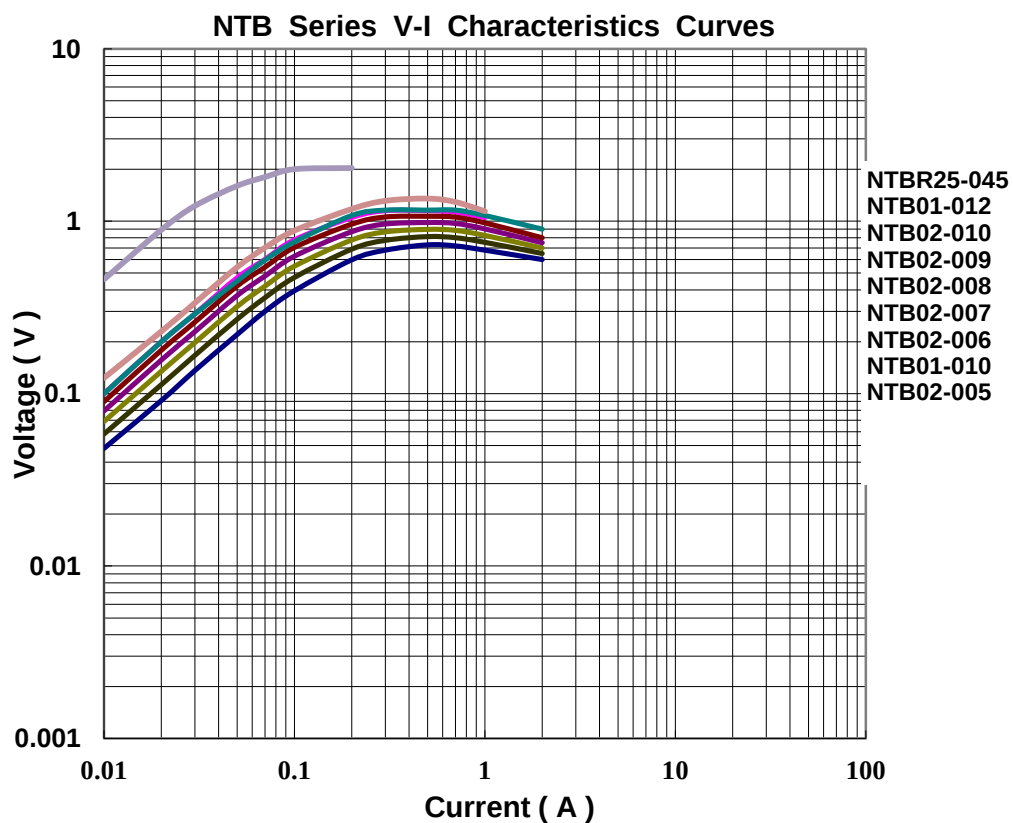

V-I Characteristic Curves

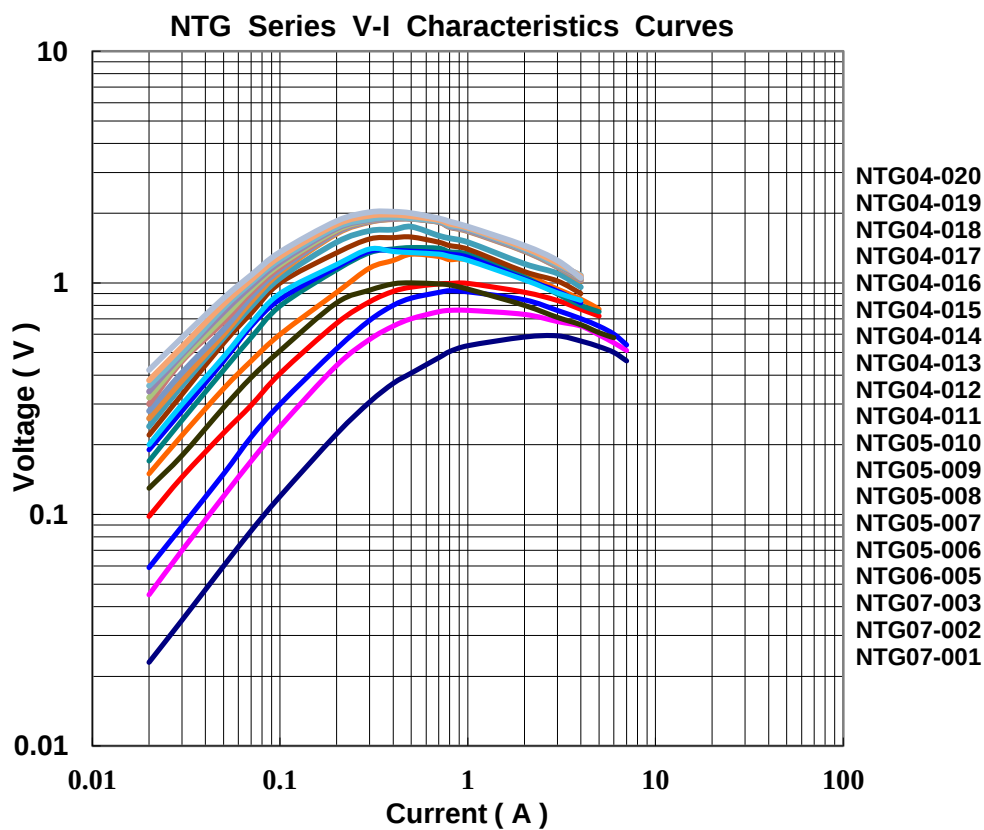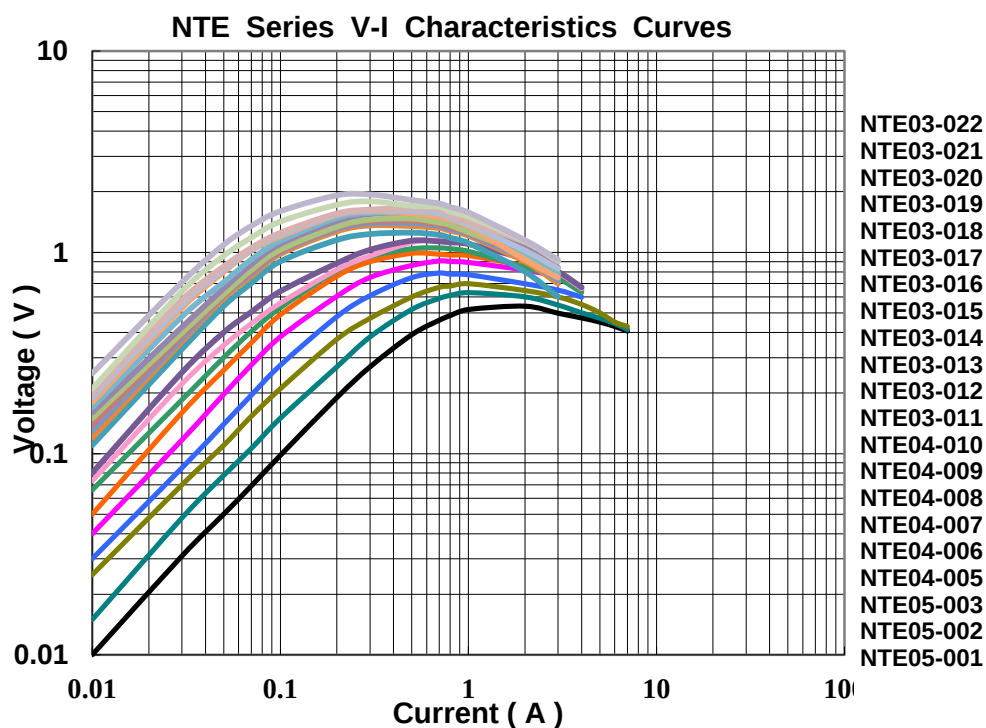


V-I Characteristic Curves

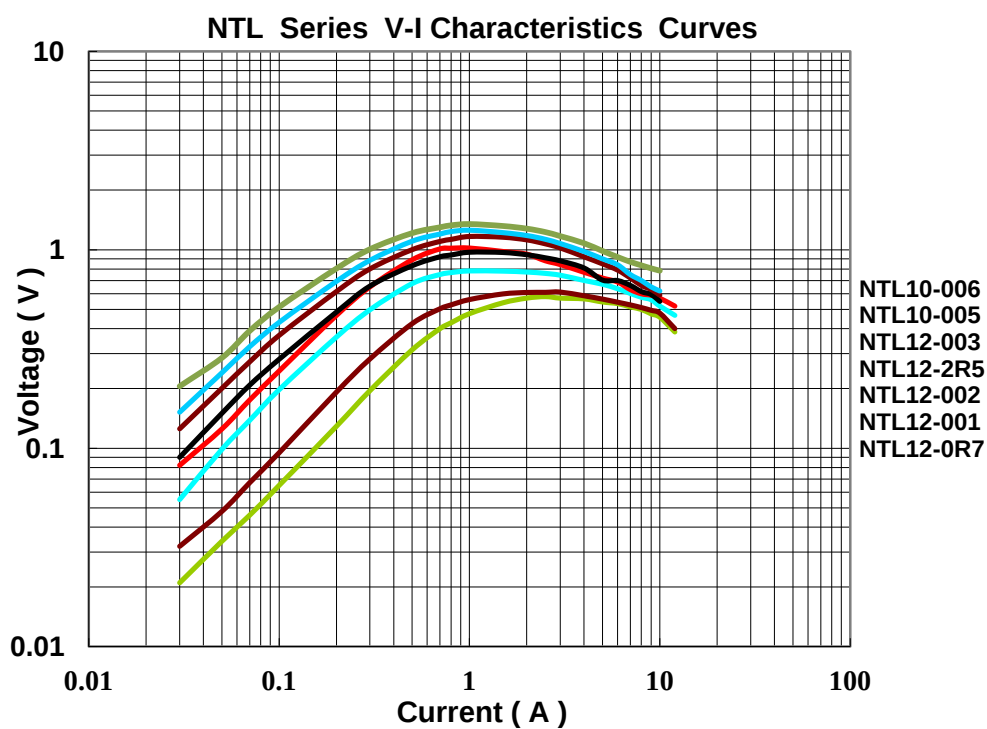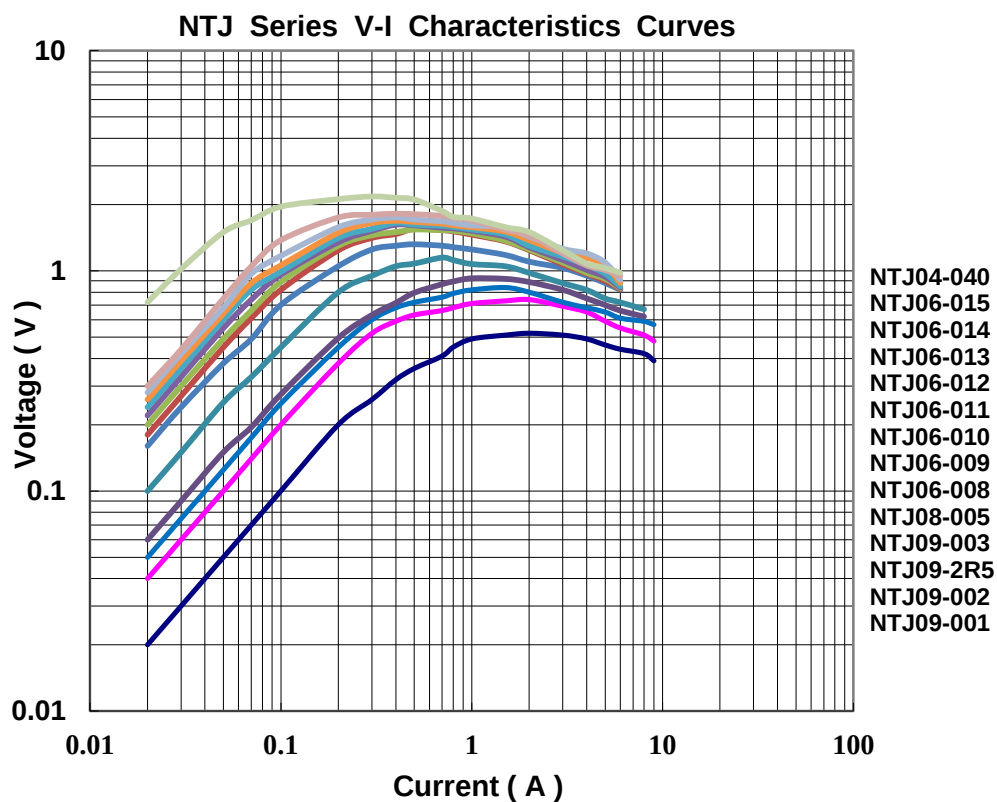

Soldering Recommendation

Wave Soldering Recommendation

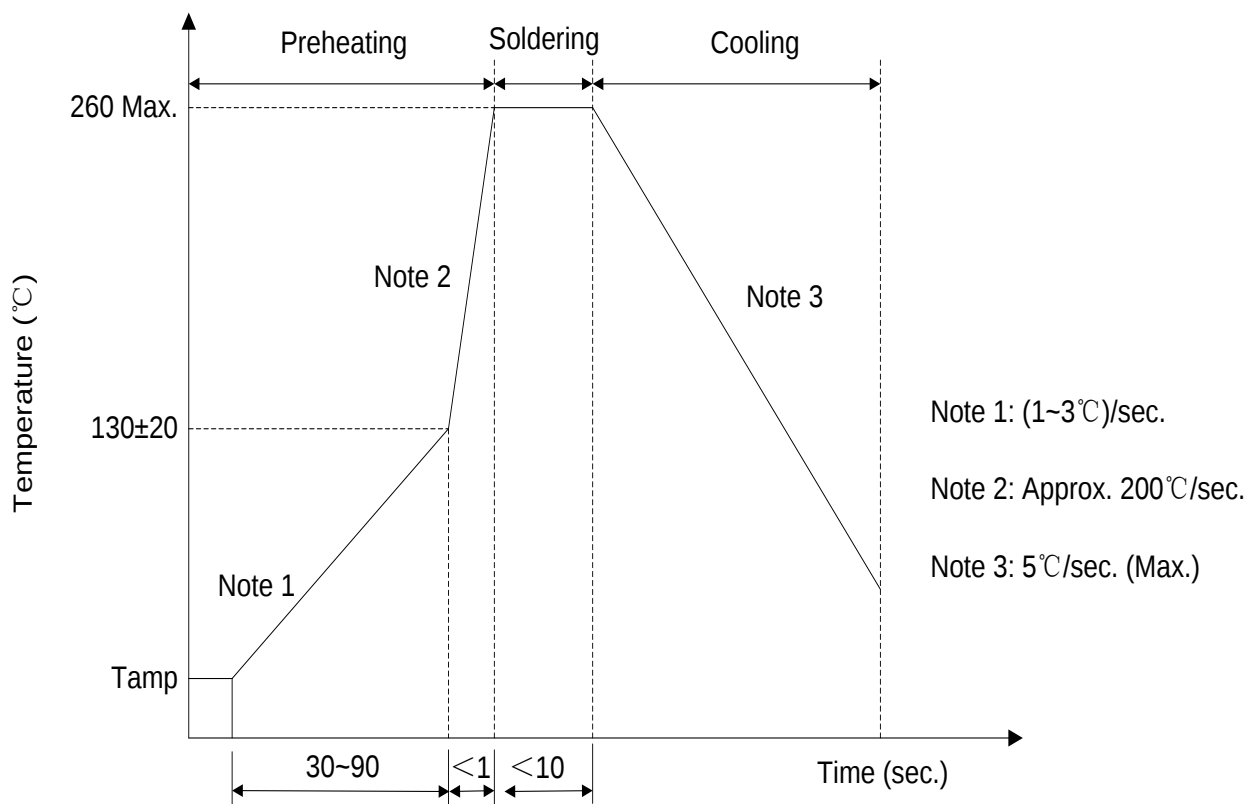

Recommendation Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 seconds (max.)
Distance from Thermistor	2mm (min.)

Packaging

Taping

Tape & Box

Tape & Reel

Default Straight


NTB(5Φ) only :V-type

O-type

F-type

Dimensions	W	W0	W1	W2	H0	H2	D0	t	l
(Unit: mm)	18.0 ±1.0	12.0 ±1.0	9.0 +0.5/-0	Max 3.0	16.0 ±1.0	20.0 ±2.0	4.0 ±0.2	0.6 ±0.1	Max 2
Disc Φ	P0	P1 (±0.7)	P2 (+1.3/-0)	P (+1.0)	H (±1.0)	B (Max)		SPQ P0: 12.7mm	
								Taping & Box	Taping & Reel
5(B)	12.7±0.3	3.85	6.35	12.7	0±2	32		1500pcs/Box	1500pcs/Box
8(D)	12.7±0.3	3.85	6.35	12.7	0±2	33		1500pcs/Box	1500pcs/Box
10(E)	12.7±0.3	3.85	6.35	25.4	0±2	36		500pcs/Box	600pcs/Box
13(G)	12.7±1.0	8.95	12.7	25.4	0±4	40		500pcs/Box	600pcs/Box
15(J)	12.7±1.0	8.95	12.7	25.4	0±4	42		500pcs/Box	600pcs/Box
20(L)	12.7±1.0	8.95	12.7	25.4	0±4	45		400pcs/Box	400pcs/Box

■ Bulk Packing

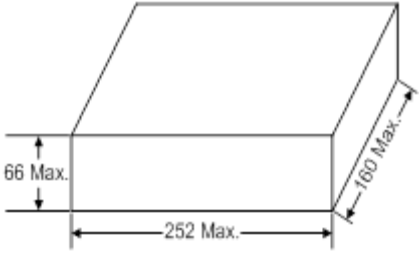Bulk (Unit: mm)	Disc Φ	SPQ (pcs / Bag)	Quantity	
			(Bags / Box)	(pcs / Box)
	Φ5 (NTB)	700	2	1400
	Φ8 (NTD)	500	2	1000
	Φ10 (NTE)	500	2	1000
	Φ13 (NTG)	300	2	600
	Φ15 (NTJ)	125	4	500
	Φ20 (NTL)	75	4	300

Warehouse Storage Conditions

- Storage temperature: -10℃~+40℃.
- Relative humidity: ≤80%RH.
- Keep away from corrosive atmosphere and sunlight.
- Period of Storage: 1 year.