



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED

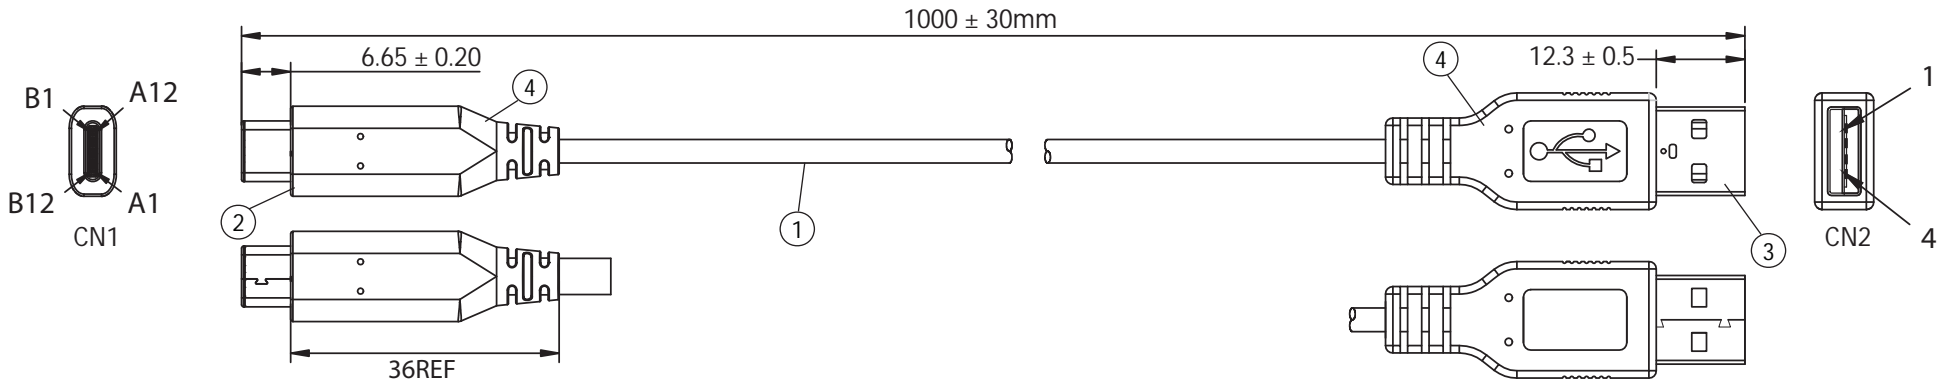


P/N: 3021092-01M  
 USB 2.0(A)/M - USB2.0(C)/M  
 Length:1M  
 Color:White

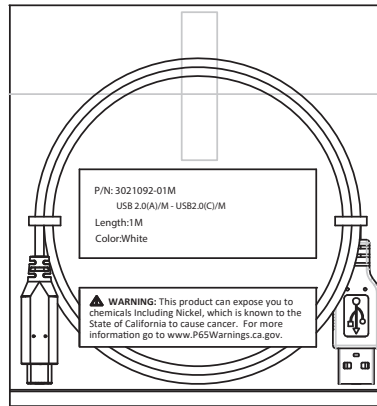

**NOTES:**

- CABLE:**  
 28AWGx2C+22AWGx1C+AB 80%  
 PVC OUTER JACKET: WHITE, OD: 3.0 ± 0.2mm
- CONNECTOR: USB 2.0 TYPE C MALE**  
 INSULATOR: BLACK PBT  
 PIN G/F  
 NICKEL PLATED SHELL
- CONNECTOR: USB 2.0 TYPE A MALE**  
 INSULATOR: WHITE PBT  
 PIN G/F  
 NICKEL PLATED SHELL
- PVC MOLDED: COLOR 45P WHITE**
- ELECTRICAL TEST:**  
 <1>.100% OPEN SHORT & MISS WIRE TEST  
 <2>.HI-POT: 50V AC/0.01 SEC 50V DC/0.01 SEC  
 <3>.INSULATION RESISTANCE: 10M OHM (MIN)  
 <4>.CONDUCTIVE RESISTANCE: 2 OHM (MAX)  
 <5>.RESISTANCE DETECTION: Rp 56Kohm ± 10% BETWEEN A4 AND A5
- DATA TRANSFER RATE UP TO 480Mbps (NOMINAL)**
- CURRENT RATING UP TO 3A (NOMINAL)**
- VOLTAGE RATING UP TO 20V (NOMINAL)**
- PACKING: 1PC/POLYBAG W/ LABEL**

**PIN OUT**

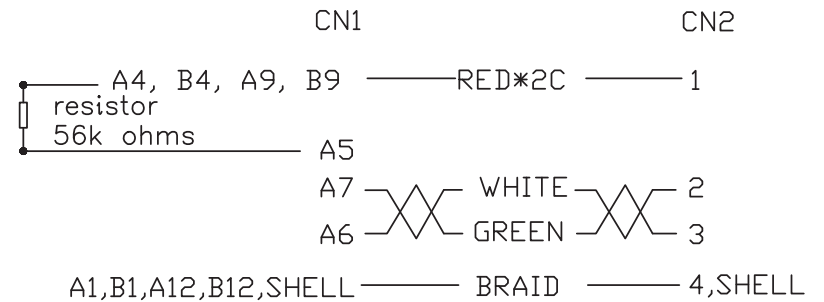

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 3021092-01M	RoHS Compliant	
0-1	0.15	Description: USB 2.0(A)/M - USB 2.0 (C)/M		
1-6	0.20	UNIT: mm		
6-18	0.30	Drawn / Date	Checked / Date	Approved / Date
18-50	0.50	R. Nuti 10-29-18	10-29-18	LY / 10-29-18
50-120	0.70			
120-250	0.90			
250-500	1.20			