


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION |             |      |          |
|----------|-------------|------|----------|
| REV.     | DESCRIPTION | DATE | APPROVED |
|          |             |      |          |
|          |             |      |          |
|          |             |      |          |

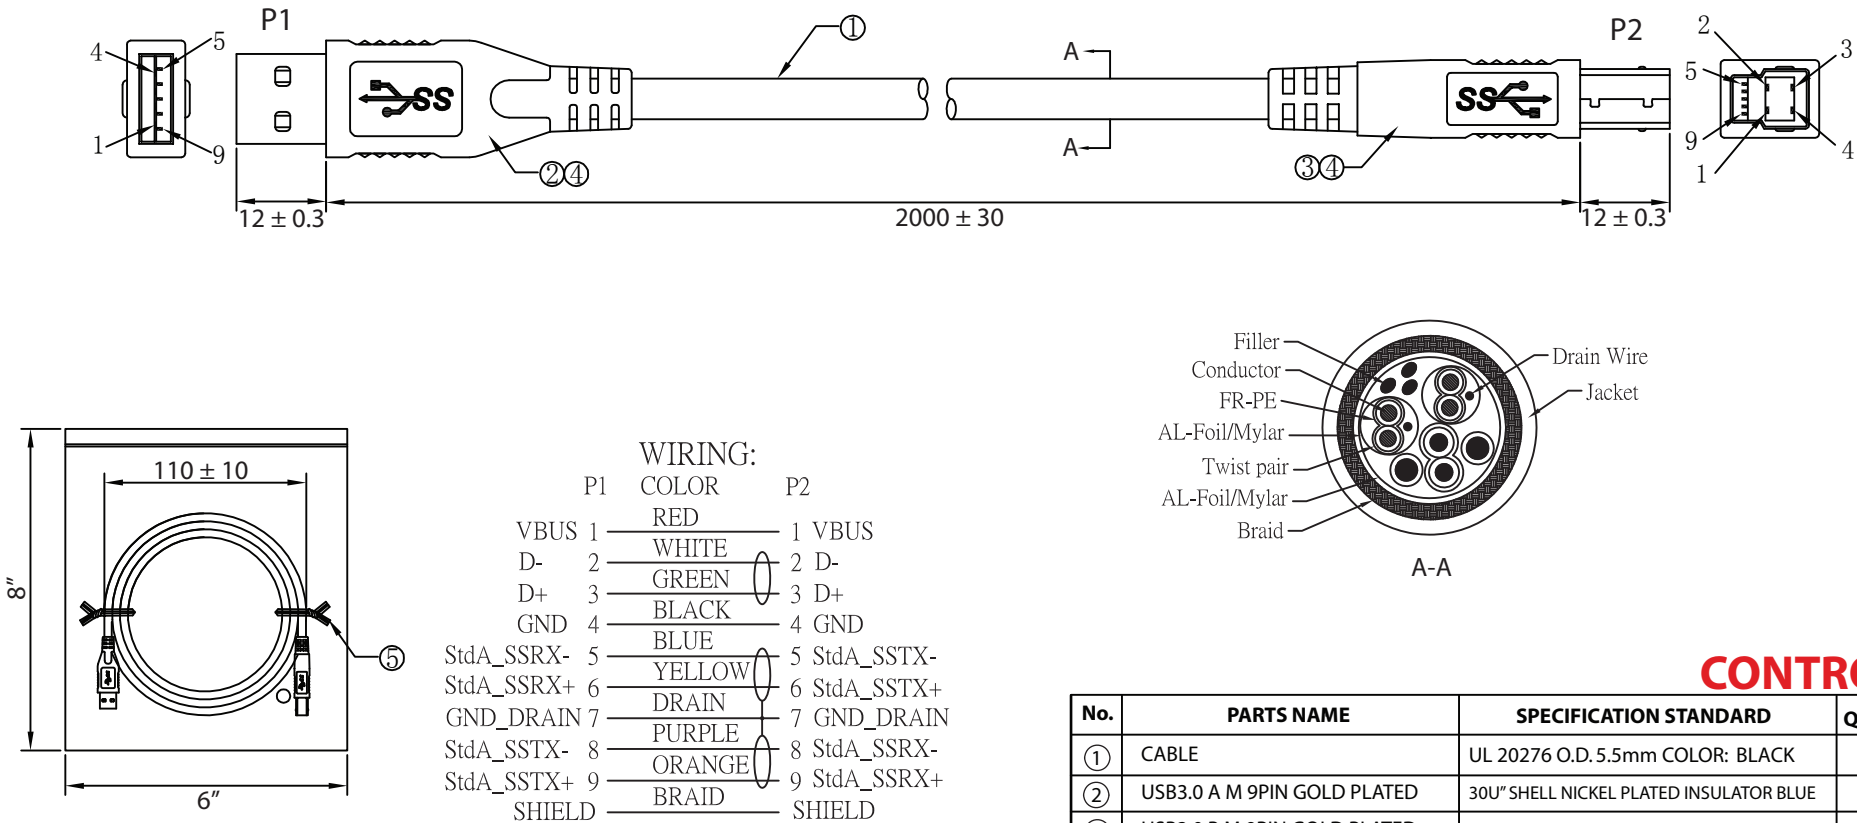

- NOTES:
- CABLE: UL20276  
(1Px30AWG+D+AL+MY)x2C+1Px30AWG+2Cx24AWG+AL+B  
OUTER JACKET: BLACK, O.D.: 5.5mm
  - CONNECTORS: USB 3.0 A MALE TO USB 3.0 B MALE
  - HOOD: MOLDED TYPE, COLOR: BLACK
  - PACKING: 1PC/POLYBAG
  - RoHS COMPLIANT

CONTROLLED

| No.                | PARTS NAME                  | SPECIFICATION STANDARD                               | QTY            | REMARKS         |
|--------------------|-----------------------------|------------------------------------------------------|----------------|-----------------|
| ①                  | CABLE                       | UL 20276 O.D.5.5mm COLOR: BLACK                      | 1              |                 |
| ②                  | USB3.0 A M 9PIN GOLD PLATED | 30U" SHELL NICKEL PLATED INSULATOR BLUE              | 1              |                 |
| ③                  | USB3.0 B M 9PIN GOLD PLATED | 30U" SHELL NICKEL PLATED INSULATOR BLUE              | 1              |                 |
| ④                  | PVC                         | 45P PVC BLACK                                        | 14             | g               |
| ⑤                  | CABLE TIE                   | L=9cm COLOR: BLACK                                   | 2              |                 |
| Dim range (mm)     |                             | Qualtek Electronics Corp.<br>WCI DIVISION            |                |                 |
|                    |                             | Part Number: 3023015-02M <span>RoHS Compliant</span> |                |                 |
| Tolerance +/- (mm) |                             | Description: USB 3.0 A/M - USB 3.0 B/M               |                |                 |
| 0-1                | 0.15                        | UNIT: mm                                             |                |                 |
| 1-6                | 0.20                        |                                                      |                |                 |
| 6-18               | 0.30                        |                                                      |                |                 |
| 18-50              | 0.50                        |                                                      |                |                 |
| 50-120             | 0.70                        | Drawn / Date                                         | Checked / Date | Approved / Date |
| 120-250            | 0.90                        | R.Nuti<br>06-25-10                                   | 06-25-10       | LY / 06-25-10   |
| 250-500            | 1.20                        |                                                      |                |                 |