


Model No.: **GP312G**

NO MERCURY & CADMIUM ADDED	
Description	: Extra Heavy Duty Battery, 3R12
Chemical System	: Zinc-Manganese dioxide (Zinc Chloride)
Nominal Voltage	: 4.5 Volts
Max. Dimensions	: 22.0 mm x 62.0 mm x 67.0 mm
Terminals	: stainless steel(+) and stainless steel(-)
Jacket	: Plastic Jacket, ultrasonic welded
Warranty Period	: 24 months (Storing at -10°C to 25°C and 60±10%RH)
Weight(Reference)	: 105g

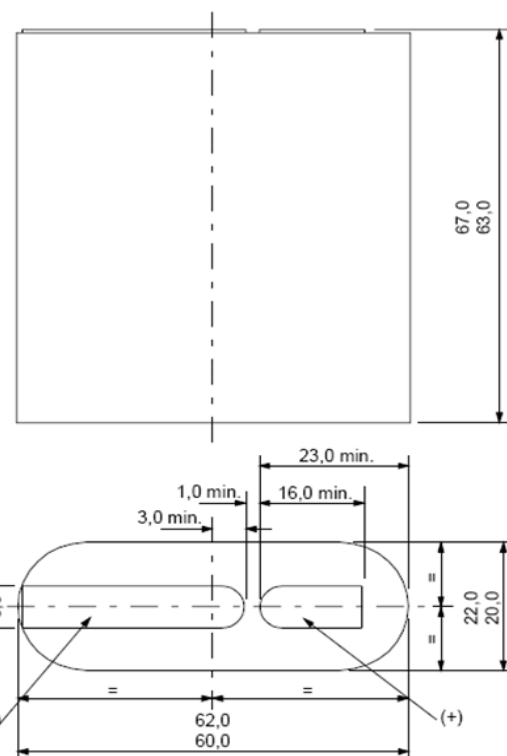


Cross References:

GP	IEC	JIS
312G	3R12	3R12

Estimated Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
220 Ohms	4 hr/day	2.7V	120 hrs

220 Ohms, 4 Hour / Day, EPV: 2.7 V

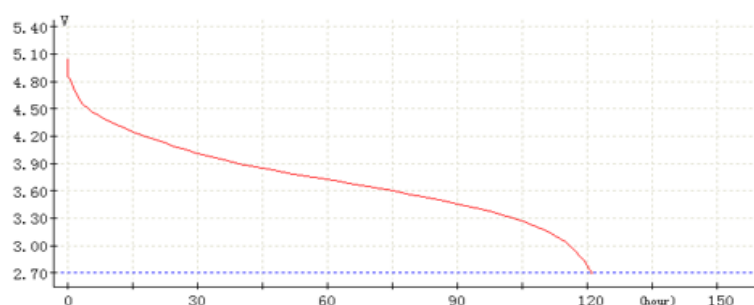

At 20±2°C, RH55±20% within 30 days of manufacture

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design,model and specification without prior notice.

Copyright@ GPI International Ltd. - All rights reserved

 Member
Gold Peak Group