



© COPYRIGHT 1998 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005, Total Pages: 2												
DCP #	REV	Effective: 7/15/97. DCP No: 229 Supersedes DCP No: 103												
436	A	RELEASED												
		<table border="1"> <tr> <th>DRAWN</th> <th>DATE</th> <th>CHECKD</th> <th>DATE</th> <th>APPRD</th> <th>DATE</th> </tr> <tr> <td>DJC</td> <td>7/9/98</td> <td>JC</td> <td>7/21/98</td> <td>JWM</td> <td>7/22/98</td> </tr> </table>	DRAWN	DATE	CHECKD	DATE	APPRD	DATE	DJC	7/9/98	JC	7/21/98	JWM	7/22/98
DRAWN	DATE	CHECKD	DATE	APPRD	DATE									
DJC	7/9/98	JC	7/21/98	JWM	7/22/98									

Agency Approvals: UL Recognized – Guide IZLT2, File E14853
 CSA Certified – CLASS 6225-01, FILE E47235
 Temperature Rating: 150°C.
 Current: 30A
 Voltage: 250 VAC

CE logo denotes compliance with European Union Low Voltage Directive (50–1000 VAC, 75–1500 VDC).

General Information:
 Bayonet Type Knob.
 For 1/4" X 1-1/4" Fuses.
 Vibration resistant.
 For panels up to 5/16" (7.9mm) thick.

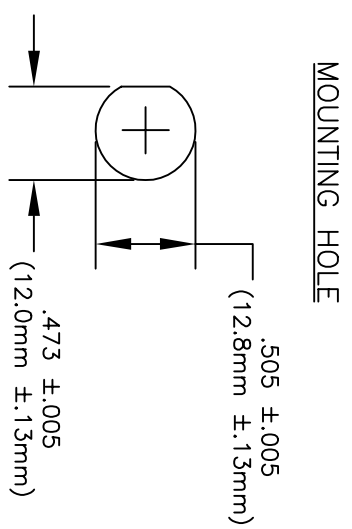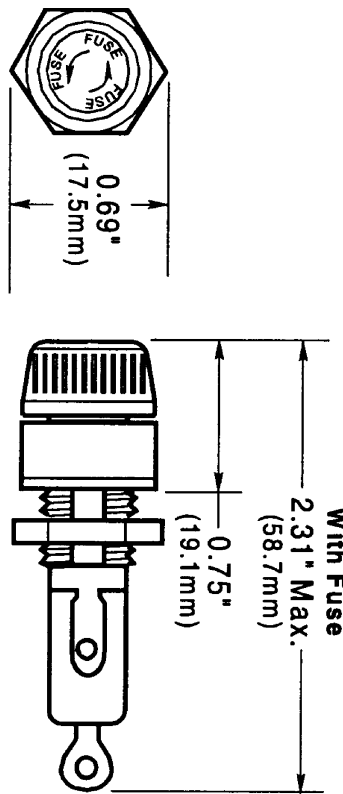

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, WE CANNOT GUARANTEE THE PERFORMANCE OF THE PRODUCT UNDER THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

multicomp[®]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWING TITLE: PANEL MOUNT FUSEHOLDER	
DRAWN BY: DANIEL CAREY	DATE: 7/9/98	SIZE A	DWG. NO. MCHKP
CHECKED BY: JOHN COLE	DATE: 7/21/98	SCALE: NTS	ELECTRONIC FILE 92N5191.DWG
APPROVED BY: JEFF MCWICKER	DATE: 7/22/98		REV A