


RoHS  
Compliant

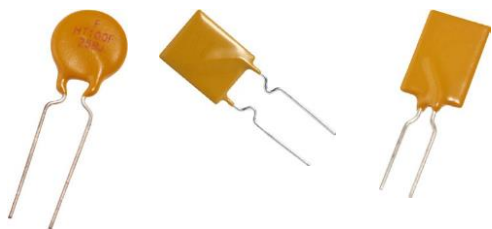

## Specifications


Applications : Wide variety of electronic equipment  
 Product Features : Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 16V and Operating temperatures up to 125°C.  
 Operation Current : 0.5A to 15A  
 Maximum Voltage : 16V/30V DC  
 Temperature Range : -40°C to 125°C

## Electrical Characteristics (23°C)

Part Number	Hold Current I <sub>H</sub> , A	Trip Current I <sub>T</sub> , A	Max.Time to Trip at 5 x I <sub>H</sub> , S	Maximum Current I <sub>MAX</sub> , A	Rated Voltage V <sub>MAX</sub> , VDC	Typical Power Pd, W	Resistance	
							R <sub>MIN</sub> Ω	R <sub>1MAX</sub> Ω
MP008029	0.5	0.9	2.5	40	30	0.9	0.4800	1.1
MP008030	0.7	1.4	3.2	40	30	1.4	0.3000	0.8
MP008031	1	1.8	5.2	40	30	1.4	0.1800	0.43
MP008032	2	3.8	3	100	16	1.4	0.0450	0.11
MP008033	3	6	5	100	16	3	0.0330	0.079
MP008034	4	7	5	100	16	3.3	0.0240	0.06
MP008035	4.5	7.8	3	100	16	3.6	0.0220	0.054
MP008036	5.5	10	6	100	16	3.5	0.0150	0.037
MP008037	6	10.8	5	100	16	4.1	0.0130	0.032
MP008038	6.5	12	5.5	100	16	4.3	0.0110	0.026
MP008039	7	13	7	100	16	4	0.0100	0.025
MP008040	7.5	13.1	7	100	16	4.5	0.0094	0.022
MP008041	8	15	8	100	16	4.2	0.0080	0.02
MP008042	9	16.5	10	100	16	5	0.0074	0.017
MP008043	10	18.5	9	100	16	5.3	0.0062	0.015
MP008044	11	20	11	100	16	5.5	0.0055	0.013
MP008045	13	24	13	100	16	6.9	0.0041	0.01
MP008046	14	27	13	100	16	6.9	0.0030	0.009
MP008047	15	28	20	100	16	7	0.0032	0.0092

$I_H$ =Hold current-maximum current at which the device will not trip at 23°C still air.  
 $I_T$ =Trip current-minimum current at which the device will always trip at 23°C still air.  
 $V_{MAX}$ =Maximum voltage device can withstand without damage at its rated current.  
 $I_{MAX}$ = Maximum fault current device can withstand without damage at rated voltage ( $V_{MAX}$ ).  
 $P_d$ =Typical power dissipated from device when in tripped state in 23°C still air environment.  
 $R_{MIN}$ =Minimum device resistance at 23°C.  
 $R_{1MAX}$ =Maximum device resistance at 23°C, 1 hour after tripping.

## Production Dimensions (millimeter)

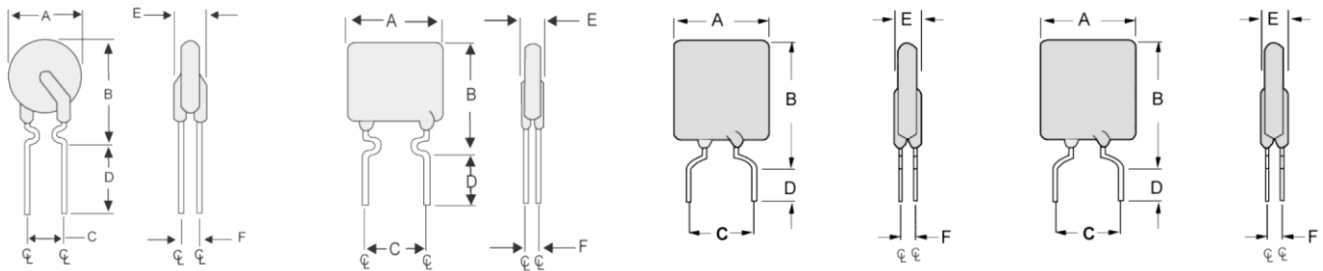

**Fig.1**  
Lead Size :24AWG  
**Φ0.51 mm Diameter**


**Fig.2**  
Lead Size :24AWG  
**Φ0.51 mm Diameter**

**Fig.3**  
Lead Size : 20AWG  
**Φ 0.81 mm Diameter**

**Fig.4**  
Lead Size : 18AWG  
**Φ 1.00 mm Diameter**


Part Number	Figure	A	B	C	D	E	F
		Maximum	Maximum	Typical	Minimum	Maximum	Typical
MP008029	1	7.4	12.7	5.1	7.6	3	1.2
MP008030	2	6.9	10.8				
MP008031	1	9.7	13.6				
MP008032		9.4	14.4				
MP008033	3	8.8	13.8				
MP008034		10	15				
MP008035		10.4	15.6				
MP008036		11.2	18.9				
MP008037		11.2	21				
MP008038		12.7	22.2				
MP008039		14	21.9				
MP008040		14	23.5				
MP008041		16.5	22.5				
MP008042		16.5	25.7				
MP008043		17.5	26.5				
MP008044		21	26.1				
MP008045	4	23.5	28.7	10.2		3.6	1.4
MP008046							
MP008047							

## Thermal Derating Curve

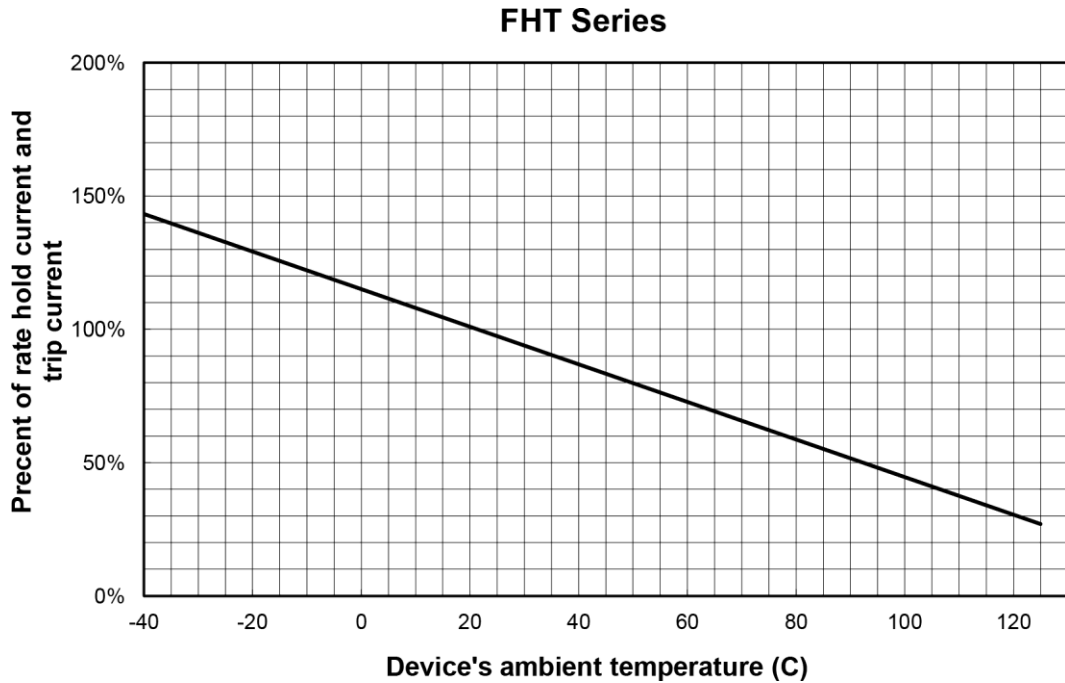

## Typical Time-To-Trip at 23°C

- A = MP008029
- B = MP008030
- C = MP008031
- D = MP008032
- E = MP008033
- F = MP008034
- G = MP008035
- H = MP008036
- I = MP008037
- J = MP008038
- K = MP008039
- L = MP008040
- M = MP008041
- N = MP008042
- O = MP008043
- P = MP008044
- Q = MP008045
- R = MP008046
- S = MP008047

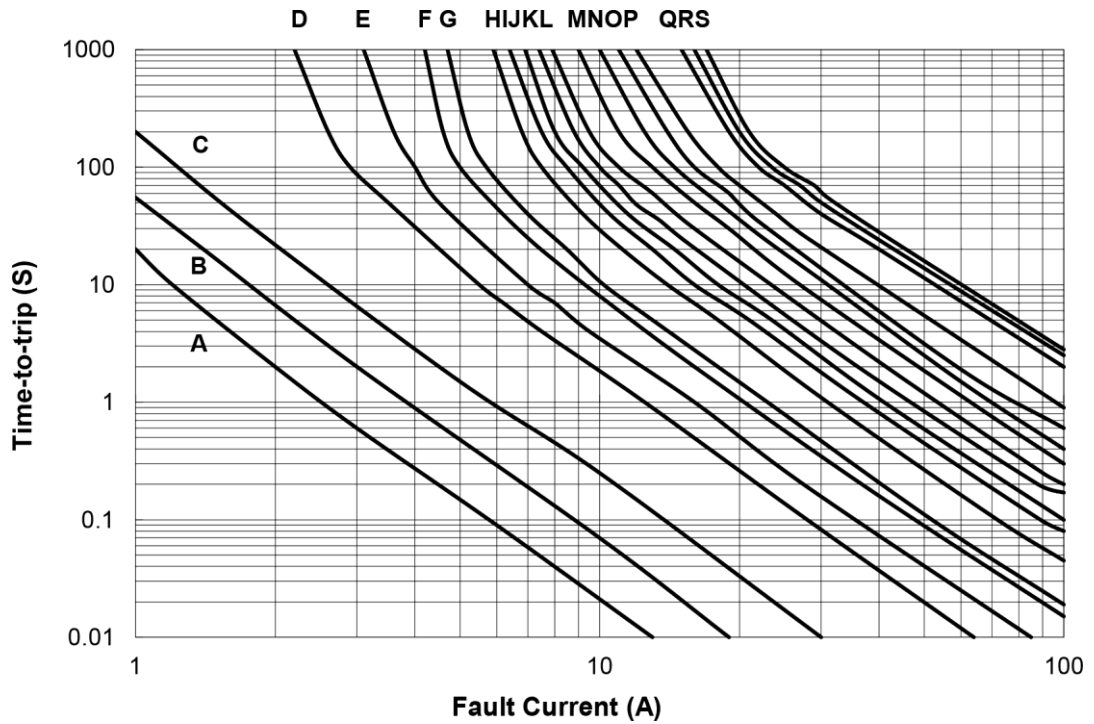

## Part Number Table

Description	Part Number
PPTC Resettable Fuse, 500mA, Radial Leaded	MP008029
PPTC Resettable Fuse, 700mA, Radial Leaded	MP008030
PPTC Resettable Fuse, 1A, Radial Leaded	MP008031
PPTC Resettable Fuse, 2A, Radial Leaded	MP008032
PPTC Resettable Fuse, 3A, Radial Leaded	MP008033
PPTC Resettable Fuse, 4A, Radial Leaded	MP008034
PPTC Resettable Fuse, 4.5A, Radial Leaded	MP008035
PPTC Resettable Fuse, 5.5A, Radial Leaded	MP008036
PPTC Resettable Fuse, 6A, Radial Leaded	MP008037
PPTC Resettable Fuse, 6.5A, Radial Leaded	MP008038
PPTC Resettable Fuse, 7A, Radial Leaded	MP008039
PPTC Resettable Fuse, 7.5A, Radial Leaded	MP008040
PPTC Resettable Fuse, 8A, Radial Leaded	MP008041
PPTC Resettable Fuse, 9A, Radial Leaded	MP008042
PPTC Resettable Fuse, 10A, Radial Leaded	MP008043
PPTC Resettable Fuse, 11A, Radial Leaded	MP008044
PPTC Resettable Fuse, 13A, Radial Leaded	MP008045
PPTC Resettable Fuse, 14A, Radial Leaded	MP008046
PPTC Resettable Fuse, 15A, Radial Leaded	MP008047

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.