

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION.


ALL RIGHTS RESERVED.

Tooling Drawing NO.



USB A: TR00662

USB B: TR00664

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		D	REVISE PER ECO-05-006320	01AUG05	TW	JH

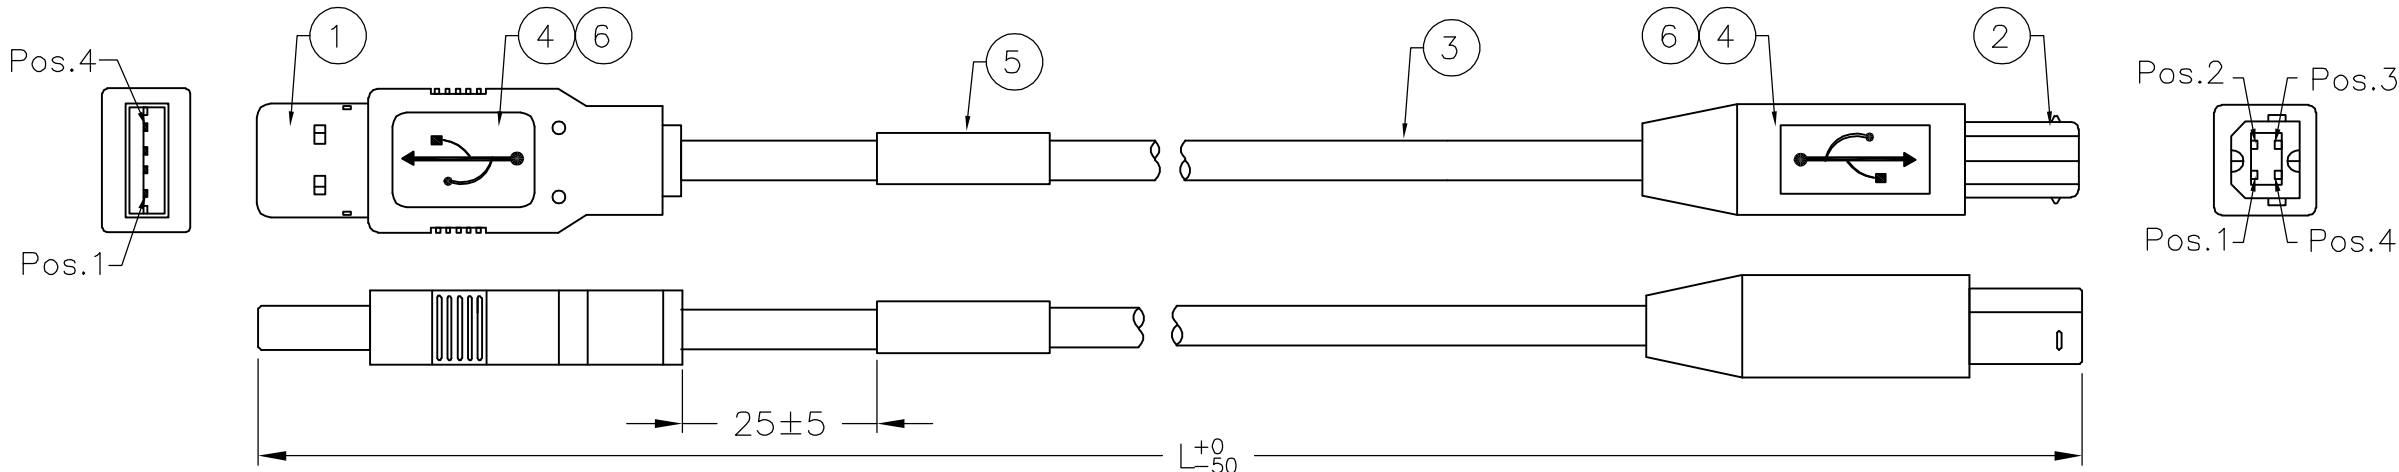

PIN ASSIGNMENT :

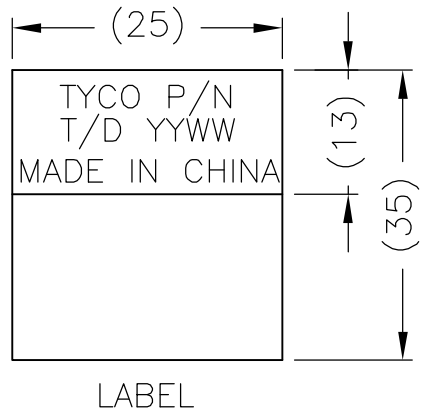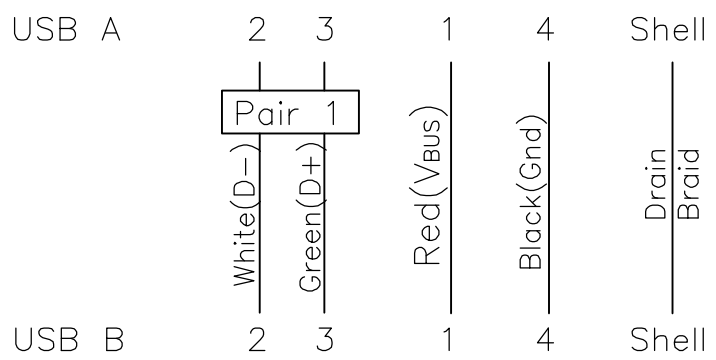

PART NO.	1487597-1	1487597-2	1487597-3
LENGTH(L)	3000	2500	3500

- NOTES:
- 1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - 2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - 3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - 4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 4300MM PER USB SPECIFICATIONS.
 - 5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

AR	AR	AR	MR	COPPER FOIL, W: 5MM	6
1	1	1	PC	LABEL, 25x35mm, White 25x13mm	5
AR	AR	AR	KG	Overmold PVC, 40P, Color: Black(BK01)	4
AR	AR	AR	MR	USB 2.0 Cable 25AWG*1P+22AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	3
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	-

MATERIAL

-

DWN BOVEY LIU 25/FEB/02

CHK -

APVD F.D. McCORKEL 15/MAR/02

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
CABLE ASSEMBLY, USB A TYPE TO USB B TYPE

SIZE A3

CAGE CODE 00779

DRAWING NO C=1487597

RESTRICTED TO -

SCALE N.T.S

SHEET 1 OF 1

REV D