


ENERGIZER EPX625G

Miniature Alkaline



Industry Standard Dimensions

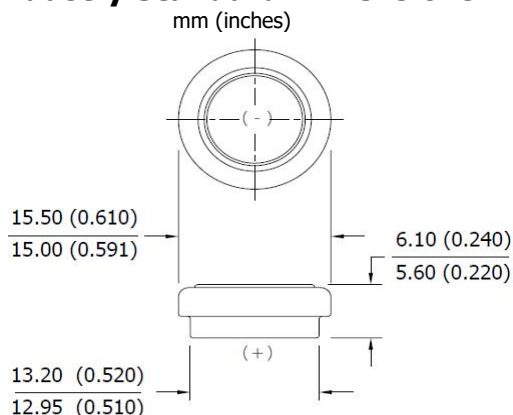


Designed specifically for photo use

Typical Discharge Characteristics

21°C (70°F)

Load: 2.5K ohms - Continuous
Typical Drain @ 1.25V: 0.5 mA

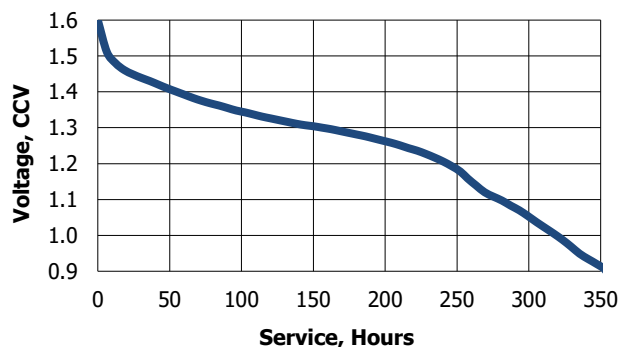


Schedule:	Typical Drains: at 1.25V (milliamperes)	Load (ohms)	Cutoff 0.9V (hours)
Continuous	0.5	2,500	355

General Information

Chemical System:	Manganese Dioxide (MnO ₂)
Designation:	N/A
Nominal Voltage:	1.5 Volts
Typical Capacity:	175 mAh (to 0.9 volts) Rated at 2.5K ohms / 21°C (70°F)
Typical Weight:	3.3 grams (0.12 ounces)
Typical Volume:	1.2 cubic centimeters (0.07 cubic inch)

Cross Section

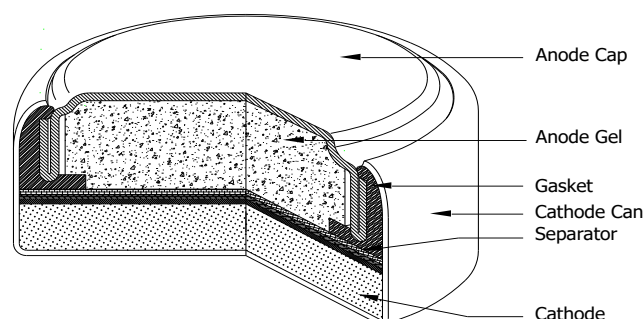

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.