


C

- ✔ **Measure Surface Temperature of Ferrous Materials**
- ✔ **Spring-Mounted Probe**
- ✔ **100 Ω Class A Din Platinum Element**
- ✔ **4-Wire Construction Standard**
- ✔ **Powerful 6 kg (13 lb) Pull Magnet**
- ✔ **Wide-Range of Leads Available**

PRMAG-2-100-A-S-1M
shown actual size.



The TA4FL, miniature connector, shown actual size. Works with RTDs—features four pins with a latch lock mechanism. Order TA4ML and TA4FL for male and female connectors respectively.

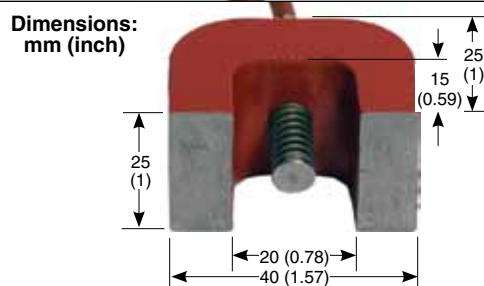

Dimensions: 25 H x 40 W x 25 mm D

To Order			
Model No.	Accuracy	Cable	Cable Length
PRMAG-2-100-A-P-1M	Class A	PVC (100°C maximum)	1 m (40")
PRMAG-2-100-A-T-1M		PFA (250°C maximum)	
PRMAG-2-100-A-G-1M		Fiberglass (400°C maximum)	
PRMAG-2-100-A-GS-1M		Fiberglass with SST braid (400°C maximum)	
PRMAG-2-100-A-PS-1M		PVC with tinned copper braid (100°C maximum)	
PRMAG-2-100-A-TS-1M		PFA with SST overbraid (200°C maximum)	
PRMAG-2-100-A-S-1M		Silicone Rubber (200°C maximum)	

Note: For cable lengths greater than 1 meter, change length in model number to required length for an additional cost per meter: add cost per meter of PVC; add cost per meter of silicone; add cost per meter PFA; add cost per meter of fiberglass; add cost per meter of SST braided fiberglass; add cost per meter of braided PVC; add cost per meter of SST braided PFA cable. To add a connector termination, add cost for "OTP", "MTP" or "TA3F" connectors.

Ordering Example: **PRMAG-2-100-A-P-1M**, magnet mount probe with Class A Pt100 element and 1 m (40') of PVC insulated wire, terminated with stripped leads.