

RF Inductor



BWLS Series



Overview

Wire-wound RF inductors are electronic components designed to store energy in a magnetic field when electrical current passes through them. They are constructed by winding a conductive wire (usually copper or gold-plated) around a core material such as air, ceramic, or ferrite.

This configuration allows them to provide high inductance values with minimal power loss, especially at high frequencies.

Benefits

1. High Q-Factor (Quality Factor)
2. Ceramic body and wire wound construction provide high SRFs
3. Low DC resistance design
4. High Current Handling
5. Low inductance value

Applications

1. Industrial and Medical Equipmen: RFID systems and medical imaging equipment.
2. Data Centers
3. Networking
4. Base Station
5. Consumer Electronics
6. Security system

Product Information


| Series | Size Code (JIS/EIA) | Inductance (nH) |
|--------|---------------------|-----------------|
| BWLS | 0603/0201 | 0.0047 ~ 560 |
| | 1005/0402 | |
| | 1608/0603 | |
| | 2012/0805 | |
| | 2520/1008 | |



BWLS00161109 Series Specification

1 Scope: This specification applies to Wire Wound Ferrite Chip Inductors

2 Part numbering:

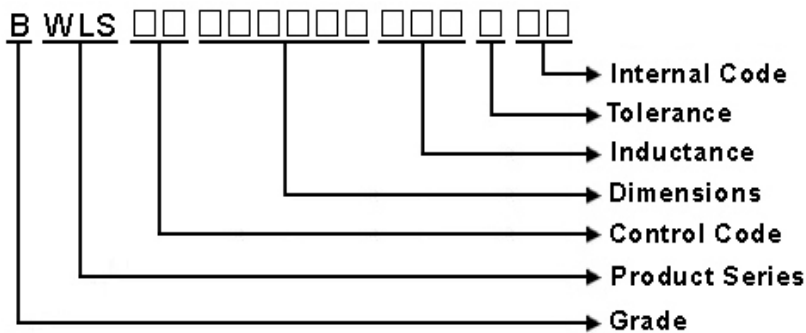


3 Rating:

Operating Temperature: - 40°C ~ 105°C
(Including self - temperature rise)

Storage Temperature: - 40°C ~ 105°C
(The storage temperature range is for after the assembly)

4 Marking:




Marking: 1st → BLK

5 Standard Testing Condition

| | Unless otherwise specified | In case of doubt |
|-------------|----------------------------------|------------------|
| Temperature | Ordinary Temperature(15 to 35°C) | 20 to 30°C |
| Humidity | Ordinary Humidity(25 to 85% RH) | 50 to 80 %RH |

BWLS00161109 Series Specification

6 Configuration and Dimensions and Unit Weight:

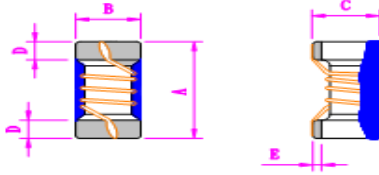

Dimensions in mm

| TYPE | A | B | C | D |
|--------|-------------------------------------|---------|-------------------------------------|------|
| 161109 | 1.6 ^{+0.2} _{-0.1} | 1.1±0.1 | 0.9 ^{+0.2} _{-0.1} | 0.38 |

Net Weight (grams)

| SIZE CODE | Net Weight (grams) |
|-----------|--------------------|
| 161109 | 0.005 (typ.) |

7 Electrical Characteristics:

| Part No. | Inductance (μ H) | L/Q Test | | Q Typ. | SRF (MHz)Min. | RDC (Ω)Max. | IDC (mA) | Tolerance (\pm %) | Color Code 1st |
|--------------------|--------------------------|----------------|--|-----------|------------------|-------------------------|-------------|-------------------------|-------------------|
| | | Freq. (MHz) | | | | | | | |
| BWLS0016110947N□00 | 0.047 | 7.9/7.9 | | 17 | 1700 | 0.075 | 1500 | 5,10 | BLK |
| BWLS0016110972N□00 | 0.072 | 7.9/7.9 | | 17 | 1700 | 0.12 | 1500 | 5,10 | BRN |
| BWLS00161109R10□00 | 0.1 | 7.9/7.9 | | 17 | 1650 | 0.13 | 1500 | 5,10 | RED |
| BWLS00161109R12□00 | 0.12 | 7.9/7.9 | | 17 | 1350 | 0.15 | 1500 | 5,10 | ORN |
| BWLS00161109R15□00 | 0.15 | 7.9/7.9 | | 17 | 1350 | 0.15 | 1450 | 5,10 | YEL |
| BWLS00161109R18□00 | 0.18 | 7.9/7.9 | | 17 | 1150 | 0.15 | 1400 | 5,10 | GRN |
| BWLS00161109R22□00 | 0.22 | 7.9/7.9 | | 17 | 1050 | 0.16 | 1350 | 5,10 | BLU |
| BWLS00161109R24□00 | 0.24 | 7.9/7.9 | | 17 | 1050 | 0.19 | 1300 | 5,10 | VIO |
| BWLS00161109R27□00 | 0.27 | 7.9/7.9 | | 17 | 1050 | 0.3 | 1050 | 5,10 | GRY |
| BWLS00161109R33□00 | 0.33 | 7.9/7.9 | | 17 | 850 | 0.46 | 1200 | 5,10 | WHT |
| BWLS00161109R39□00 | 0.39 | 7.9/7.9 | | 17 | 810 | 0.51 | 1200 | 5,10 | BLK |
| BWLS00161109R47□00 | 0.47 | 7.9/7.9 | | 17 | 720 | 0.62 | 1050 | 5,10 | BRN |
| BWLS00161109R56□00 | 0.56 | 7.9/7.9 | | 17 | 600 | 0.44 | 850 | 5,10 | RED |
| BWLS00161109R68□00 | 0.68 | 7.9/7.9 | | 17 | 600 | 0.52 | 850 | 5,10 | ORN |
| BWLS00161109R78□00 | 0.78 | 7.9/7.9 | | 17 | 460 | 0.83 | 850 | 5,10 | YEL |
| BWLS00161109R82□00 | 0.82 | 7.9/7.9 | | 17 | 480 | 0.69 | 750 | 5,10 | GRN |
| BWLS00161109R91□00 | 0.91 | 7.9/7.9 | | 17 | 330 | 0.76 | 670 | 5,10 | BLK |
| BWLS001611091R0□00 | 1 | 7.9/7.9 | | 18 | 310 | 0.81 | 600 | 5,10 | BLU |
| BWLS001611091R2□00 | 1.2 | 7.9/7.9 | | 17 | 270 | 0.87 | 550 | 5,10 | VIO |
| BWLS001611091R5□00 | 1.5 | 7.9/7.9 | | 17 | 270 | 1.06 | 540 | 5,10 | GRY |
| BWLS001611091R8□00 | 1.8 | 7.9/7.9 | | 17 | 230 | 1.1 | 520 | 5,10 | WHT |
| BWLS001611092R2□00 | 2.2 | 7.9/7.9 | | 17 | 140 | 1.2 | 500 | 5,10 | BLK |
| BWLS001611092R7□00 | 2.7 | 7.9/7.9 | | 17 | 105 | 1.5 | 480 | 5,10 | BRN |
| BWLS001611093R3□00 | 3.3 | 7.9/7.9 | | 17 | 84 | 1.5 | 440 | 5,10 | RED |
| BWLS001611093R9□00 | 3.9 | 7.9/7.9 | | 17 | 80 | 1.6 | 430 | 5,10 | ORN |

NOTE: □-tolerance J=±5% / K=±10%

1. Operating temperature range $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$ (Including self - temperature rise)
2. L/Q Test OSC @200mV.
3. IDC for Inductance drop 10% from its value without current.

BWLS00161109 Series Specification

| Part No. | Inductance (uH) | L/Q Test Freq. (MHz) | Q Typ. | SRF (MHz)Min. | RDC (Ω)Max. | IDC (mA) | Tolerance (±%) | Color Code 1st |
|--------------------|--------------------|----------------------------|-----------|------------------|----------------|-------------|-------------------|-------------------|
| BWLS001611094R7□00 | 4.7 | 7.9/7.9 | 18 | 69 | 2.1 | 420 | 5,10 | YEL |
| BWLS001611095R6□00 | 5.6 | 7.9/7.9 | 18 | 65 | 2.6 | 400 | 5,10 | GRN |
| BWLS001611096R8□00 | 6.8 | 7.9/7.9 | 19 | 55 | 3.1 | 400 | 5,10 | BLU |
| BWLS001611097R8□00 | 7.8 | 7.9/7.9 | 17 | 47 | 3.5 | 400 | 5,10 | VIO |
| BWLS001611098R2□00 | 8.2 | 7.9/7.9 | 17 | 42 | 3.8 | 400 | 5,10 | GRY |
| BWLS00161109100□00 | 10 | 7.9/7.9 | 19 | 40 | 4.8 | 300 | 5,10 | WHT |

NOTE: □-tolerance J=±5% / K=±10%

1. Operating temperature range -40°C ~ 105°C (Including self - temperature rise)


2. L/Q Test OSC @200mV.

3. IDC for Inductance drop 10% from its value without current.

BWLS00161109 Series Specification

8 BWLS00161109 Series

8.1 Construction:

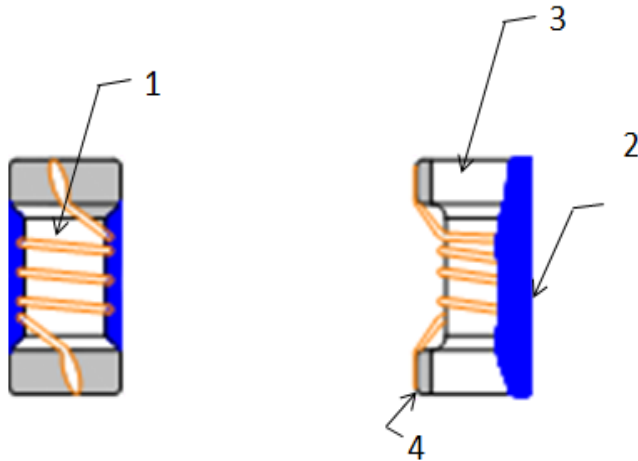

8.2 Material List:

| NO | PART | MATERIAL |
|----|----------|--------------|
| 1 | WIRE | Grade 180 |
| 2 | EPOXY | UV GLUE |
| 3 | CORE | FERRITE CORE |
| 4 | TERMINAL | Ag/Cu/Ni/Sn |

BWLS00161109 Series Specification

9 Reliability Of Ferrite Wire Wound Chip Inductor/FERRITE SERIES


1-1.Environmental Performance

| No | Item | Specification | Test Method | | |
|-------|-----------------------------|---|--|------------------------------------|------------|
| 1-1-1 | Temperature Cycle | Appearance: No Damage Inductance: within $\pm 10\%$ of initial value Q change: within $\pm 30\%$ of initial value | One cycle: | | |
| | | | Step | Temperature ($^{\circ}\text{C}$) | Time (min) |
| | | | 1 | -40 \pm 3 | 30 |
| | | | 2 | 25 \pm 2 | 3 |
| | | | 3 | 105 \pm 3 | 30 |
| 4 | 25 \pm 2 | 3 | | | |
| | | | Total: 5 cycles Measured After Exposure in The Room Condition For 1hrs | | |
| 1-1-2 | High Temperature Resistance | | Temperature: 85 \pm 3 $^{\circ}\text{C}$ Time: 1000Hrs Measured After Exposure In The Room Condition For 1Hrs | | |
| 1-1-3 | Low Temperature Resistance | | Temperature: -25 \pm 3 $^{\circ}\text{C}$ Time: 1000Hrs Measured After Exposure In The Room Condition For 1Hrs | | |
| 1-1-4 | Humidity Load Life | There should be no evidence of short or open circle | Temperature: 40 \pm 2 $^{\circ}\text{C}$ Relative Humidity: 90~95% Load: Allowed DC Current Time: 96Hrs | | |

1-2.Mechanical Performance

| No | Item | Specification | Test Method |
|-------|--------------------------------|---|--|
| 1-2-1 | Resistance TO Soldering Heat | Appearance: No Damage | 1. The device should be reflow soldered on PCB (peak 260 $^{\circ}\text{C}$ \pm 5 $^{\circ}\text{C}$ for 10 seconds) 2. Solder Composition: Sn/Ag3.0/Cu0.5 3. Test time: 6 minutes |
| 1-2-2 | Solder ability | The Electrodes Shall Be At Least 95% Covered With New Solder Coating | 1. Pre-Heating: 150 $^{\circ}\text{C}$, 1min. 2. Solder Composition: Sn/Ag3.0/Cu0.5 3. Solder Temperature: 245 \pm 5 $^{\circ}\text{C}$. 4. Immersion Time: 4 \pm 1 sec. |
| 1-2-3 | Component Adhesion (Push Test) | 1 Lbs. For 0402 1 Lbs. For 0603 2 Lbs. For 201614 2 Lbs. For 0805 4 Lbs. For The Rest | The device should be reflow soldered (245 \pm 5 $^{\circ}\text{C}$ For 10 seconds) to a tinned copper substrate. A force gauge should be applied to the side of the component. The device must withstand a minimum force of 1or2or4 pounds without a failure of the termination attached to component |

BWLS00161109 Series Specification

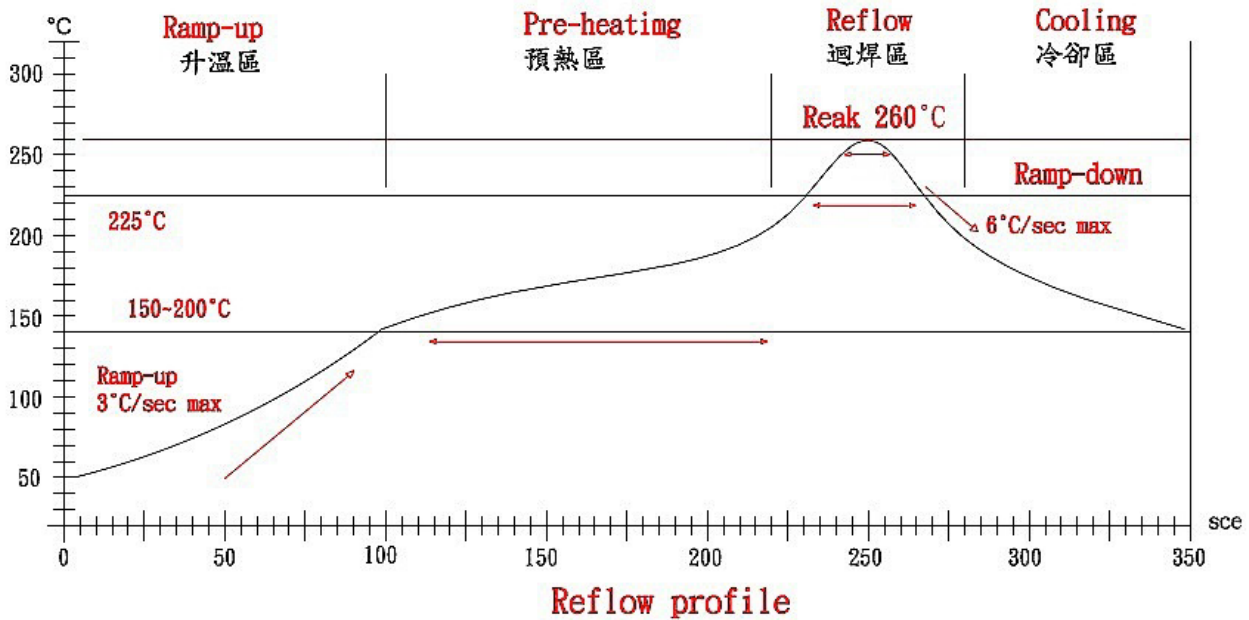

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C

| 管制項目 Item. | 升温區 Ramp-up | 預熱區 Pre-heating | 迴焊區 Reflow | Peak Temp | 冷卻區 Cooling |
|---------------------|----------------|--------------------|---------------|-------------|------------------|
| 溫度範圍 Temp.scope | R.T ~ 150°C | 150°C ~ 200°C | Above 217°C | 260±5°C | Peak Temp.~150°C |
| 標準時間 Time spec. | - | 60 ~ 180 sec | 60 ~ 150 sec | 20 ~ 40 sec | - |
| 實際時間 Time result | - | 75 ~ 100 sec | 90 ~ 120 sec | 20 ~ 35 sec | - |

NOTE:


- 1.Re-flow possible times : within 3 times
- 2.Nitrogen adopted is recommends while in re-flow
- 3.Products can only be soldered with reflow

BWLS00161109 Series Specification

10 Packaging:

10.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

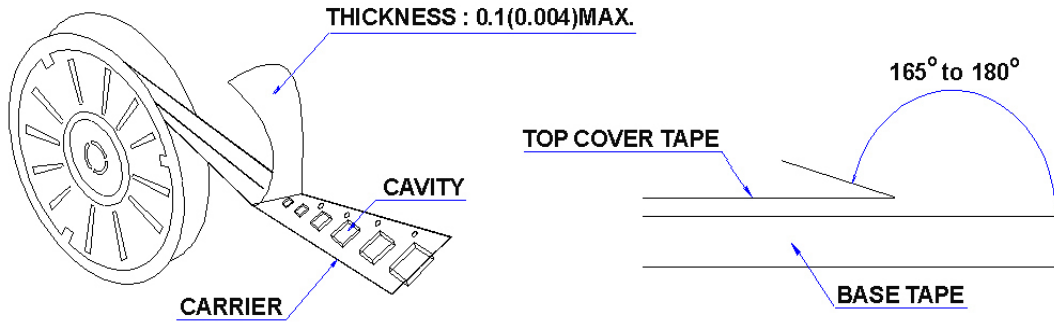

10.2 Packaging Quantity

| TYPE | PCS/REEL |
|--------|----------|
| 161109 | 4000 |

10.3 Reel Dimensions

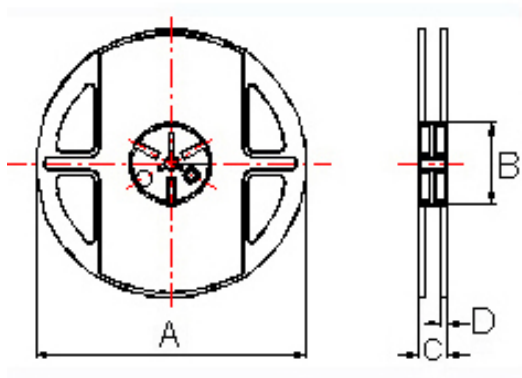


Dimensions in mm

| TYPE | A | B | C | D |
|--------|-------|--------|--------|---------|
| 161109 | 178±1 | 60±0.5 | 12±0.5 | 1.5±0.5 |

BWLS00161109 Series Specification


10 Packaging:

10.4 Tape Dimensions in mm

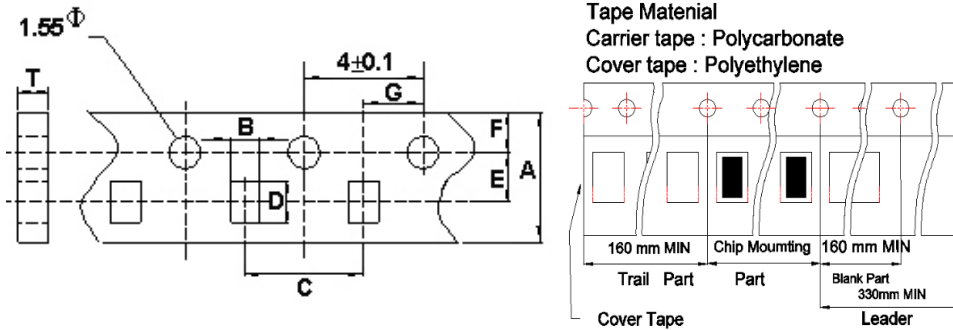

| TYPE | A | B | C | D | E | F | G | T |
|--------|-----|------|---|-----|-----|------|---|------|
| 161109 | 8.0 | 1.25 | 4 | 1.9 | 3.5 | 1.75 | 2 | 1.05 |

11 Recommended Land Pattern:



Dimensions in mm









| TYPE | H(In/mm) | I(In/mm) | J(In/mm) |
|--------|-----------|------------|------------|
| 161109 | 0.04/1.02 | 0.025/0.64 | 0.025/0.64 |

12 Note:









- Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- Do not knock nor drop.
- All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
- The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less).
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- The moisture sensitivity level (MSL) of products is classified as level 1.

BWLS00161109 Series Specification









13 Graph:

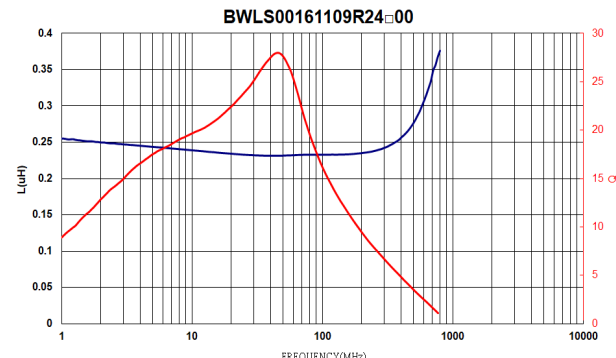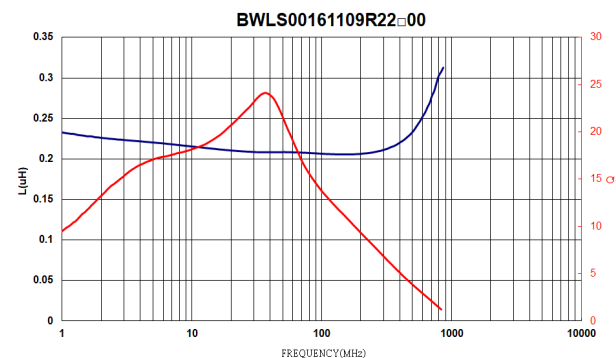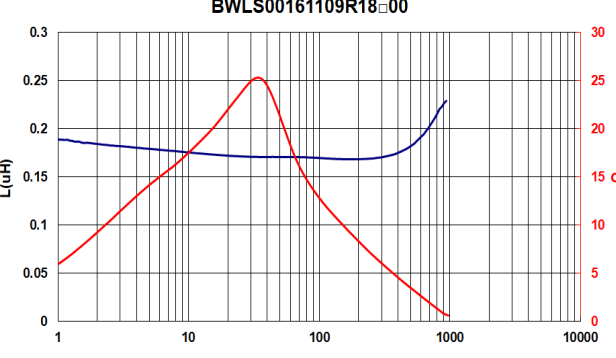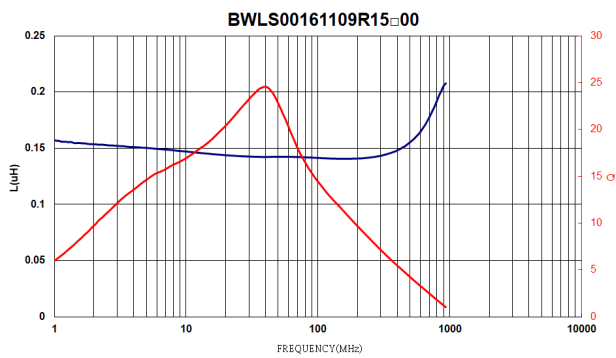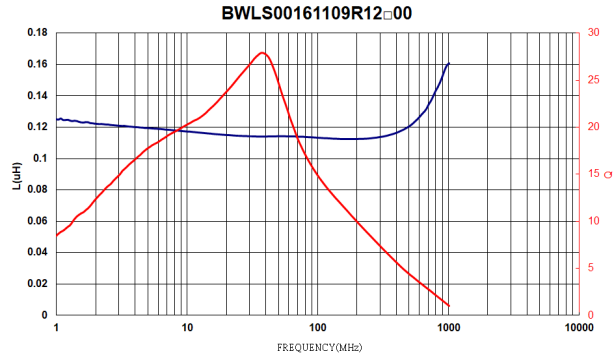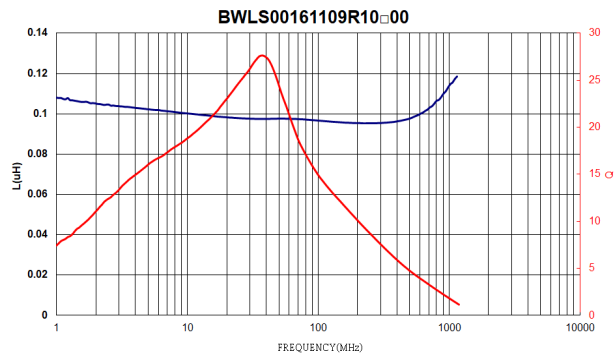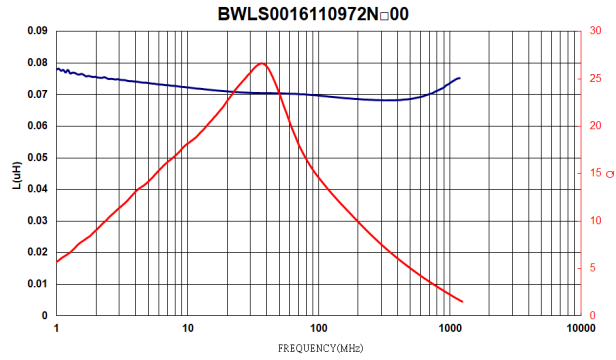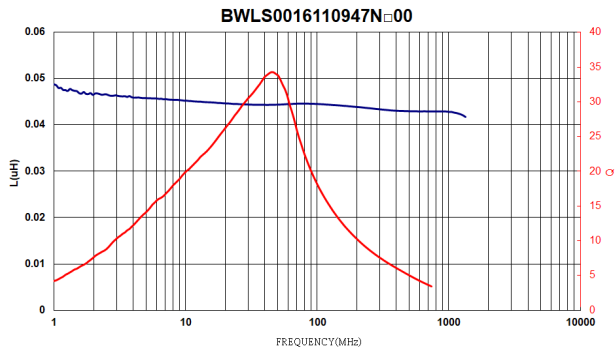

BWLS00161109 Series Specification

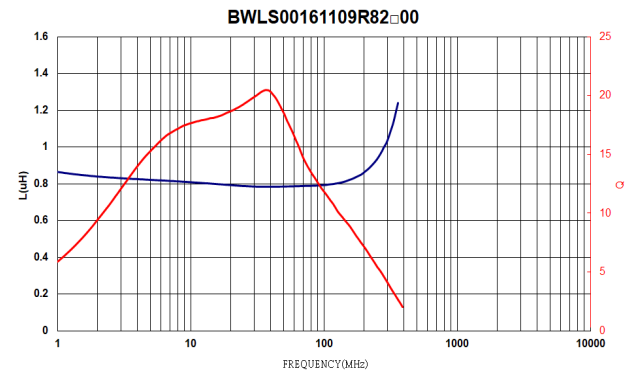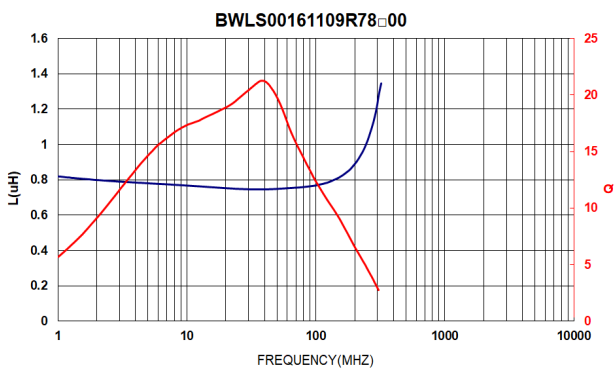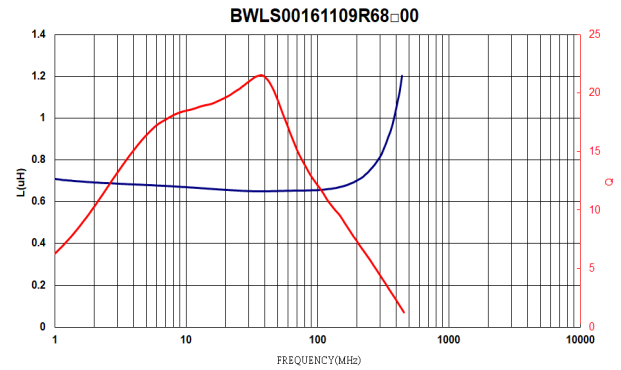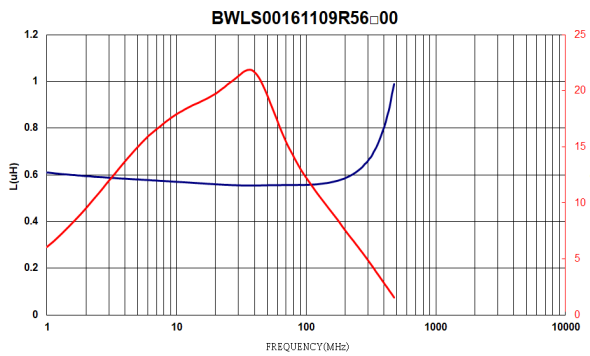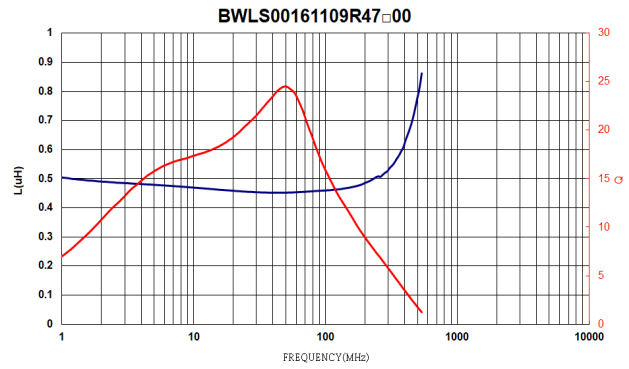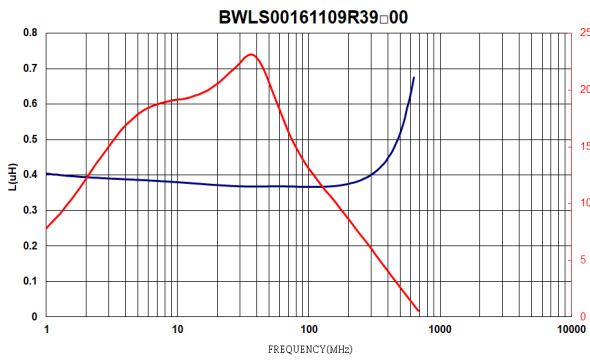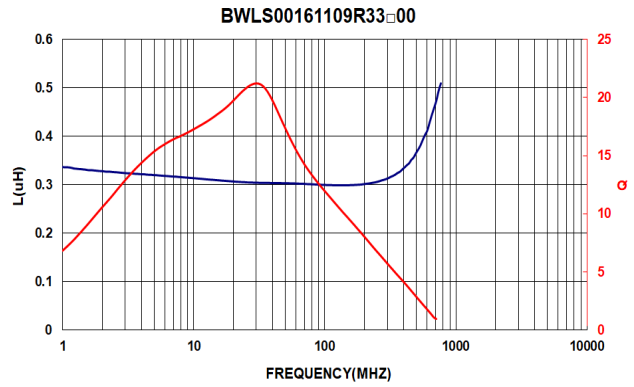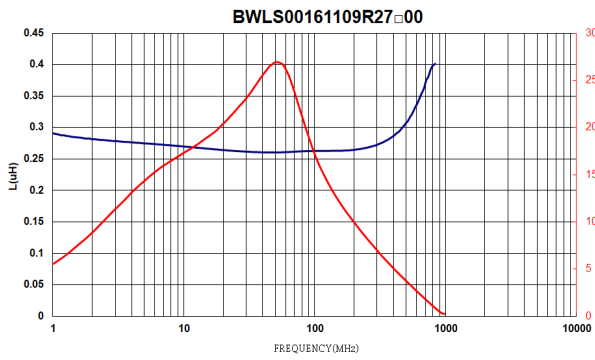

BWLS00161109 Series Specification

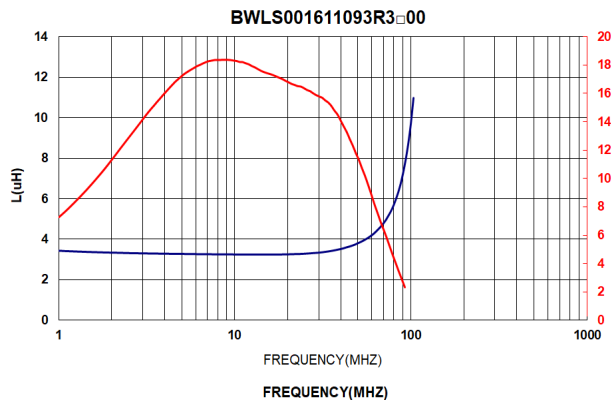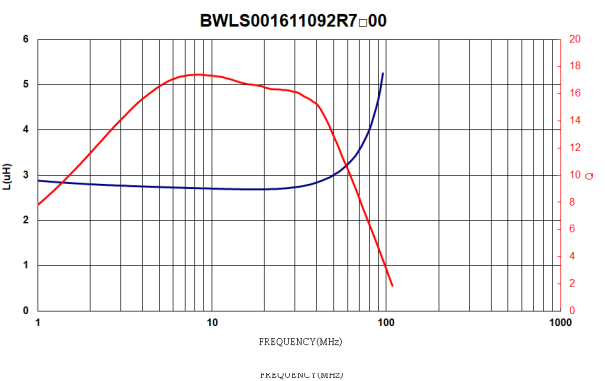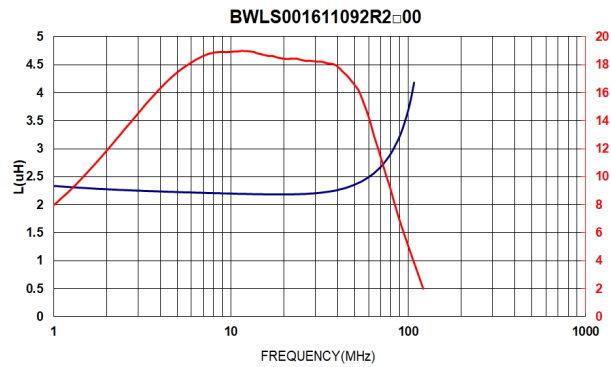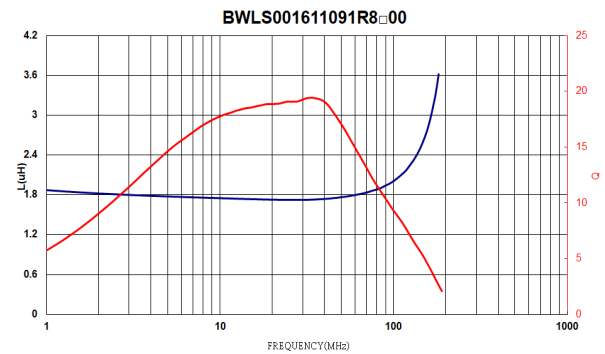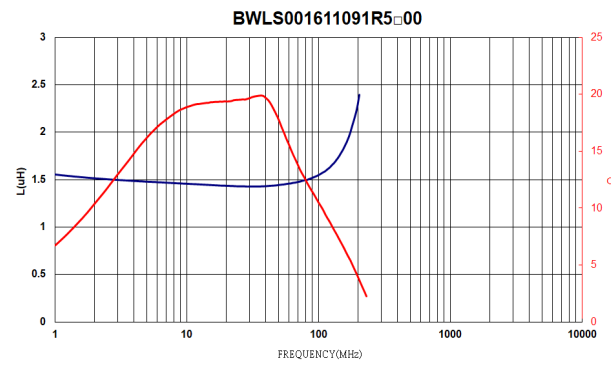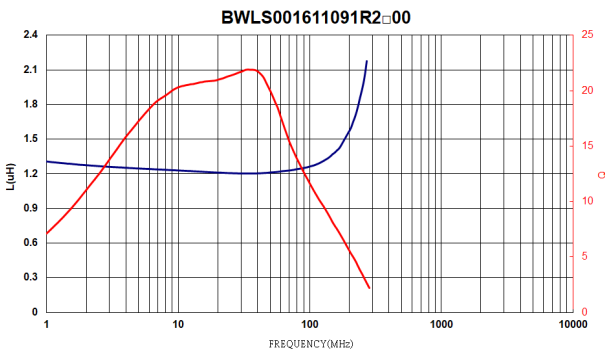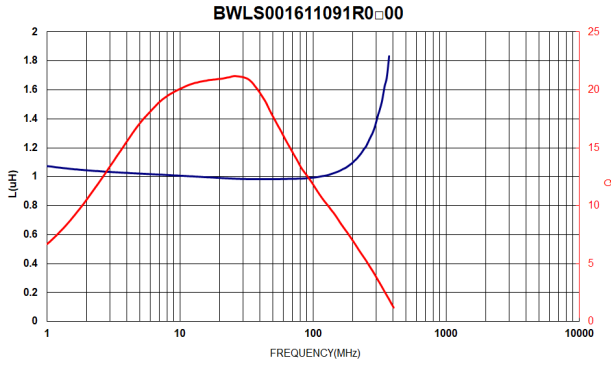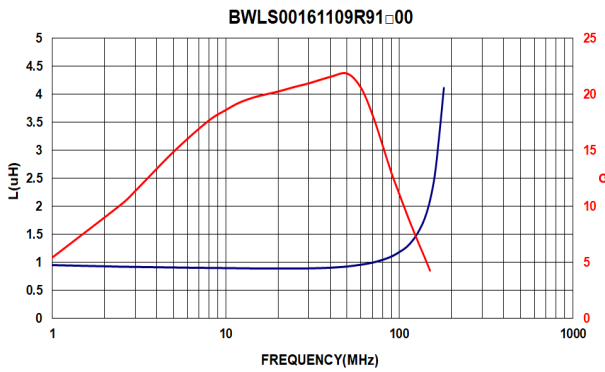

BWLS00161109 Series Specification

