
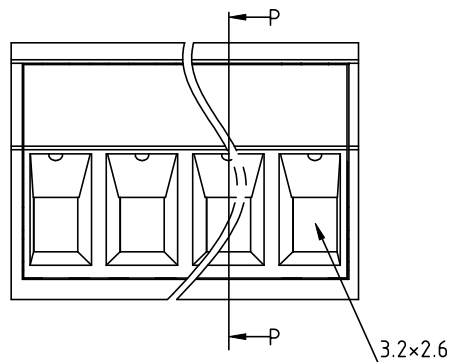
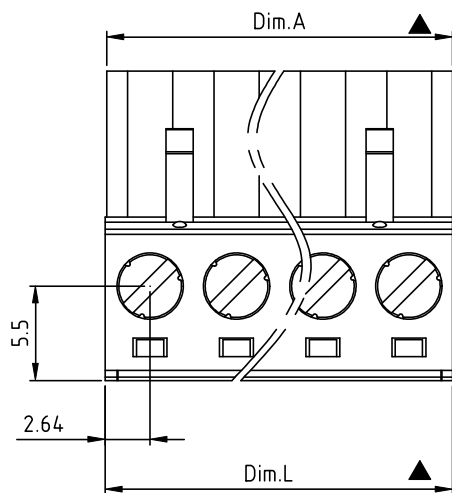


RoHS Compliant


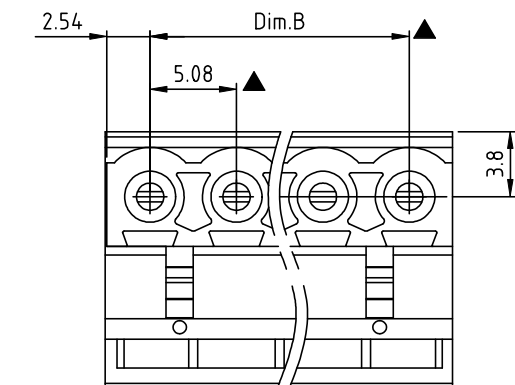


DIMENSION

DIM L	N×5.08±0.1
DIM A	N×5.08
DIM B	(N-1)×5.08

N=Number of poles

Poles	Tolerance	
	DIM B	DIM L&DIM A
2p	±0.10	±0.20
3p-6p	±0.15	±0.20
7p-12p	±0.20	±0.25
13p-18p	±0.25	±0.30
19p-24p	±0.30	±0.40

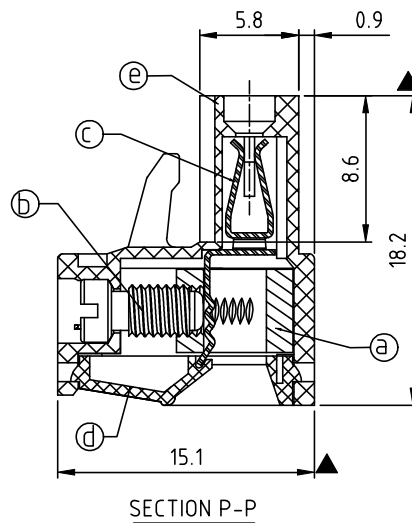

SECTION P-P

REV	DATE	ECN NO.	APPROVER
I	04/12-21	ECN202104004	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "--" slot type
- Item ③ Female contact: PhBz, Bright Tin plated over Nickel plated
- Item ④ Terminal Cover: Thermoplastic (UL94V-0)
- Item ⑤ Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 12A/20A/20A
- Wire range: 2.5mm²/0.34-2.5mm²
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE TUV
- Use with 0Q1.0×1.0mm square pin, Withdrawal force: 200 - 500gf /pole
- Critical dimension: ▲

TJ xx 51x 3 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

000 0 Standard @ Logo
000 A Standard ANY Logo
0091 Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ-5.08 mm Series (Without flange) 2-24P			
PART NO.	TJxx51x3xxxxG			DWG NO.	8TJ0007
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 04/12-21	Chen Bo 04/12-21		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
SHEET: 01/01		REV.: I			