


11

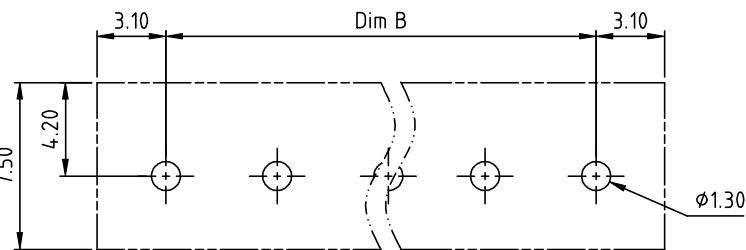

N = Number of poles
Dim A=Nx5.0
Dim B=(N-1)x5.0

13

△₂ Electrical UL/CSA/VDE △₁₂

- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV/15KV/2KV
- Operating temperature: -40°C to +115°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- SAFETY APPROVAL DATA:      
- Critical dimension: 

△₄ TC xx 0 3 x x xxxx G △₁

	COLOR
0	Black (RAL9005)
2	Red (RAL3001/D)
3	Orange(RAL2011/P)
4	Yellow(RAL1018/A)
5	Green(RAL6018/T)
6	Blue (RAL5015/A)
8	Grey(RAL7035/D)
9	White(RAL1102)
C	Green(RAL 6018/U)

— DIM C Length

0	4.4mm	000 V Standard @ logo
1	3.8mm	000 A Standard ANY logo
2	3.5mm	Any special item by
3	2.9mm	customer request,
		please contact sales
		department.

RoHS compliant
(lead<4%)
In copper Alloy

11

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

A