

MEMS Flow Sensors

## D6F

Series Catalog

### Faster and more accurate than ever before


MEMS flow sensor : the ideal means for mass flow measurement

Omron flow sensor  
so precise  
even the flap of a butterfly's  
wings will not be missed.



# Realizing a highly accurate flow measurement,

Omron's MEMS flow sensor accurately detects minute airflow so much as a single flap of a butterfly's wings. A gas flow sensor is capable of "measuring mass flow" independent of temperature and pressure.

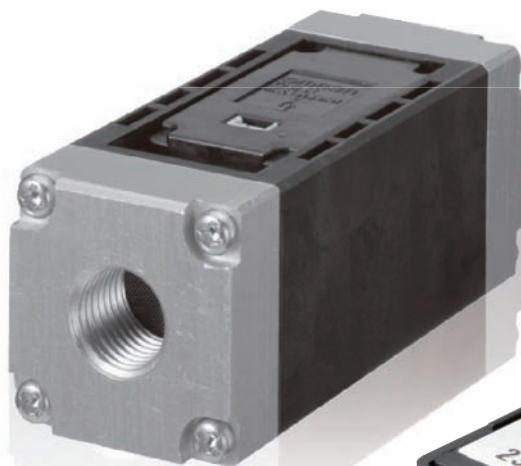

D6F-A6




D6F-W



## Q&A on Mass Flow Measurement

- Q1** There are two balloons; each having different volumes. But these balloons have the same mass. Why is that?
- A** The volume increases/decreases according to the pressure and temperature changes. The mass, on the other hand, remains constant regardless of the environmental changes. The mass flow measurement allows measurement performance that is not affected by changes in the environment.
- Q2** Why is mass flow measurement required?
- A** An accurate measurement of the flow is required especially for combustion control. Omron's flow sensor enables measuring the gas flow based on the mass flow measurement.

## Principles of MEMS Flow D6F Series

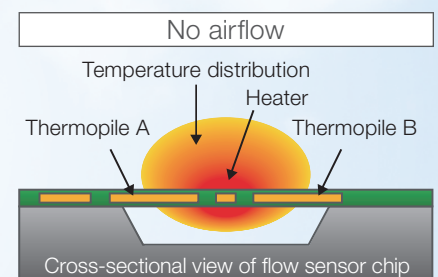


During the absence of airflow, the temperature distribution around the heater is symmetrical. When there is airflow, the temperature of the upwind side cools down and the temperature of the downwind side warms up, disrupting the symmetry of the temperature distribution.

# sensing even a single flap of a butterfly's wings

## High Accuracy

**$\pm 3\%RD$  (25-100%F.S.) is realized by linear temperature correction using ASIC technology**


Ambient temperature = 25degC (Model: D6F-20A7D-000-0)

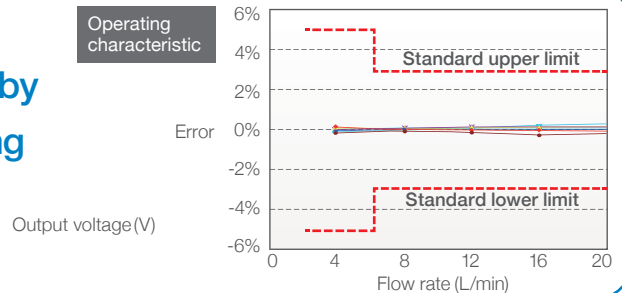

## High Sensitivity

**Omron's unique MEMS technology allows detection of very low air velocities**

Flow rate of 1L: Output corresponding to flow rate change below 1/1000 of full scale.

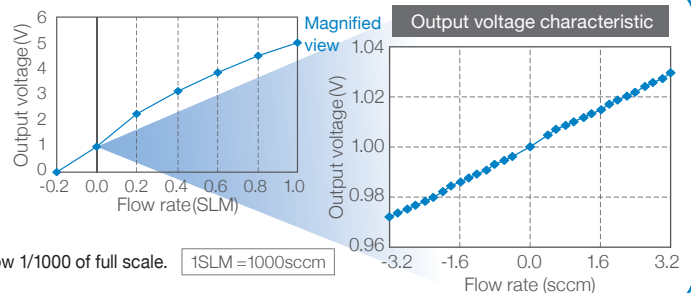


## Compact

**The product size is reduced by using the world-smallest class size MEMS sensor element**

Dimension of D6F-V model: 24x8x14mm.



## Sensor Measurement

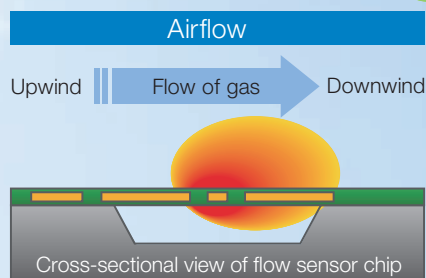



By detecting this temperature difference appearing as a difference in the electromotive forces developed by the thermopiles, it allows the mass flow rate and mass flow velocity to be measured without the influence of temperature and pressure. Since the thermopile generates the thermo-electromotive force, the power consumption is much lower than when using the resistivity method.

## Highly Resistant to Dust

**Built-in Dust Segregation System (cyclonic) D6F-W/-V/-P**

Patent No.4534526

The sensor can be placed anywhere thanks to its dust-resistant structure. Omron's unique design of 3D flow path provides a high level of reliability by separating dust particles to reduce its effect on the sensor chip. Additionally, Omron succeeded in reducing the sensor size, allowing it to be used in wider range of applications.

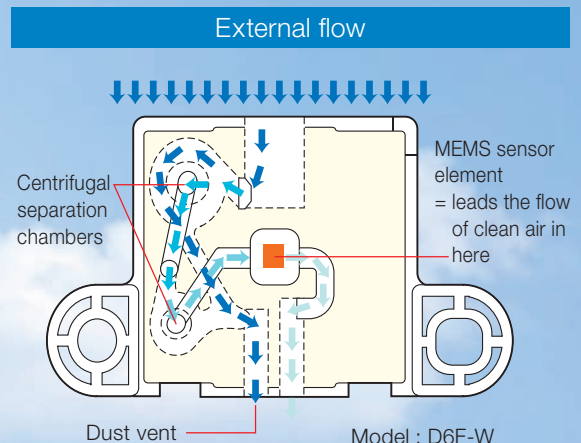

# Applications

Omron flow sensors cover a wide range of applications and can be used for different purposes.

## Application Examples

### Combustion

For optimal control of the amount of gas by measuring the mass flow rate

- ▶ Flow rate
- ▶ Differential pressure



Fuel cell



Boiler



Welder

Optimizing combustion efficiency


### HVAC

For feedback control of air conditioning by measuring the amount of air and amount of ventilation


- ▶ Velocity
- ▶ Differential pressure



Ventilation system



VAV (central air conditioning)



Fans

Controlling the amount of air at the required level and monitoring the amount of ventilation

### Measurement

For optimal control of pumps by measuring the flow rate  
For management of positive pressure and negative pressure by measuring the differential pressure

- ▶ Flow rate
- ▶ Differential pressure



Gas detector



Gas analyzer



Low differential pressure transmission

Accurately detecting gas concentrations  
Monitoring the positive/negative pressure in a room

### Clogging Detection

For monitoring the flow of the cooling air to optimize the cooling efficiency and avoid malfunctions.

- ▶ Flow rate
- ▶ Velocity
- ▶ Differential pressure



Projector



Industrial air conditioner



Server


Quiet, low maintenance cost




# Selection of Products

Select the most suitable sensor from many variations.

## ► Flow Rate

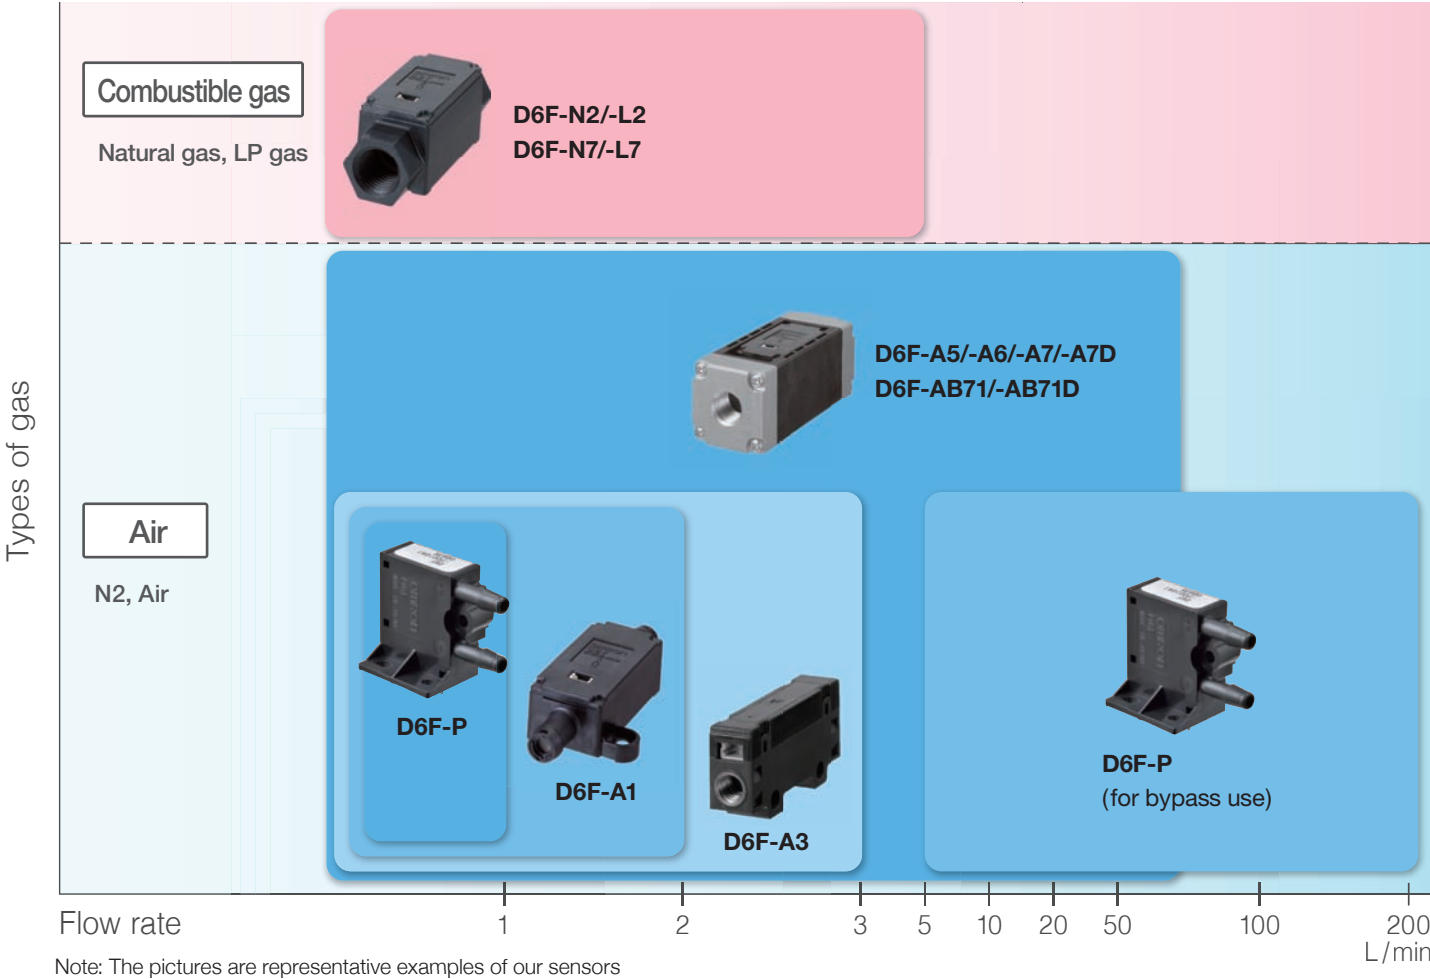

## ► Flow Velocity

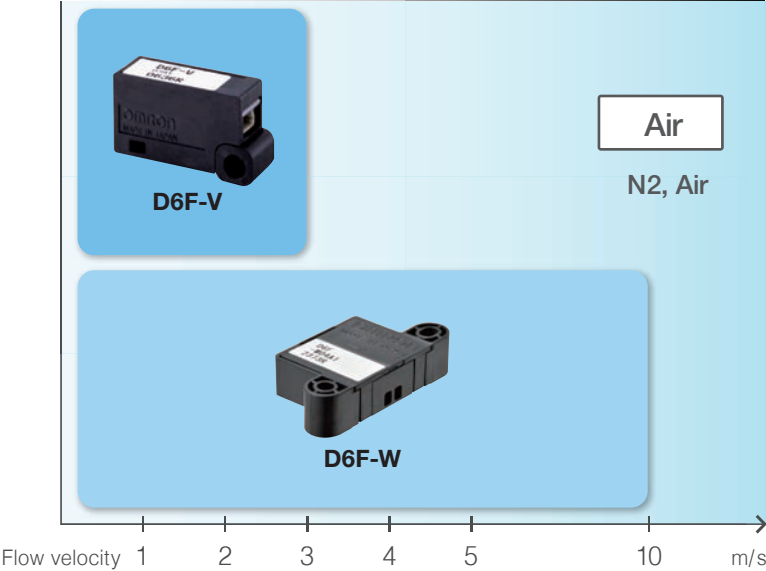

## ► Differential Pressure

Delivers high sensitivity even at low flow rate, low differential pressure

**MEMS differential pressure sensor**

High precision

Accurate measurement

Low piping effects

High impedance to reduce the influence of piping variations

High reliability

Detect sensor anomaly

D6F-PH

The D6F-PH sensor is a small, black, rectangular device with two ports on one side and a connector on the other.

# List of D6F series

## MEMS Flow Sensor

 Air  Minute flow  Analog

| Applicable gas             |       | Air                                                                               |                                                                                   |                                                                                     |                                                                                     |
|----------------------------|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Items                      | Model | D6F-P0001A1                                                                       | D6F-01A1-110<br>D6F-P0010A□<br>D6F-P0010AM2                                       | D6F-02A1-110                                                                        | D6F-03A3-000                                                                        |
| Shape                      |       |  |  |  |  |
| Flow rate range<br>(L/min) | 5     |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|                            | 4     |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|                            | 3     |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|                            | 2     |                                                                                   |                                                                                   | 0~2L/min                                                                            | 0~3L/min                                                                            |
|                            | 1     | 0~0.1L/min                                                                        | 0~1L/min                                                                          |                                                                                     |                                                                                     |
|                            | 0     |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Page                       |       | 25                                                                                | 8, 25                                                                             | 8                                                                                   | 12                                                                                  |

 Gas  Minute to middle flow  Analog

| Applicable gas             |       | Natural gas (13A)                                                                   | LP gas                                                                               | Natural gas (13A)                                                                     |
|----------------------------|-------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Items                      | Model | D6F-01N2-000                                                                        | D6F-02L2-000<br>D6F-02L7-000                                                         | D6F-05N2-000<br>D6F-05N7-000                                                          |
| Shape                      |       |  |  |  |
| Flow rate range<br>(L/min) | 5     |                                                                                     |                                                                                      | 0~5L/min                                                                              |
|                            | 4     |                                                                                     |                                                                                      |                                                                                       |
|                            | 3     |                                                                                     |                                                                                      |                                                                                       |
|                            | 2     |                                                                                     | 0~2L/min                                                                             |                                                                                       |
|                            | 1     | 0~1L/min                                                                            |                                                                                      |                                                                                       |
|                            | 0     |                                                                                     |                                                                                      |                                                                                       |
| Page                       |       | 10                                                                                  | 10, 18                                                                               | 10, 16, 18                                                                            |

 Air  Middle to high flow  Analog  Digital  Digital type only

| Applicable gas             |       | Air                                                                                                                                               |                                                                                                                                   |                                                                                      |                                                                                                                                   |                                                                                                                         |
|----------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Items                      | Model | D6F-10A5-000<br>D6F-10A6-000<br>D6F-10A7-000<br>D6F-10A7D-000  | D6F-20A5-000<br>D6F-20A6-000<br>D6F-20A7D-000  | D6F-30A7-000<br>D6F-30AB71-000                                                       | D6F-50A5-000<br>D6F-50A6-000<br>D6F-50A7D-000  | D6F-70AB71-000<br>D6F-70AB71D-000  |
| Shape                      |       |                                                                |                                                |  |                                              |                                    |
| Flow rate range<br>(L/min) | 70    |                                                                                                                                                   |                                                                                                                                   |                                                                                      |                                                                                                                                   | 0~70L/min                                                                                                               |
|                            | 60    |                                                                                                                                                   |                                                                                                                                   |                                                                                      |                                                                                                                                   |                                                                                                                         |
|                            | 50    |                                                                                                                                                   |                                                                                                                                   |                                                                                      | 0~50L/min                                                                                                                         |                                                                                                                         |
|                            | 40    |                                                                                                                                                   |                                                                                                                                   | 0~30L/min                                                                            |                                                                                                                                   |                                                                                                                         |
|                            | 30    |                                                                                                                                                   | 0~20L/min                                                                                                                         |                                                                                      |                                                                                                                                   |                                                                                                                         |
|                            | 20    | 0~10L/min                                                                                                                                         |                                                                                                                                   |                                                                                      |                                                                                                                                   |                                                                                                                         |
| Page                       |       | 14, 16, 18, 20                                                                                                                                    | 14, 16, 20                                                                                                                        | 18, 23                                                                               | 14, 16, 20                                                                                                                        | 20, 23                                                                                                                  |

# MEMS Flow Sensor

[Air](#) [Flow velocity](#) [Analog](#)

| Applicable gas            |       | Air                                                                               |                                                                                   |                                                                                    |                                                                                     |
|---------------------------|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Items                     | Model | D6F-W01A1                                                                         | D6F-V03A1                                                                         | D6F-W04A1                                                                          | D6F-W10A1                                                                           |
| Shape                     |       |  |  |  |  |
| Flow velocity range (m/s) | 10    |                                                                                   |                                                                                   |                                                                                    | 0~10m/s                                                                             |
|                           | 8     |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|                           | 6     |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|                           | 4     |                                                                                   | 0~3m/s                                                                            | 0~4m/s                                                                             |                                                                                     |
|                           | 2     | 0~1m/s                                                                            |                                                                                   |                                                                                    |                                                                                     |
|                           | 0     |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|                           | -2    |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| Page                      |       | 34                                                                                | 36                                                                                | 34                                                                                 | 34                                                                                  |

# MEMS Differential Pressure Sensor

[Air](#) [Differential pressure](#) [Digital](#) [Digital type only](#)

| Applicable gas                   |       | Air                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|----------------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Items                            | Model | D6F-PH0505AD3 <br>D6F-PH0505AD4 <br>D6F-PH0505AMD4  | D6F-PH0025AD1 <br>D6F-PH0025AD2 <br>D6F-PH0025AMD2  | D6F-PH5050AD3 <br>D6F-PH5050AD4 <br>D6F-PH5050AMD4  |
| Shape                            |       |                                                     |                                                     |                                                      |
| Differential pressure range (Pa) | 500   |                                                                                                                                                                                                                                                                                                              | 0~250Pa                                                                                                                                                                                                                                                                                                      | -500~500Pa                                                                                                                                                                                                                                                                                                         |
|                                  | 250   |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|                                  | 50    | -50~50Pa                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|                                  | 0     |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|                                  | -50   |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|                                  | -250  |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
|                                  | -500  |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |
| Page                             |       | 28                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                    |

# D6F-A1

## MEMS Flow Sensor

### A Compact, High-Accuracy Sensor That Measures Low Flow Rates.

- High accuracy of  $\pm 3\%$  FS.
- Flow rates can be measured without being affected by temperature or pressure.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model               |
|------------------|-----------------|---------------------|
| Air              | 0 to 1 L/min    | <b>D6F-01A1-110</b> |
|                  | 0 to 2 L/min    | <b>D6F-02A1-110</b> |

#### Accessory (included)

| Type  | Model             |
|-------|-------------------|
| Cable | <b>D6F-CABLE1</b> |

### Connections

#### D6F-01A1-110

#### D6F-02A1-110

|           |                                  |
|-----------|----------------------------------|
| Pin No.   | 1: Vcc<br>2: Vout<br>3: GND      |
| Connector | 53398-03** (Made by Molex Japan) |

Use the following connectors for connections to the D6F:

|           |                                  |
|-----------|----------------------------------|
| Housing   | 51021-0300 (Made by Molex Japan) |
| Terminals | 50079 (Made by Molex Japan)      |
| Wires     | AWG28 to AWG26                   |

**Tubes** Install tubes made of materials such as rubber or urethane so that they will not come out.  
For urethane tubes, tubes with an outer diameter of 12 mm and an inner diameter of 8 mm are recommended.




Air


Analog

### Output Voltage Characteristics

#### D6F-01A1-110



#### D6F-02A1-110




#### D6F-01A1-110

| Flow rate L/min (normal) | 0                  | 0.2                | 0.4                | 0.6                | 0.8                | 1.0                |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V         | 1.00<br>$\pm 0.12$ | 2.31<br>$\pm 0.12$ | 3.21<br>$\pm 0.12$ | 3.93<br>$\pm 0.12$ | 4.51<br>$\pm 0.12$ | 5.00<br>$\pm 0.12$ |

#### D6F-02A1-110

| Flow rate L/min (normal) | 0                  | 0.4                | 0.8                | 1.2                | 1.6                | 2.0                |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V         | 1.00<br>$\pm 0.12$ | 2.59<br>$\pm 0.12$ | 3.53<br>$\pm 0.12$ | 4.18<br>$\pm 0.12$ | 4.65<br>$\pm 0.12$ | 5.00<br>$\pm 0.12$ |

Measurement conditions: Power supply voltage of  $12 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

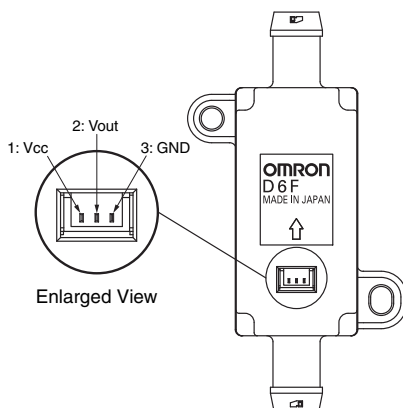



## Characteristics/Performance

| Model                               | D6F-01A1-110                                                                                                 | D6F-02A1-110 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------|
| Flow Range (See note 1.)            | 0 to 1 L/min                                                                                                 | 0 to 2 L/min |
| Calibration Gas (See note 2.)       | Air                                                                                                          |              |
| Flow Port Type                      | Bamboo joint<br>Maximum outside diameter: 8.6 mm, Minimum outside diameter: 7.4 mm                           |              |
| Electrical Connection               | Three-pin connector                                                                                          |              |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |              |
| Current Consumption                 | 15 mA max with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                              |              |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ)                                                     |              |
| Accuracy                            | ±3% FS (25°C characteristic)                                                                                 |              |
| Repeatability (See note 3.)         | ±0.3% FS                                                                                                     |              |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |              |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |              |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |              |
| Rated Output Voltage                | 6 VDC                                                                                                        |              |
| Case                                | PPS                                                                                                          |              |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |              |
| Withstand Pressure                  | 200 kPa                                                                                                      |              |
| Pressure Drop (See note 3.)         | 0.42 kPa                                                                                                     | 1.06 kPa     |
| Operating Temperature (See note 4.) | -10 to 60°C                                                                                                  |              |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |              |
| Storage Temperature (See note 4.)   | -40 to 80°C                                                                                                  |              |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |              |
| Temperature Characteristics         | ±3% FS for 25°C characteristic at an ambient temperature of -10 to 60°C                                      |              |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |              |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |              |
| Weight                              | 12.8 g                                                                                                       |              |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.


## Dimensions

CAD Data Please visit our CAD Data website, which is noted on the last page.


(Unit: mm)

### D6F-01A1-110 D6F-02A1-110


CAD Data

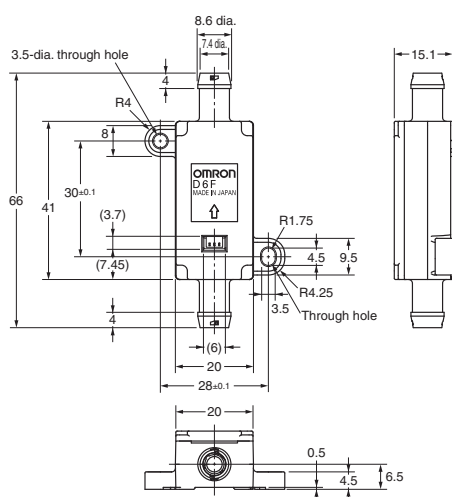

### Mounting Hole Dimensions



### Cable (included): D6F-CABLE1

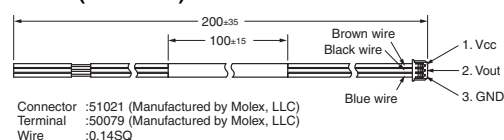

# D6F-N2/-L2

## MEMS Flow Sensor

### A Compact, High-Accuracy Sensor That Measures Low Flow Rates.

- High accuracy of  $\pm 3\%$  FS.
- Flow rates can be measured without being affected by temperature or pressure.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Applicable fluid  | Flow rate range | Model        |
|-------------------|-----------------|--------------|
| Natural gas (13A) | 0 to 1 L/min    | D6F-01N2-000 |
|                   | 0 to 5 L/min    | D6F-05N2-000 |
| LP gas            | 0 to 2 L/min    | D6F-02L2-000 |

#### Accessory (included)

| Type  | Model      |
|-------|------------|
| Cable | D6F-CABLE1 |

### Connections

D6F-01N2-000

D6F-05N2-000

D6F-02L2-000

Pin No. 1: Vcc  
2: Vout  
3: GND


Connector 53398-03\*\* (Made by Molex Japan)

Use the following connectors for connections to the D6F:

Housing 51021-0300 (Made by Molex Japan)

Terminals 50079 (Made by Molex Japan)

Wires AWG28 to AWG26

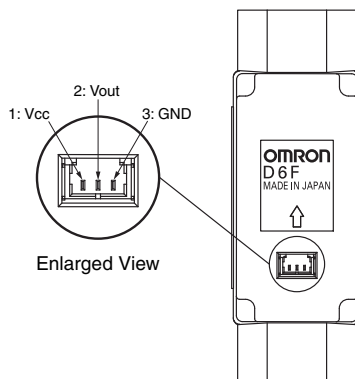


Gas

Analog




### Output Voltage Characteristics


D6F-01N2-000



D6F-05N2-000



D6F-02L2-000



D6F-01N2-000

| Flow rate<br>L/min (normal) | 0                  | 0.2                | 0.4                | 0.6                | 0.8                | 1.0                |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage<br>V         | 1.00<br>$\pm 0.12$ | 1.90<br>$\pm 0.12$ | 2.81<br>$\pm 0.12$ | 3.64<br>$\pm 0.12$ | 4.37<br>$\pm 0.12$ | 5.00<br>$\pm 0.12$ |

D6F-05N2-000

| Flow rate<br>L/min (normal) | 0                  | 1.0                | 2.0                | 3.0                | 4.0                | 5.0                |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage<br>V         | 1.00<br>$\pm 0.12$ | 2.91<br>$\pm 0.12$ | 3.92<br>$\pm 0.12$ | 4.47<br>$\pm 0.12$ | 4.79<br>$\pm 0.12$ | 5.00<br>$\pm 0.12$ |

D6F-02L2-000

| Flow rate<br>L/min (normal) | 0                  | 0.4                | 0.8                | 1.2                | 1.6                | 2.0                |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage<br>V         | 1.00<br>$\pm 0.30$ | 3.02<br>$\pm 0.08$ | 3.95<br>$\pm 0.08$ | 4.47<br>$\pm 0.08$ | 4.79<br>$\pm 0.08$ | 5.00<br>$\pm 0.12$ |

Measurement conditions: Power supply voltage of  $12 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

## Characteristics/Performance

| Model                               | D6F-01N2-000                                                                                                 | D6F-05N2-000 | D6F-02L2-000                                  |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------|
| Flow Range (See note 1.)            | 0 to 1 L/min                                                                                                 | 0 to 5 L/min | 0 to 2 L/min                                  |
| Calibration Gas (See note 2.)       | Natural gas (13A)                                                                                            |              | Propane gas                                   |
| Flow Port Type                      | Rc 1/4 thread                                                                                                |              |                                               |
| Electrical Connection               | Three-pin connector                                                                                          |              |                                               |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |              |                                               |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                             |              |                                               |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ)                                                     |              |                                               |
| Accuracy                            | ±3% FS (25°C characteristic)                                                                                 |              | ±2% to ±7.5% F.S. (25°C characteristic)       |
| Repeatability (See note 3.)         | ±0.2% FS                                                                                                     |              | ±0.3% FS                                      |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |              |                                               |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |              |                                               |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |              |                                               |
| Rated Output Voltage                | 6 VDC                                                                                                        |              |                                               |
| Case                                | Aluminum alloy                                                                                               |              |                                               |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |              |                                               |
| Withstand Pressure                  | 200 kPa                                                                                                      |              |                                               |
| Pressure Drop (See note 3.)         | 0.017 kPa                                                                                                    | 0.10 kPa     | 0.14 kPa                                      |
| Operating Temperature (See note 4.) | -10 to 60°C                                                                                                  |              |                                               |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |              |                                               |
| Storage Temperature (See note 4.)   | -40 to 80°C                                                                                                  |              |                                               |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |              |                                               |
| Temperature Characteristics         | ±3% FS for 25°C characteristic at -10 to 60°C                                                                |              | ±4% FS for 25°C characteristic at -10 to 60°C |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |              |                                               |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |              |                                               |
| Weight                              | 35.3 g                                                                                                       |              |                                               |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions

**CAD Data** Please visit our CAD Data website, which is noted on the last page.


(Unit: mm)

## D6F-01N2-000


## D6F-05N2-000

## D6F-02L2-000


**CAD Data**

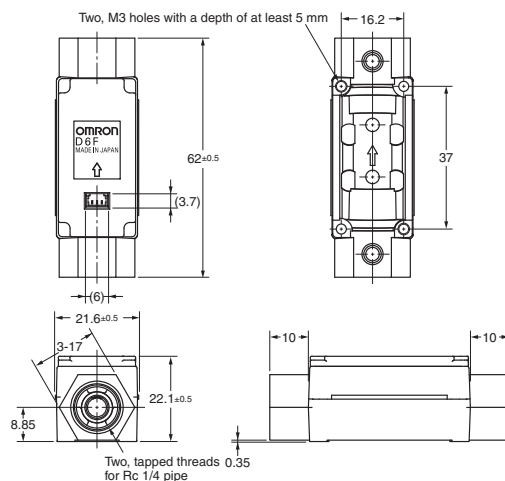

## Mounting Hole Dimensions



## Cable (included): D6F-CABLE1

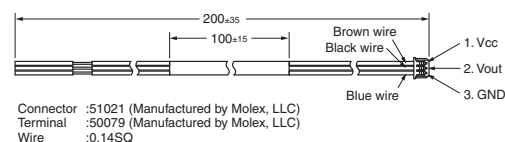

# D6F-A3

## MEMS Flow Sensor

### High-Accuracy Sensing with a Thin, Compact Body.

- A thin, lightweight flow sensor.
- Unique flow path structure provides high precision and fast response.



 Air  Analog

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model        |
|------------------|-----------------|--------------|
| Air              | 0 to 3 L/min    | D6F-03A3-000 |


#### Accessory (Sold separately)

| Type  | Model        |
|-------|--------------|
| Cable | D6F-CABLE2   |
|       | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 38.

### Connections

#### D6F-03A3-000



Pin No.      1: GND  
                 2: Vout  
                 3: Vcc


Connector    SM03B-SRSS-TB (Made by J.S.T. Mfg. Co.)

Use the following connectors made by J.S.T. Mfg. Co. for connections to the Sensor:

- Pressure-welded Connector  
  Socket: 03SR-3S  
  Wires: AWG30  
  Or
- Crimp Connector  
  Contacts: SSH-003T-P0.2  
  Housing: SHR-03V-S or SHR-03V-S-B  
  Wires: AWG32 to AWG28

### Output Voltage Characteristics

#### D6F-03A3-000



#### D6F-03A3-000

| Flow rate<br>L/min (normal) | 0            | 0.6          | 1.2          | 1.8          | 2.4          | 3.0          |
|-----------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output voltage<br>V         | 1.00<br>±0.2 | 2.83<br>±0.2 | 3.77<br>±0.2 | 4.34<br>±0.2 | 4.72<br>±0.2 | 5.00<br>±0.2 |

Measurement conditions: Power supply voltage of  $12 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

## Characteristics/Performance

|                                     |                                                                                                              |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Model                               | D6F-03A3-000                                                                                                 |
| Flow Range (See note 1.)            | 0 to 3 L/min                                                                                                 |
| Calibration Gas (See note 2.)       | Air                                                                                                          |
| Flow Port Type                      | M5 thread                                                                                                    |
| Electrical Connection               | Three-pin connector                                                                                          |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                             |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ)                                                     |
| Accuracy                            | ±5% FS (25°C characteristic)                                                                                 |
| Repeatability (See note 3.)         | ±0.7% FS                                                                                                     |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |
| Rated Output Voltage                | 6 VDC                                                                                                        |
| Case                                | PPS                                                                                                          |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |
| Withstand Pressure                  | 200 kPa                                                                                                      |
| Pressure Drop (See note 3.)         | 0.45 kPa                                                                                                     |
| Operating Temperature (See note 4.) | 0 to 50°C                                                                                                    |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |
| Storage Temperature (See note 4.)   | -10 to 60°C                                                                                                  |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |
| Temperature Characteristics         | ±5% FS for 25°C characteristic at an ambient temperature of 0 to 50°C                                        |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |
| Weight                              | 5.3 g                                                                                                        |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions


**CAD Data** Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)

## ● MEMS Flow Sensors

## D6F-03A3-000

**CAD Data**

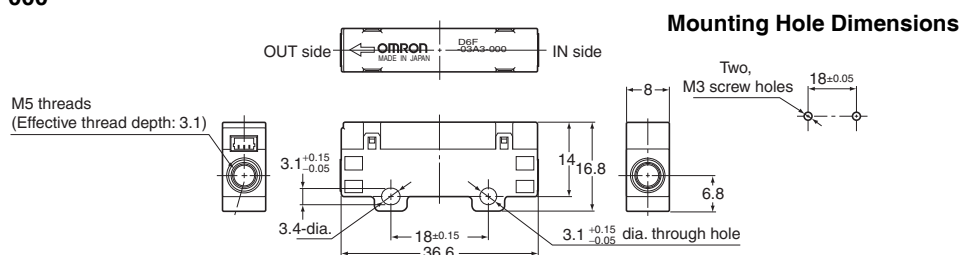



# D6F-A5

MEMS Flow Sensor

## High-Accuracy Sensing with a Compact Body for Flow Rates Up to 50 L/min.

- Accurately detects a mass flow rate of 10 to 50 L/min.
- A compact size of 30 × 78 × 30 mm (H × W × D).

 Air  Analog



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

## Ordering Information

### MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model        |
|----------------|------------------|-----------------|--------------|
| Manifold       | Air              | 0 to 10 L/min   | D6F-10A5-000 |
|                |                  | 0 to 20 L/min   | D6F-20A5-000 |
|                |                  | 0 to 50 L/min   | D6F-50A5-000 |

### Accessory (Sold separately)

| Type  | Model      |
|-------|------------|
| Cable | D6F-CABLE1 |

Note: Refer to *Accessories for the D6F Series* on page 38.


## Connections

D6F-10A5-000  
D6F-20A5-000  
D6F-50A5-000

Pin No. 1: Vcc  
2: Vout  
3: GND  
Connector 53398-03\*\* (Made by Molex Japan)


Use the following connectors for connections to the D6F:  
Housing 51021-0300 (Made by Molex Japan)  
Terminals 50079 (Made by Molex Japan)  
Wires AWG28 to AWG26

1: Vcc 2: Vout 3: GND




## Output Voltage Characteristics


D6F-10A5-000

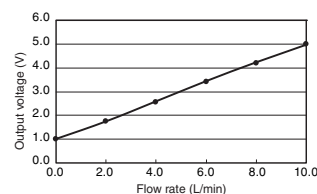

D6F-20A5-000



D6F-50A5-000

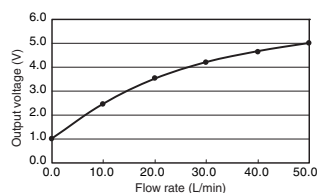

D6F-10A5-000

| Flow rate<br>L/min (normal) | 0             | 2.0           | 4.0           | 6.0           | 8.0           | 10.0          |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 1.75<br>±0.12 | 2.60<br>±0.12 | 3.45<br>±0.12 | 4.25<br>±0.12 | 5.00<br>±0.12 |

D6F-20A5-000

| Flow rate<br>L/min (normal) | 0             | 4.0           | 8.0           | 12.0          | 16.0          | 20.0          |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 1.93<br>±0.12 | 2.87<br>±0.12 | 3.70<br>±0.12 | 4.41<br>±0.12 | 5.00<br>±0.12 |

D6F-50A5-000

| Flow rate<br>L/min (normal) | 0             | 10            | 20            | 30            | 40            | 50            |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 2.45<br>±0.12 | 3.51<br>±0.12 | 4.20<br>±0.12 | 4.66<br>±0.12 | 5.00<br>±0.12 |

Measurement conditions: Power supply voltage of 12±0.1 VDC, ambient temperature of 25±5°C, and ambient humidity of 35% to 75%.

| Model                               | D6F-10A5-000                                                                                                 |               | D6F-20A5-000 | D6F-50A5-000  |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------|--------------|---------------|
| Flow Range (See note 1.)            | 0 to 10 L/min                                                                                                | 0 to 20 L/min |              | 0 to 50 L/min |
| Calibration Gas (See note 2.)       | Air                                                                                                          |               |              |               |
| Flow Port Type                      | Manifold                                                                                                     |               |              |               |
| Electrical Connection               | Three-pin connector                                                                                          |               |              |               |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |               |              |               |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                             |               |              |               |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ)                                                     |               |              |               |
| Accuracy                            | ±3% FS (25°C characteristic)                                                                                 |               |              |               |
| Repeatability (See note 3.)         | ±0.3% FS                                                                                                     |               |              |               |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |               |              |               |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |               |              |               |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |               |              |               |
| Rated Output Voltage                | 6 VDC                                                                                                        |               |              |               |
| Case                                | PPS/aluminum alloy                                                                                           |               |              |               |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |               |              |               |
| Withstand Pressure                  | 500 kPa                                                                                                      |               |              |               |
| Pressure Drop (See note 3.)         | 0.8 kPa                                                                                                      | 2.9 kPa       |              | 17.2 kPa      |
| Operating Temperature (See note 4.) | −10 to 60°C                                                                                                  |               |              |               |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |               |              |               |
| Storage Temperature (See note 4.)   | −30 to 80°C                                                                                                  |               |              |               |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |               |              |               |
| Temperature Characteristics         | ±3% FS for 25°C characteristic at an ambient temperature of −10 to 60°C                                      |               |              |               |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |               |              |               |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |               |              |               |
| Weight                              | 103 g                                                                                                        |               |              |               |

Note: 4. With no condensation or icing.

(Unit: mm)

CAD Data

# D6F-A6

## MEMS Flow Sensor

### High-Accuracy Sensing with a Compact Body for Flow Rates up to 50 L/min.

- Accurately measures an air mass flow rate of 10 to 50 L/min.
- A compact size of 30 × 78 × 30 mm (H × W × D).

➤ Air ➤ Analog



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model                |
|----------------|------------------|-----------------|----------------------|
| Rc 1/4 thread  | Air              | 0 to 10 L/min   | <b>D6F-10A6-000</b>  |
|                |                  | 0 to 20 L/min   | <b>D6F-20A6-000</b>  |
|                |                  | 0 to 50 L/min   | <b>D6F-50A6-000</b>  |
| NPT 1/8 thread |                  | 0 to 10 L/min   | <b>D6F-10A61-000</b> |
|                |                  | 0 to 20 L/min   | <b>D6F-20A61-000</b> |
|                |                  | 0 to 50 L/min   | <b>D6F-50A61-000</b> |

#### Accessory (Sold separately)

| Type  | Model             |
|-------|-------------------|
| Cable | <b>D6F-CABLE1</b> |

Note: Refer to *Accessories for the D6F Series* on page 38.


### Connections

|                     |                      |
|---------------------|----------------------|
| <b>D6F-10A6-000</b> | <b>D6F-10A61-000</b> |
| <b>D6F-20A6-000</b> | <b>D6F-20A61-000</b> |
| <b>D6F-50A6-000</b> | <b>D6F-50A61-000</b> |

Pin No. 1: Vcc  
2: Vout  
3: GND  
Connector 53398-03\*\* (Made by Molex Japan)


Use the following connectors for connections to the D6F:  
Housing 51021-0300 (Made by Molex Japan)  
Terminals 50079 (Made by Molex Japan)  
Wires AWG28 to AWG26

1: Vcc 2: Vout 3: GND




### Output Voltage Characteristics


**D6F-10A6-000**  
**D6F-10A61-000**



**D6F-20A6-000**  
**D6F-20A61-000**



**D6F-50A6-000**  
**D6F-50A61-000**



#### D6F-10A6-000/D6F-10A61-000

| Flow rate L/min (normal) | 0             | 2.0           | 4.0           | 6.0           | 8.0           | 10.0          |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V         | 1.00<br>±0.12 | 1.75<br>±0.12 | 2.60<br>±0.12 | 3.45<br>±0.12 | 4.25<br>±0.12 | 5.00<br>±0.12 |

#### D6F-20A6-000/D6F-20A61-000

| Flow rate L/min (normal) | 0             | 4             | 8             | 12            | 16            | 20            |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V         | 1.00<br>±0.12 | 1.93<br>±0.12 | 2.87<br>±0.12 | 3.70<br>±0.12 | 4.41<br>±0.12 | 5.00<br>±0.12 |

#### D6F-50A6-000/D6F-50A61-000

| Flow rate L/min (normal) | 0             | 10            | 20            | 30            | 40            | 50            |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V         | 1.00<br>±0.12 | 2.45<br>±0.12 | 3.51<br>±0.12 | 4.20<br>±0.12 | 4.66<br>±0.12 | 5.00<br>±0.12 |

Measurement conditions: Power supply voltage of 12±0.1 VDC, ambient temperature of 25±5°C, and ambient humidity of 35% to 75%.

| Model                               | D6F-10A6-000                                                                                                 | D6F-20A6-000  | D6F-50A6-000  | D6F-10A61-000  | D6F-20A61-000 | D6F-50A61-000 |  |  |  |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------|---------------|----------------|---------------|---------------|--|--|--|
| Flow Range (See note 1.)            | 0 to 10 L/min                                                                                                | 0 to 20 L/min | 0 to 50 L/min | 0 to 10 L/min  | 0 to 20 L/min | 0 to 50 L/min |  |  |  |
| Calibration Gas (See note 2.)       | Air                                                                                                          |               |               |                |               |               |  |  |  |
| Flow Port Type                      | Rc 1/4 thread                                                                                                |               |               | NPT 1/8 thread |               |               |  |  |  |
| Electrical Connection               | Three-pin connector                                                                                          |               |               |                |               |               |  |  |  |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |               |               |                |               |               |  |  |  |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                             |               |               |                |               |               |  |  |  |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10kΩ min.)                                                 |               |               |                |               |               |  |  |  |
| Accuracy                            | ±3% FS (25°C characteristic)                                                                                 |               |               |                |               |               |  |  |  |
| Repeatability (See note 3.)         | ±0.3% FS                                                                                                     |               |               |                |               |               |  |  |  |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |               |               |                |               |               |  |  |  |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |               |               |                |               |               |  |  |  |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |               |               |                |               |               |  |  |  |
| Rated Output Voltage                | 6 VDC                                                                                                        |               |               |                |               |               |  |  |  |
| Case                                | PPS/aluminum alloy                                                                                           |               |               |                |               |               |  |  |  |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |               |               |                |               |               |  |  |  |
| Withstand Pressure                  | 500 kPa                                                                                                      |               |               |                |               |               |  |  |  |
| Pressure Drop (See note 3.)         | 0.10 kPa                                                                                                     | 0.28 kPa      | 1.44 kPa      | 0.15 kPa       | 0.52 kPa      | 2.31 kPa      |  |  |  |
| Operating Temperature (See note 4.) | -10 to 60°C                                                                                                  |               |               |                |               |               |  |  |  |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |               |               |                |               |               |  |  |  |
| Storage Temperature (See note 4.)   | -30 to 80°C                                                                                                  |               |               |                |               |               |  |  |  |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |               |               |                |               |               |  |  |  |
| Temperature Characteristics         | ±3% FS for 25°C characteristic at an ambient temperature of -10 to 60°C                                      |               |               |                |               |               |  |  |  |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |               |               |                |               |               |  |  |  |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |               |               |                |               |               |  |  |  |
| Weight                              | 103 g                                                                                                        |               |               |                |               |               |  |  |  |

Note: 4. With no condensation or icing.

(Unit: mm)

CAD Data

# D6F-A7/-L7/-N7

## MEMS Flow Sensor

### Reduction of Piping Time by Quick Joint Connection

- Low-flow rate of natural gas and LP gas can be measured.
- 10 L/min and 30 L/min of Air can be measured.
- Compact size of 30 × 84.6 × 30 mm (H × W × D).

▶ Air ▶ Gas ▶ Analog



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Flow Port Type  | Applicable fluid  | Flow rate range | Model               |
|-----------------|-------------------|-----------------|---------------------|
| Quick joint P10 | Natural gas (13A) | 0 to 5 L/min    | <b>D6F-05N7-000</b> |
|                 | LP gas            | 0 to 2 L/min    | <b>D6F-02L7-000</b> |
|                 | Air               | 0 to 10 L/min   | <b>D6F-10A7-000</b> |
|                 |                   | 0 to 30 L/min   | <b>D6F-30A7-000</b> |

#### Accessories (Sold separately)

| Type                     | Model                   |
|--------------------------|-------------------------|
| Cable                    | <b>D6F-CABLE1</b>       |
| Quick fastener (for P10) | <b>D6F-FASTENER-P10</b> |
| Pipe fittings (for P10)  | <b>D6F-PLG1</b>         |


Note: Refer to *Accessories for the D6F Series* on page 38.

### Connections

**D6F-05N7-000 D6F-02L7-000**  
**D6F-10A7-000 D6F-30A7-000**


Pin No. 1: Vcc  
2: Vout  
3: GND  
Connector 53398-03\*\* (Made by Molex Japan)

Use the following connectors for connections to the D6F:  
Housing 51021-0300 (Made by Molex Japan)  
Terminals 50079 (Made by Molex Japan)  
Wires AWG28 to AWG26




### Output Voltage Characteristics


**D6F-05N7-000**




**D6F-02L7-000**



**D6F-10A7-000**



**D6F-30A7-000**



**D6F-05N7-000**

| Flow rate<br>L/min (normal) | 0             | 1.0           | 2.0           | 3.0           | 4.0           | 5.0           |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 1.68<br>±0.12 | 2.47<br>±0.12 | 3.31<br>±0.12 | 4.15<br>±0.12 | 5.00<br>±0.12 |

**D6F-02L7-000**

| Flow rate<br>L/min (normal) | 0             | 0.4           | 0.8           | 1.2           | 1.6           | 2.0           |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 1.96<br>±0.12 | 2.89<br>±0.12 | 3.72<br>±0.12 | 4.43<br>±0.12 | 5.00<br>±0.12 |

**D6F-10A7-000**

| Flow rate<br>L/min (normal) | 0             | 2.0           | 4.0           | 6.0           | 8.0           | 10.0          |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 1.75<br>±0.12 | 2.60<br>±0.12 | 3.45<br>±0.12 | 4.25<br>±0.12 | 5.00<br>±0.12 |

**D6F-30A7-000**

| Flow rate<br>L/min (normal) | 0             | 6             | 12            | 18            | 24            | 30            |
|-----------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage<br>V         | 1.00<br>±0.12 | 2.11<br>±0.12 | 3.12<br>±0.12 | 3.91<br>±0.12 | 4.53<br>±0.12 | 5.00<br>±0.12 |

Measurement conditions: Power-supply voltage 12±0.1 VDC, ambient temperature 25±5°C and ambient humidity 35 to 75%RH.

## Characteristics/Performance

| Model                                | D6F-05N7-000                                                                                                 |          | D6F-02L7-000 | D6F-10A7-000  | D6F-30A7-000  |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Flow Range (See note 1.)             | 0 to 5 L/min                                                                                                 |          | 0 to 2 L/min | 0 to 10 L/min | 0 to 30 L/min |
| Calibration Gas (See note 2.)        | Natural gas (13A)                                                                                            |          | LP gas       | Air           |               |
| Flow Port Type                       | Quick joint P10                                                                                              |          |              |               |               |
| Electrical Connection                | Three-pin connector                                                                                          |          |              |               |               |
| Power Supply                         | 10.8 to 26.4 VDC                                                                                             |          |              |               |               |
| Current Consumption                  | 15 mA max. with no load and Vcc of 12 to 24 VDC, GND = 0 VDC, 25°C                                           |          |              |               |               |
| Output Voltage                       | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ min.)                                                |          |              |               |               |
| Accuracy                             | ±3%F.S. (25°C characteristic)                                                                                |          |              |               |               |
| Repeatability (See note 3.)          | ±0.3%F.S.                                                                                                    |          |              |               |               |
| Output Voltage (Max.)                | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |          |              |               |               |
| Output Voltage (Min.)                | 0 VDC (Load resistance: 10 kΩ)                                                                               |          |              |               |               |
| Rated Power Supply Voltage           | 26.4 VDC                                                                                                     |          |              |               |               |
| Rated Output Voltage                 | 6 VDC                                                                                                        |          |              |               |               |
| Case                                 | PPS                                                                                                          |          |              |               |               |
| Degree of Protection                 | IEC IP40 (Excluding tubing sections.)                                                                        |          |              |               |               |
| Maximum Allowable Withstand Pressure | 500 kPa                                                                                                      |          |              |               |               |
| Pressure Drop (See note 3.)          | 0.06 kPa                                                                                                     | 0.03 kPa |              | 0.32 kPa      | 2.19 kPa      |
| Operating Temperature (See note 4.)  | −10 to +60°C                                                                                                 |          |              |               |               |
| Operating Humidity (See note 4.)     | 35 to 85%RH                                                                                                  |          |              |               |               |
| Storage Temperature (See note 4.)    | −10 to +80°C                                                                                                 |          |              | −30 to +80°C  |               |
| Storage Humidity (See note 4.)       | 35 to 85%RH                                                                                                  |          |              |               |               |
| Temperature Characteristics          | ±3%F.S. for 25°C characteristic at an ambient temperature of −10 to +60°C                                    |          |              |               |               |
| Insulation Resistance                | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |          |              |               |               |
| Dielectric Strength                  | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |          |              |               |               |
| Weight                               | 72 g                                                                                                         |          |              |               |               |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions

**CAD Data** Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)

## ● MEMS Flow Sensors


**CAD Data**

D6F-05N7-000

D6F-02L7-000

D6F-10A7-000

D6F-30A7-000

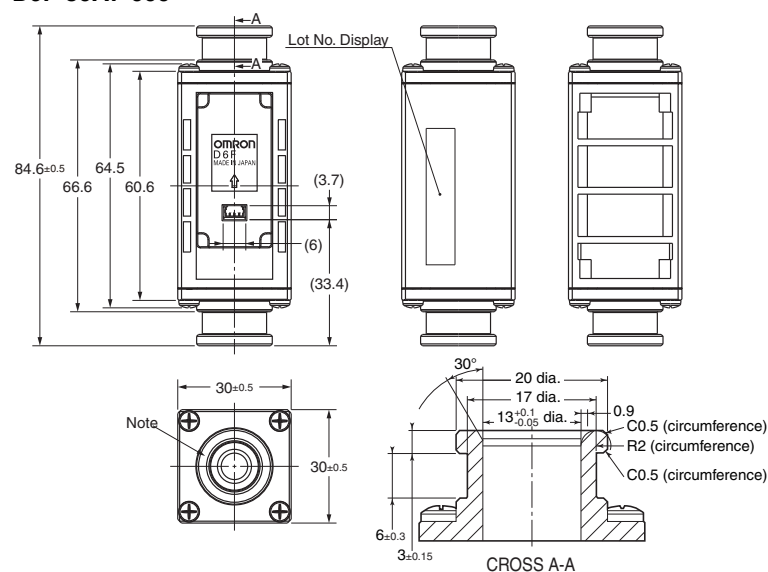


Note. The Port type of pipe fitting based on "Quick Joint P10 Type".

\* P10 shows the name of an O-ring prescribed by JIS B 2401.

\* The port of O-ring ditch is based on P10 of JIS B 2406.

\* Please obtain a male joint separately.

## Recommended Quick joint male P10 type

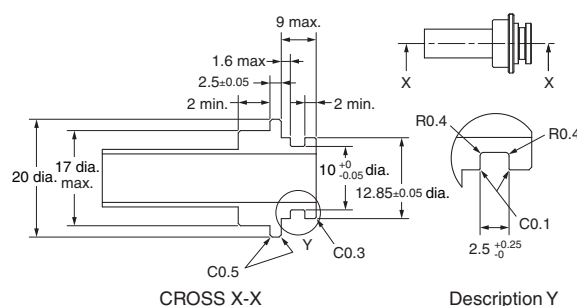

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD <http://www.rgl.co.jp/>

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM10

O ring: O ring P10 fluororubber (material)



# D6F-A7D/-AB71D

## MEMS Flow Sensor

## Digital Compensation for High Accuracy

- Temperature compensation and linear compensation produce high accuracy ( $\pm 3\%$  RD (25% to 100% FS)).
- Compact models for 10 to 70 L/min.
- Reduced piping work with quick-fastening feature.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.



Air Digital

## Ordering Information

### MEMS Flow Sensor

| Joint           | Applicable fluid | Flow rate range | Model             |
|-----------------|------------------|-----------------|-------------------|
| Quick joint P10 | Air              | 0 to 10 L/min   | D6F-10A7D-000-0   |
|                 |                  | 0 to 20 L/min   | D6F-20A7D-000-0   |
|                 |                  | 0 to 50 L/min   | D6F-50A7D-000-0   |
| Quick joint P14 |                  | 0 to 70 L/min   | D6F-70AB71D-000-0 |

### Accessories (Sold separately)

| Type                     | Model            |
|--------------------------|------------------|
| Cable                    | D6F-CABLE3       |
| Quick fastener (for P10) | D6F-FASTENER-P10 |
| Pipe fittings (for P10)  | D6F-PLG1         |

Note: Refer to *Accessories for the D6F Series* on page 38.

## Connections

D6F-10A7D-000-0

D6F-20A7D-000-0


D6F-50A7D-000-0

D6F-70AB71D-000-0

Pin No. 1: Vcc  
2: SDA  
3: SCL  
4: GND


Connector BM04B-GHS (made by J.S.T. Mfg. Co.)

Use the following connectors for connections to the D6F:  
Housing GHR-04V-S (made by J.S.T. Mfg. Co.)  
Terminals SSSL-002T-P0.2 (made by J.S.T. Mfg. Co.)  
Wires AWG26 to AWG30




## Output Characteristics


D6F-10A7D-000-0




D6F-20A7D-000-0



D6F-50A7D-000-0



D6F-70AB71D-000-0



D6F-10A7D-000-0

| Flow rate<br>L/min (normal) | 0              | 2               | 4               | 6               | 8               | 10              |
|-----------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Output<br>(HEX)             | 1024<br>(0400) | 13024<br>(32E0) | 25024<br>(61C0) | 37024<br>(90A0) | 49024<br>(BF80) | 61024<br>(EE60) |

Measurement conditions: Power-supply voltage  $3.3 \pm 0.1$  VDC, ambient temperature  $25 \pm 5^\circ\text{C}$  and ambient humidity 35 to 75%RH.  
Flow rate = (Output value - 1,024)/60,000 x 10

D6F-20A7D-000-0

| Flow rate<br>L/min (normal) | 0              | 4               | 8               | 12              | 16              | 20              |
|-----------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Output<br>(HEX)             | 1024<br>(0400) | 13024<br>(32E0) | 25024<br>(61C0) | 37024<br>(90A0) | 49024<br>(BF80) | 61024<br>(EE60) |

Measurement conditions: Power-supply voltage  $3.3 \pm 0.1$  VDC, ambient temperature  $25 \pm 5^\circ\text{C}$  and ambient humidity 35 to 75%RH.  
Flow rate = (Output value - 1,024)/60,000 x 20

D6F-50A7D-000-0

| Flow rate<br>L/min (normal) | 0              | 10              | 20              | 30              | 40              | 50              |
|-----------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Output<br>(HEX)             | 1024<br>(0400) | 13024<br>(32E0) | 25024<br>(61C0) | 37024<br>(90A0) | 49024<br>(BF80) | 61024<br>(EE60) |

Measurement conditions: Power-supply voltage  $3.3 \pm 0.1$  VDC, ambient temperature  $25 \pm 5^\circ\text{C}$  and ambient humidity 35 to 75%RH.  
Flow rate = (Output value - 1,024)/60,000 x 50

D6F-70AB71D-000-0

| Flow rate<br>L/min (normal) | 0              | 20              | 40              | 60              | 70              |
|-----------------------------|----------------|-----------------|-----------------|-----------------|-----------------|
| Output<br>(HEX)             | 1024<br>(0400) | 13024<br>(32E0) | 25024<br>(61C0) | 37024<br>(90A0) | 43024<br>(A810) |

Measurement conditions: Power-supply voltage  $3.3 \pm 0.1$  VDC, ambient temperature  $25 \pm 5^\circ\text{C}$  and ambient humidity 35 to 75%RH.  
Flow rate = (Output value - 1,024)/60,000 x 100

## Characteristics/Performance

| Model                                | D6F-10A7D-000-0                                                                                              | D6F-20A7D-000-0 | D6F-50A7D-000-0 | D6F-70AB71D-000-0                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------|
| Flow Range (See note 1.)             | 0 to 10L/min                                                                                                 | 0 to 20 L/min   | 0 to 50 L/min   | 0 to 70 L/min                                                                  |
| Calibration Gas (See note 2.)        | Air                                                                                                          |                 |                 |                                                                                |
| Flow Port Type                       | Quick joint P10                                                                                              |                 |                 | Quick joint P14                                                                |
| Electrical Connection                | Four-pin connector                                                                                           |                 |                 |                                                                                |
| Power Supply                         | 3.0 to 3.6 VDC                                                                                               |                 |                 |                                                                                |
| Current Consumption                  | 10 mA max. with no load, Vcc = 3.3 VDC, GND = 0 VDC, 25°C                                                    |                 |                 |                                                                                |
| Resolution                           | 15 bit                                                                                                       |                 |                 |                                                                                |
| Accuracy (See note 3.)               | ±5%RD (10%F.S. ≤ Flow rate < 25%F.S.)<br>±3%RD (25%F.S. ≤ Flow rate ≤ 100%F.S.)                              |                 |                 | ±5%RD (10L/min ≤ Flow rate < 20L/min)<br>±3%RD (20L/min ≤ Flow rate ≤ 70L/min) |
| Response time                        | 90 ms max.                                                                                                   |                 |                 |                                                                                |
| Repeatability (See note 4.)          | 0.3 %RD                                                                                                      | 0.3%RD          | 0.5%RD          | 1.3%RD                                                                         |
| Interface (See note 5.)              | I2C                                                                                                          |                 |                 |                                                                                |
| Case                                 | PPS                                                                                                          |                 |                 |                                                                                |
| Degree of Protection                 | IEC IP40 (Excluding tubing sections.)                                                                        |                 |                 |                                                                                |
| Maximum Allowable Withstand Pressure | 100 kPa                                                                                                      |                 |                 |                                                                                |
| Pressure Drop (See note 4.)          | 0.034 kPa                                                                                                    | 0.083 kPa       | 0.28 kPa        | 0.57 kPa                                                                       |
| Operating Temperature (See note 6.)  | -10 to +60°C                                                                                                 |                 |                 |                                                                                |
| Operating Humidity (See note 6.)     | 35 to 85%RH                                                                                                  |                 |                 |                                                                                |
| Storage Temperature (See note 6.)    | -30 to +80°C                                                                                                 |                 |                 |                                                                                |
| Storage Humidity (See note 6.)       | 35 to 85%RH                                                                                                  |                 |                 |                                                                                |
| Insulation Resistance                | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |                 |                 |                                                                                |
| Dielectric Strength                  | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |                 |                 |                                                                                |
| Weight                               | 57.3 g                                                                                                       |                 |                 | 64.4 g                                                                         |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. -10 ≤ Operating Temperature ≤ 60°C

Note: 4. Reference (typical)

Note: 5. Refer to the *MEMS Flow Sensor D6F-A7D/-AB71D User's Manual* for details.

Note: 6. With no condensation or icing.

Note: 7. The following custom options are available.

Ask your OMRON representative for details.

- Temperature measurement
- Address settings (up to four addresses)
- Fault detection
- Threshold setting

## Communication

|                  |                                                      |
|------------------|------------------------------------------------------|
| Serial Interface | I2C                                                  |
| Master/Slave     | Slave / Address: HEX : 0x6C<br>BIN : 110_1100 (7bit) |
| Speed mode       | Fast Mode 400kHz                                     |
| Signal           |                                                      |
| SCL              | Serial Clock                                         |
| SDA              | Data Signal                                          |

## ● Evaluation Board (Sold separately)

The D6F-A7D/-AB71D MEMS flow sensor can be connected to the OMRON sensor evaluation board.

The following three platforms are supported, and evaluation can easily be performed by connecting the flow sensor, evaluation board, and harness to the platform.

| Platform                                      | Evaluation board | Connection harness (between the evaluation board and sensor) | MEMS flow sensor                                                           | Sample code                                                                                                                       |
|-----------------------------------------------|------------------|--------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| For connecting to Raspberry Pi (See note 1.)  | 2JCIE-EV01-RP1   | 2JCIE-HARNESS-03                                             | D6F-10A7D-000-0<br>D6F-20A7D-000-0<br>D6F-50A7D-000-0<br>D6F-70AB71D-000-0 | <a href="https://github.com/omron-devhub/d6f-2jcieev01-raspberrypi">https://github.com/omron-devhub/d6f-2jcieev01-raspberrypi</a> |
| For connecting to Arduino (See note 2.)       | 2JCIE-EV01-AR1   |                                                              |                                                                            | <a href="https://github.com/omron-devhub/d6f-2jcieev01-arduino">https://github.com/omron-devhub/d6f-2jcieev01-arduino</a>         |
| For connecting to ESP32 Feather (See note 3.) | 2JCIE-EV01-FT1   |                                                              |                                                                            | <a href="https://github.com/omron-devhub/d6f-2jcieev01-arduino">https://github.com/omron-devhub/d6f-2jcieev01-arduino</a>         |

For more information about the evaluation board, please visit the following URL.

(<https://components.omron.com/sensor/evaluation-board/2jcie>)

Note: 1. Raspberry Pi is a registered trademark of the Raspberry Pi Foundation.

Note: 2. Arduino is a registered trademark of Arduino LLC and Arduino SRL.

Note: 3. Feather is a registered trademark of Adafruit Industries LLC.

## Dimensions

CAD Data Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)


### MEMS Flow Sensors

D6F-10A7D-000-0


D6F-20A7D-000-0

D6F-50A7D-000-0

CAD Data

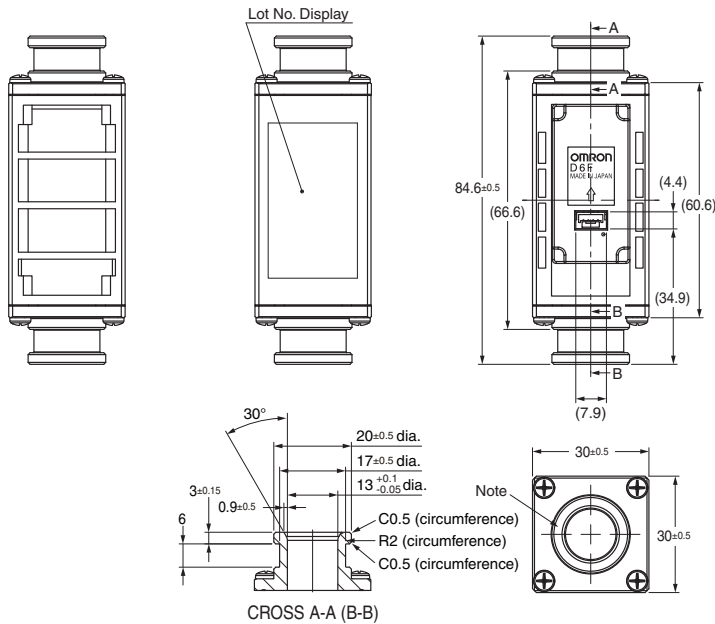

### Recommended Quick joint male P10 type

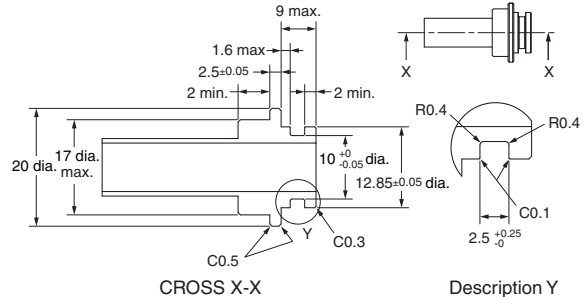

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD <http://www.rgl.co.jp/>

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM10  
O ring: O ring P10 fluororubber (material)

Note 1. Note . The Port type of pipe fitting based on "Quick Joint P10 Type".

\* P10 shows the name of an O-ring prescribed by JIS B 2401.

\* The port of O-ring ditch is based on P10 of JIS B 2406.

\* Please obtain a male joint separately.

Note 2. Use the following connectors to connect to the Sensor.

Connector :GHR-04V-S (JST)


Terminals :SSHL-002T-P0.2 (JST)

Wires :AWG26 to AWG30


Circuit numbers :1.Vcc, 2.SDA, 3.SCL, 4.GND

### D6F-70AB71D-000-0

CAD Data

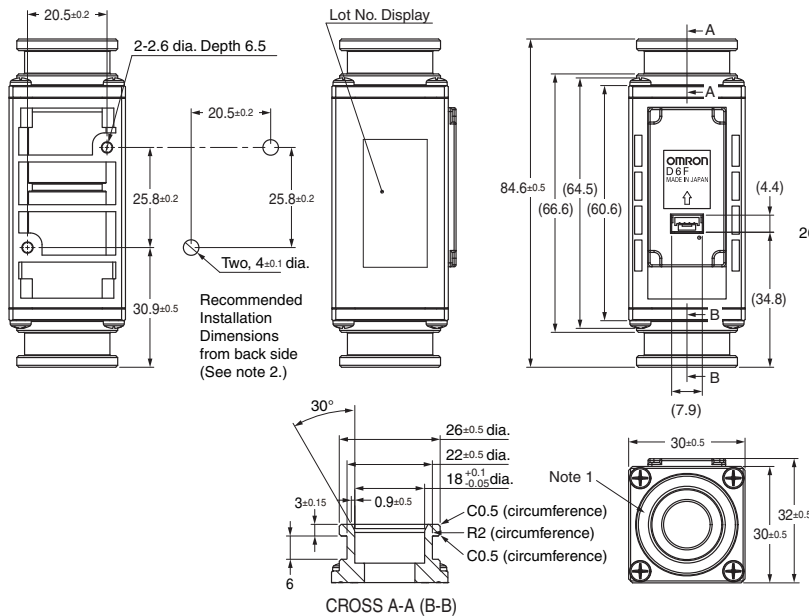

### Recommended Quick joint male P14 type

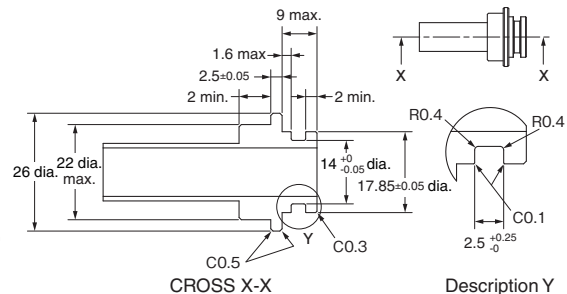

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD <http://www.rgl.co.jp/>

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM14  
O ring: O ring P14 fluororubber (material)

Note 1. The Port type of pipe fitting based on "Quick Joint P14 Type".

\* P14 shows the name of an O-ring prescribed by JIS B 2401.

\* The port of O-ring ditch is based on P14 of JIS B 2406.

\* Please obtain a male joint separately.

Note 2. To mount the Sensor with 2.6-dia. holes, use P-type self-tapping screws with a nominal diameter of 3 mm and tighten them to a torque of 1.2 N-m max. The screw threads must engage for 5.5 mm min.

Note 3. Use the following connectors to connect to the Sensor.

Connector :GHR-04V-S (JST)

Terminals :SSHL-002T-P0.2 (JST)

Wires :AWG26 to AWG30

Circuit numbers :1.Vcc, 2.SDA, 3.SCL, 4.GND

# D6F-AB71

MEMS Flow Sensor

## Reduction of Piping Time by Quick Joint Connection

Air Analog

- Reduce the influence of pulsation flow by bypass flow path
- Compact size of 30 × 84.6 × 32 mm (H × W × D).

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.



## Ordering Information

### MEMS Flow Sensor

| Flow Port Type  | Applicable fluid | Flow rate range | Model          |
|-----------------|------------------|-----------------|----------------|
| Quick joint P14 | Air              | 0 to 30 L/min   | D6F-30AB71-000 |
|                 |                  | 0 to 70 L/min   | D6F-70AB71-000 |

### Accessory (Sold separately)

| Type  | Model      |
|-------|------------|
| Cable | D6F-CABLE1 |

Note: Refer to *Accessories for the D6F Series* on page 38.


## Connections

### D6F-30AB71-000

### D6F-70AB71-000


Pin No. 1: Vcc  
2: Vout  
3: GND  
Connector 53398-03\*\* (Made by Molex Japan)

Use the following connectors for connections to the D6F:  
Housing 51021-0300 (Made by Molex Japan)  
Terminals 50079 (Made by Molex Japan)  
Wires AWG28 to AWG26




## Output Voltage Characteristics

### D6F-30AB71-000



### D6F-70AB71-000



### D6F-30AB71-000

| Flow rate L/min (normal) | 0             | 6             | 12            | 18            | 24            | 30            |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V         | 1.00<br>±0.12 | 1.25<br>±0.12 | 1.91<br>±0.12 | 2.75<br>±0.12 | 3.78<br>±0.12 | 5.00<br>±0.12 |

### D6F-70AB71-000

| Flow rate L/min (normal) | 0             | 14            | 28            | 42            | 56            | 70            |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V         | 1.00<br>±0.12 | 1.43<br>±0.12 | 2.25<br>±0.12 | 3.14<br>±0.12 | 4.06<br>±0.12 | 5.00<br>±0.12 |

Measurement conditions: Power-supply voltage 12±0.1 VDC, ambient temperature 25±5°C and ambient humidity 35 to 75%RH.

## Characteristics/Performance

| Model                               | D6F-30AB71-000                                                                                               | D6F-70AB71-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------|
| Flow Range (See note 1.)            | 0 to 30 L/min                                                                                                | 0 to 70 L/min  |
| Calibration Gas (See note 2.)       | Air                                                                                                          |                |
| Flow Port Type                      | Quick joint P14                                                                                              |                |
| Electrical Connection               | Three-pin connector                                                                                          |                |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |                |
| Current Consumption                 | 15 mA max. with no load and Vcc of 12 to 24 VDC, GND = 0 VDC, 25°C                                           |                |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ min.)                                                |                |
| Accuracy                            | ±3%F.S. (25°C characteristic)                                                                                |                |
| Repeatability (See note 3.)         | ±0.3%F.S.                                                                                                    |                |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |                |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |                |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |                |
| Rated Output Voltage                | 6 VDC                                                                                                        |                |
| Case                                | PPS                                                                                                          |                |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |                |
| Withstand Pressure                  | 100 kPa                                                                                                      |                |
| Pressure Drop (See note 3.)         | 0.88 kPa                                                                                                     | 3.49 kPa       |
| Operating Temperature (See note 4.) | -10 to +60°C                                                                                                 |                |
| Operating Humidity (See note 4.)    | 35 to 85%RH                                                                                                  |                |
| Storage Temperature (See note 4.)   | -30 to +80°C                                                                                                 |                |
| Storage Humidity (See note 4.)      | 35 to 85%RH                                                                                                  |                |
| Temperature Characteristics         | ±3%F.S. for 25°C characteristic at an ambient temperature of -10 to +60°C                                    |                |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |                |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |                |
| Weight                              | 75 g                                                                                                         |                |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions

**CAD Data** Please visit our CAD Data website, which is noted on the last page.


(Unit: mm)

## ● MEMS Flow Sensors


## D6F-30AB71-000

## D6F-70AB71-000

**CAD Data**

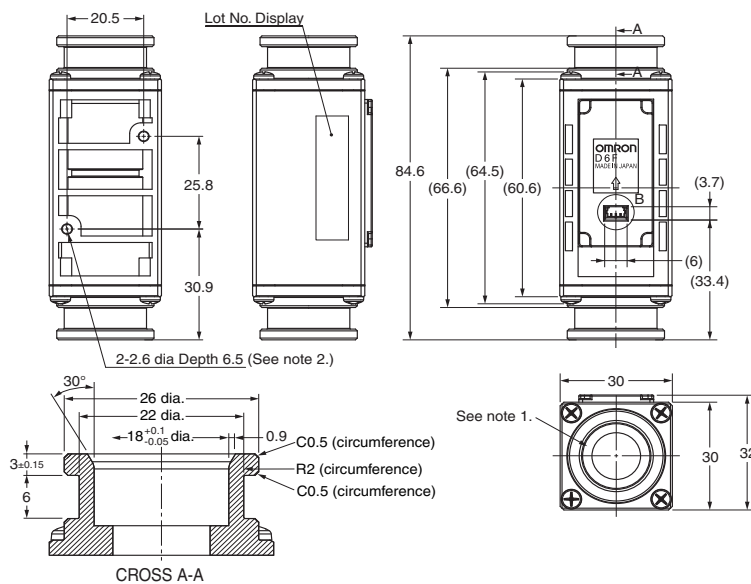

## Recommended Quick joint male P14 type

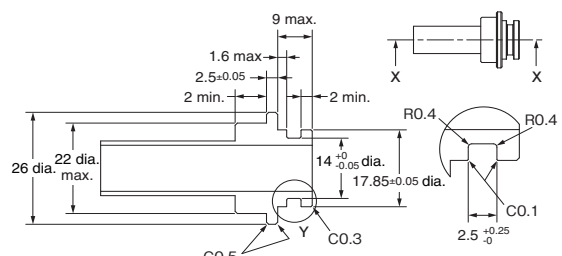

## CROSS X-X

## Description Y

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD <http://www.rgl.co.jp/>

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM14

O ring: O ring P14 fluororubber (material)

- Note 1. The flow path inlet and outlet ports conform to P14-type female quick-connect joints.  
(The tube inlet and outlet ports have the same shape.)  
\* P14 is the number of an O-ring specified in JIS B 2401.  
\* The O-ring groove in the male joint must conform to P14 in JIS B 2406.  
\* Please obtain a male joint separately.
- Note 2. To mount the Sensor with 2.6-dia. holes, use P-type self-tapping screws with a nominal diameter of 3 mm and tighten them to a torque of 1.2 N·m max. The screw threads must engage for 5.5 mm min.
- Note 3. Use the following connectors to connect to the Sensor.  
Connector : GHR-04V-S (JST)  
Terminals : SSHL-002T-P0.2 (JST)  
Wires : AWG26 to AWG30  
Circuit numbers : 1. Vcc, 2. SDA, 3. SCL, and 4. GND.


# D6F-P

## MEMS Flow Sensor

### A Compact, High-Acuracy Flow Sensor with Superior Resistance to Environments.

 Air
  Analog

- Anti-dust performance is improved using the Cyclon method.
- A full lineup of models with different connector types: bamboo joints, lead terminals for direct mounting on-board, and manifolds.
- High accuracy of  $\pm 5\%$  FS.

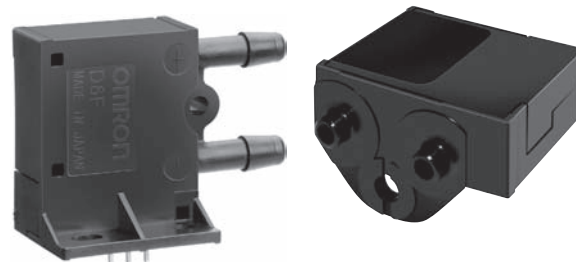

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

## Ordering Information

### MEMS Flow Sensor

| Flow Port Type | Connection     | Applicable fluid | Flow Rate Change | Model        |
|----------------|----------------|------------------|------------------|--------------|
| Bamboo joint   | Lead terminals | Air              | 0 to 0.1 L/min   | D6F-P0001A1  |
|                |                |                  |                  | D6F-P0010A1  |
| Manifold       | Connector      |                  | 0 to 1 L/min     | D6F-P0010A2  |
|                |                |                  |                  | D6F-P0010AM2 |


### Accessory (Sold separately)

| Type  | Model        |
|-------|--------------|
| Cable | D6F-CABLE2   |
|       | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 38.

## Output Voltage Characteristics


### D6F-P0001A1



| Flow rate<br>L/min (normal) | 0                  | 0.02               | 0.04               | 0.06               | 0.08               | 0.10               |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage<br>V         | 0.50<br>$\pm 0.10$ | 0.90<br>$\pm 0.10$ | 1.30<br>$\pm 0.10$ | 1.70<br>$\pm 0.10$ | 2.10<br>$\pm 0.10$ | 2.50<br>$\pm 0.10$ |

Measurement conditions: Power supply voltage of  $5.0 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

### D6F-P0010A1/-P0010A2/-P0010AM2



| Flow rate<br>L/min (normal) | 0                  | 0.25               | 0.50               | 0.75               | 1.00               |
|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage<br>V         | 0.50<br>$\pm 0.10$ | 1.60<br>$\pm 0.10$ | 2.10<br>$\pm 0.10$ | 2.31<br>$\pm 0.10$ | 2.50<br>$\pm 0.10$ |

Measurement conditions: Power supply voltage of  $5.0 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.


Characteristics/Performance

| Model                               | D6F-P0001A1                                                                                                  |  | D6F-P0010A1  | D6F-P0010A2         | D6F-P0010AM2 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|--|--------------|---------------------|--------------|
| Flow Range (See note 1.)            | 0 to 0.1 L/min                                                                                               |  | 0 to 1 L/min |                     |              |
| Calibration Gas (See note 2.)       | Air                                                                                                          |  |              |                     |              |
| Flow Port Type                      | Bamboo joint<br>Maximum outside diameter: 4.9 mm, minimum outside diameter: 4.0 mm                           |  |              |                     | Manifold     |
| Electrical Connection               | Lead terminals                                                                                               |  |              | Three-pin connector |              |
| Power Supply                        | 4.75 to 5.25 VDC                                                                                             |  |              |                     |              |
| Current Consumption                 | 15 mA max. with no load and a Vcc of 5.0 V                                                                   |  |              |                     |              |
| Output Voltage                      | 0.5 to 2.5 VDC (Load resistance: 10 kΩ)                                                                      |  |              |                     |              |
| Accuracy                            | ±5% FS (25°C characteristic)                                                                                 |  |              |                     |              |
| Repeatability (See note 3.)         | ±1.0% FS                                                                                                     |  | ±0.4% FS     |                     |              |
| Output Voltage (Max.)               | 3.1 VDC (Load resistance: 10 kΩ)                                                                             |  |              |                     |              |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |  |              |                     |              |
| Rated Power Supply Voltage          | 10 VDC                                                                                                       |  |              |                     |              |
| Rated Output Voltage                | 4 VDC                                                                                                        |  |              |                     |              |
| Case                                | PBT                                                                                                          |  |              |                     |              |
| Degree of Protection                | IEC IP40 (Excluding tubing sections.)                                                                        |  |              |                     |              |
| Withstand Pressure (See note 3.)    | 50 kPa                                                                                                       |  |              |                     |              |
| Pressure Drop (See note 3.)         | 0.005 kPa                                                                                                    |  | 0.19 kPa     |                     | 0.67 kPa     |
| Operating Temperature (See note 4.) | −10 to +60°C                                                                                                 |  |              |                     |              |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |  |              |                     |              |
| Storage Temperature (See note 4.)   | −40 to +80°C                                                                                                 |  |              |                     |              |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |  |              |                     |              |
| Temperature Characteristics         | ±5% FS for 25°C characteristic at an ambient temperature of -10 to +60°C                                     |  |              |                     |              |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |  |              |                     |              |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |  |              |                     |              |
| Weight                              | 8.5 g                                                                                                        |  |              |                     | 8.0 g        |


Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.  
Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)  
Note: 3. Reference (typical)  
Note: 4. With no condensation or icing.

Tubing


You can measure large flows by mounting the Sensor on a bypass.

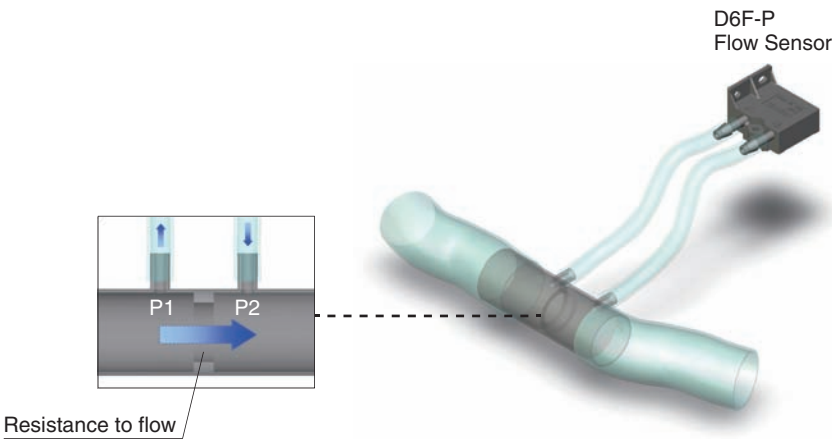

Mounting Direction  
Bamboo joint Sensor



Manifold-type Sensor





## Connections/Dimensions


CAD Data Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)

### ● Lead Terminals

#### D6F-P0001A1/D6F-P0010A1


CAD Data

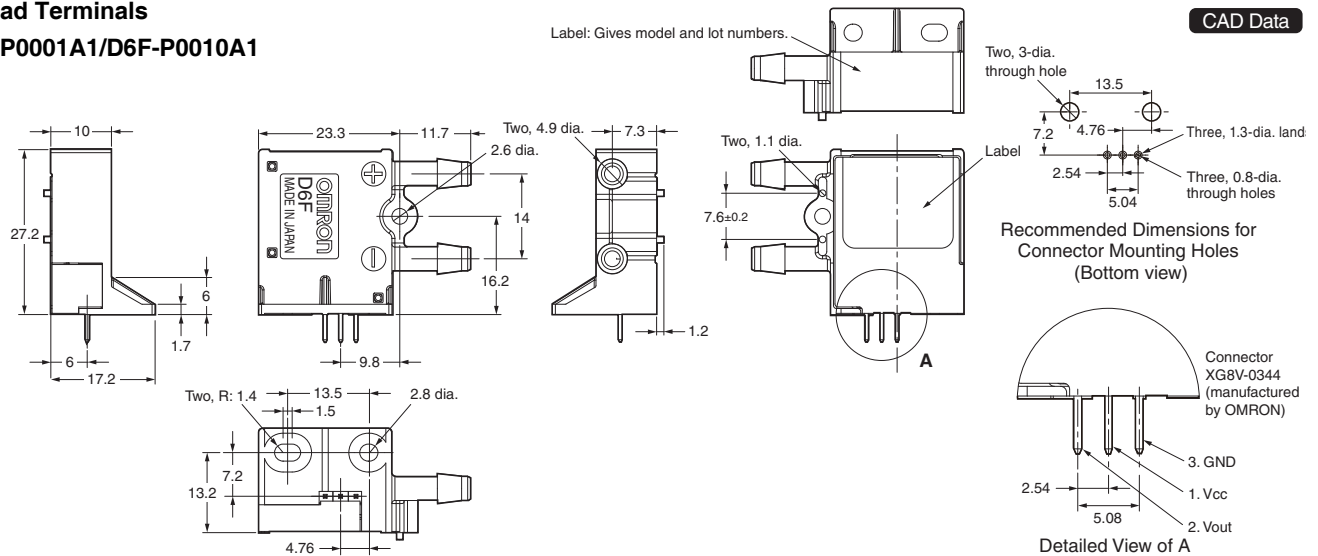

### ● Connectors


#### D6F-P0010A2

CAD Data

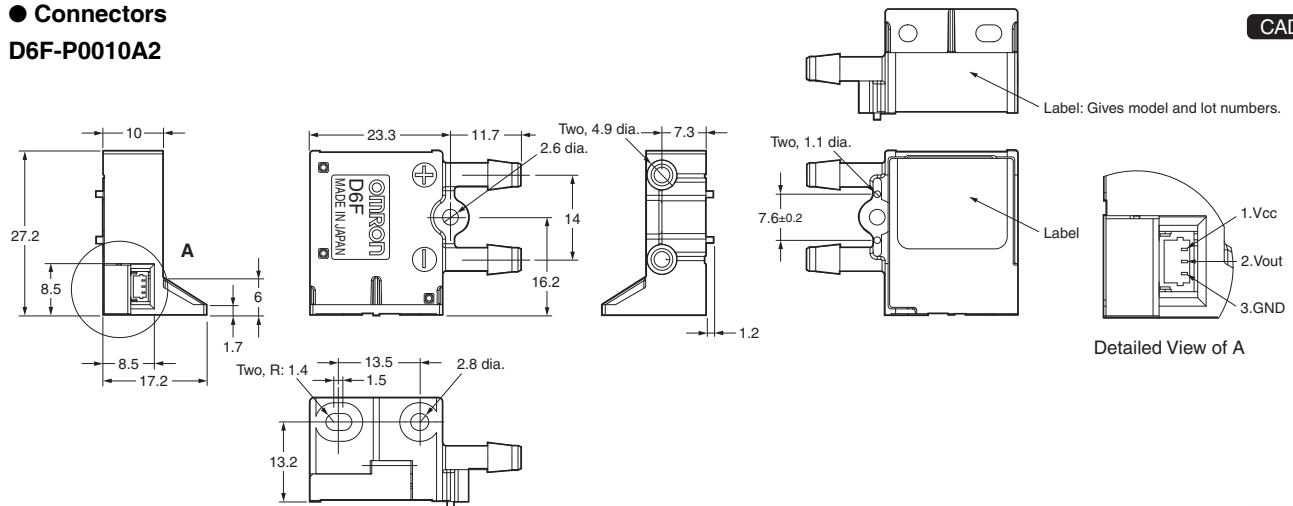


#### D6F-P0010AM2

CAD Data

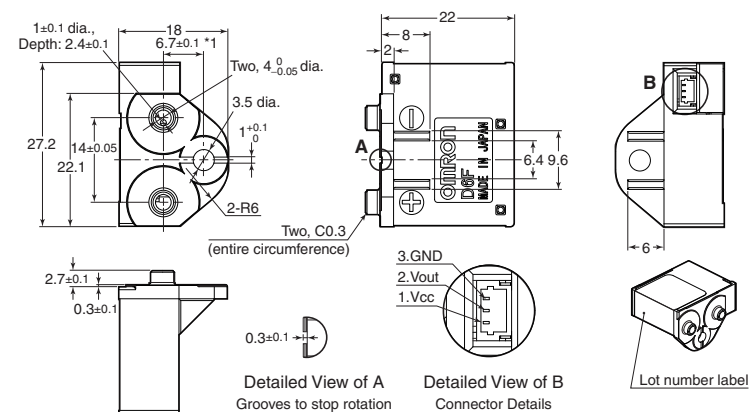

\*1. Recommended Installation Dimensions

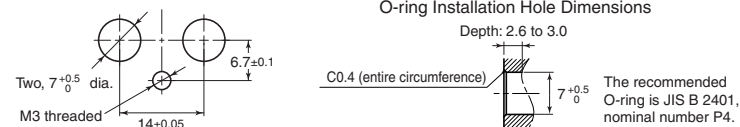

Pin No. 1: Vcc  
2: Vout  
3: GND

Connector SM03B-SRSS-TB (made by J.S.T. Mfg. Co.)

Note: Use one of the following connectors from JST Mfg. Co., Ltd. to connect to the D6F.

- 1) Pressure welding connector  
Socket: 03SR-3S  
Wire: AWG#30  
Or
- 2) Crimp type connector  
Contact: SSH-003T-P0.2  
Housing: SHR-03V-S  
Wire: AWG#32 to #28

#### Tubes

Install tubes made of materials such as rubber or urethane so that they will not come out.

For urethane tubes, tubes with an outer diameter of 6 mm and an inner diameter of 4 mm are recommended.

#### Soldering Conditions

Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max.

(This applies only to PCB-mounting Sensors.)

# D6F-PH

## MEMS Differential Pressure Sensor

### A Compact, High-Accuracy Differential Pressure Sensor with Superior Resistance to Environments.

 Air  Digital



- High accuracy of  $\pm 3\%$  RD
- Linearized and temperature compensated
- Digital output (I2C communication)
- High flow impedance to reduce the influence of bypass configuration

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

| Applicable fluid<br>(See note 1.) | Differential pressure range<br>(See note 3.) | Flow Port Type | Connection     | Model          |
|-----------------------------------|----------------------------------------------|----------------|----------------|----------------|
| Air<br>(See note 2.)              | 0 to 250 Pa                                  | Bamboo joint   | Lead terminals | D6F-PH0025AD1  |
|                                   |                                              |                | Connector      | D6F-PH0025AD2  |
|                                   |                                              | Manifold       | Connector      | D6F-PH0025AMD2 |
|                                   | $\pm 50$ Pa                                  | Bamboo joint   | Lead terminals | D6F-PH0505AD3  |
|                                   |                                              |                | Connector      | D6F-PH0505AD4  |
|                                   |                                              | Manifold       | Connector      | D6F-PH0505AMD4 |
|                                   | $\pm 500$ Pa                                 | Bamboo joint   | Lead terminals | D6F-PH5050AD3  |
|                                   |                                              |                | Connector      | D6F-PH5050AD4  |
|                                   |                                              | Manifold       | Connector      | D6F-PH5050AMD4 |

Note. Models with different slave addresses are also available. Consult your OMRON representative for details.

Note: 1. The Sensor be calibrated for different gas types. Consult your Omron representative.

Note: 2. Dry gas must not contain large particles, e.g., dust, oil, or mist.

Note: 3. At standard atmospheric pressure (1013.25 hPa)

#### ● Accessory (Sold separately)

| Type  | Model      |
|-------|------------|
| Cable | D6F-CABLE3 |

Note. This cable is for connection with the D6F-PH0025AD2, D6F-PH0025AMD2, D6F-PH0505AD4, D6F-PH0505AMD4, D6F-PH5050AD4, and D6F-PH5050AMD4 connector-type models. One side is a connector and the other side is a lead wire.

Note. Refer to *Accessories for the D6F Series* on page 38.

#### ● Evaluation Board (Sold separately)

The D6F-PH MEMS differential pressure sensor can be connected to the OMRON sensor evaluation board.

The following three platforms are supported, and evaluation can easily be performed by connecting the differential pressure sensor, evaluation board, and harness to the platform.

| Platform                                         | Evaluation board | Sample code                                                                                                                       | Connection harness (between the evaluation board and D6F-PH) | Compatible differential pressure sensor D6F-PH                                                        |
|--------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| For connecting to Raspberry Pi<br>(See note 1.)  | 2JCIE-EV01-RP1   | <a href="https://github.com/omron-devhub/d6f-2jcieev01-raspberrypi">https://github.com/omron-devhub/d6f-2jcieev01-raspberrypi</a> | 2JCIE-HARNESS-02<br>(See note 4.)                            | D6F-PH0025AD1<br>D6F-PH0505AD3<br>D6F-PH5050AD3                                                       |
| For connecting to Arduino<br>(See note 2.)       | 2JCIE-EV01-AR1   | <a href="https://github.com/omron-devhub/d6f-2jcieev01-arduino">https://github.com/omron-devhub/d6f-2jcieev01-arduino</a>         | 2JCIE-HARNESS-03<br>(See note 5.)                            | D6F-PH0025AD2<br>D6F-PH0505AD4<br>D6F-PH5050AD4<br>D6F-PH0025AMD2<br>D6F-PH0505AMD4<br>D6F-PH5050AMD4 |
| For connecting to ESP32 Feather<br>(See note 3.) | 2JCIE-EV01-FT1   | <a href="https://github.com/omron-devhub/d6f-2jcieev01-arduino">https://github.com/omron-devhub/d6f-2jcieev01-arduino</a>         |                                                              |                                                                                                       |

For more information about the evaluation board, please visit the following URL.

(<https://components.omron.com/sensor/evaluation-board/2jcie>)

For information on how to use the sample code, please refer to the D6F-PH User's Manual.

Note: 1. Raspberry Pi is a registered trademark of the Raspberry Pi Foundation.

Note: 2. Arduino is a registered trademark of Arduino LLC and Arduino SRL.


Note: 3. Feather is a registered trademark of Adafruit Industries LLC.

Note: 4. The 2JCIE-HARNESS-02 is a connector on one side and a lead wire on the other. The lead wire must be connected to the D6F-PH for use.

Note: 5. The 2JCIE-HARNESS-03 has connectors on both sides. Both the D6F-PH and the evaluation board can be easily connected using these connectors.

## Output Characteristics

**D6F-PH0025AD1**  
**D6F-PH0025AD2**  
**D6F-PH0025AMD2**

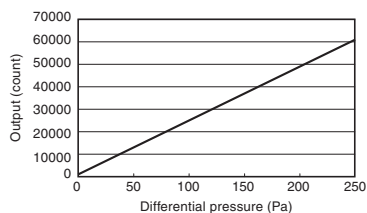


| Differential pressure (Pa) | 0           | 50           | 100          | 150          | 200          | 250          |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX)               | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of  $3.3 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

Differential pressure conversion formula:  $Dp = (Op - 1024) / 60000 \times 250$

Dp = Differential pressure, Op = Output

**D6F-PH5050AD3**  
**D6F-PH5050AD4**  
**D6F-PH5050AMD4**

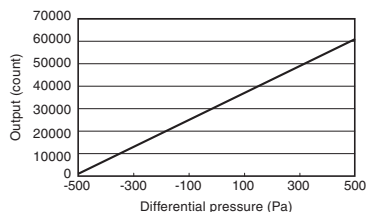


| Differential pressure (Pa) | -500        | -300         | -100         | 0            | 100          | 300          | 500          |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX)               | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 31024 (7930) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of  $3.3 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

Differential pressure conversion formula:  $Dp = (Op - 1024) / 60000 \times 1000 - 500$

Dp = Differential pressure, Op = Output

**D6F-PH0505AD3**  
**D6F-PH0505AD4**  
**D6F-PH0505AMD4**

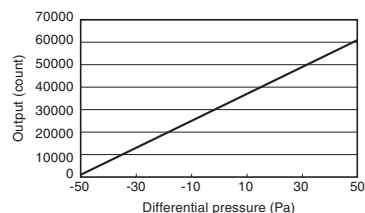

| Differential pressure (Pa) | -50         | -30          | -10          | 0            | 10           | 30           | 50           |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX)               | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 31024 (7930) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of  $3.3 \pm 0.1$  VDC, ambient temperature of  $25 \pm 5^\circ\text{C}$ , and ambient humidity of 35% to 75%.

Differential pressure conversion formula:  $Dp = (Op - 1024) / 60000 \times 100 - 50$

Dp = Differential pressure, Op = Output

Note. Change of gas density affects the sensor output.

Change of atmospheric pressure is compensated by the following formula.

$Dpeff = Dp \times (Pstd / Pamb)$

Dpeff: Effective differential pressure

Dp: Differential pressure of the sensor output

Pstd: Standard atmospheric pressure (1013.25 hPa)

Pamb: Actual ambient atmospheric pressure (hPa)

Characteristics/Performance

| Model                                    | D6F-<br>PH0025AD1                                                                                            | D6F-<br>PH0025AD2     | D6F-<br>PH0025AMD2    | D6F-<br>PH0505AD3                                                                        | D6F-<br>PH0505AD4     | D6F-<br>PH0505AMD4    | D6F-<br>PH5050AD3                                                                        | D6F-<br>PH5050AD4     | D6F-<br>PH5050AMD4    |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|------------------------------------------------------------------------------------------|-----------------------|-----------------------|------------------------------------------------------------------------------------------|-----------------------|-----------------------|
| Differential pressure range (See note 1) | 0 to 250 Pa                                                                                                  |                       |                       |                                                                                          | ±50 Pa                |                       | ±500 Pa                                                                                  |                       |                       |
| Calibration Gas (See note 2.)            | Air                                                                                                          |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Port Type                                | Bamboo joint<br>Maximum outside diameter:<br>4.9 mm, minimum outside<br>diameter: 4.0 mm                     |                       | Manifold              | Bamboo joint<br>Maximum outside diameter:<br>4.9 mm, minimum outside<br>diameter: 4.0 mm |                       | Manifold              | Bamboo joint<br>Maximum outside diameter:<br>4.9 mm, minimum outside<br>diameter: 4.0 mm |                       | Manifold              |
| Electrical Connection                    | Lead<br>terminals                                                                                            | Four-pin<br>connector | Four-pin<br>connector | Lead<br>terminals                                                                        | Four-pin<br>connector | Four-pin<br>connector | Lead<br>terminals                                                                        | Four-pin<br>connector | Four-pin<br>connector |
| Power Supply                             | 2.3 to 3.6 VDC                                                                                               |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Current Consumption                      | 6 mA max. with no load and Vcc of 3.3 VDC, GND = 0 VDC, 25°C                                                 |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Resolution                               | 12 bit                                                                                                       |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Zero point tolerance (See note 3.)       | ±0.2 Pa                                                                                                      |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Span tolerance (See note 3.)             | ±3% RD                                                                                                       |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Span shift due to temperature variation  | < 0.5% RD per 10°C                                                                                           |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Response time                            | 33 ms typical at 12 bit resolution (50 ms max.)<br>The processing time is 6 ms typical at 12 bit resolution. |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Gas flow through sensor (See note 5.)    | 63 mL/min                                                                                                    |                       |                       |                                                                                          | 23 mL/min             |                       | 100 mL/min                                                                               |                       |                       |
| Interface                                | I2C                                                                                                          |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Case material                            | PPS                                                                                                          |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Degree of Protection                     | IEC IP40 (Excluding tubing sections.)                                                                        |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Withstand Pressure                       | 10 kPa                                                                                                       |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Operating temperature (See note 4.)      | -20 to +80°C                                                                                                 |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Operating humidity (See note 4.)         | 35 to 85 %RH                                                                                                 |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Storage temperature (See note 4.)        | -40 to +80°C                                                                                                 |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Storage humidity (See note 4.)           | 35 to 85 %RH                                                                                                 |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Insulation Resistance                    | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Dielectric Strength                      | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |                       |                       |                                                                                          |                       |                       |                                                                                          |                       |                       |
| Weight                                   | 5.0 g                                                                                                        | 5.0 g                 | 5.4 g                 | 5.0 g                                                                                    | 5.0 g                 | 5.4 g                 | 5.0 g                                                                                    | 5.0 g                 | 5.4 g                 |

Note: 1. At standard atmospheric pressure (1013.25 hPa)


Note: 2. Dry gas must not contain large particles, e.g., dust, oil, or mist.

Note: 3. The zero point tolerance and span tolerance are independent uncertainties and add according to the principles of error propagation.

Note: 4. With no condensation or icing.


Note: 5. Type D6F-PH is based on thermal flow principle. Air flow is needed to measure the differential pressure.  
Typical characteristic of air flow by differential pressure is below.

Relation between pressure and flow rate

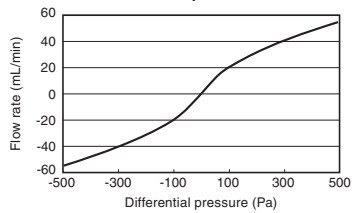

Tubing (Example for Bamboo Joint)

You can use the bypass method to connect and measure the differential pressure.

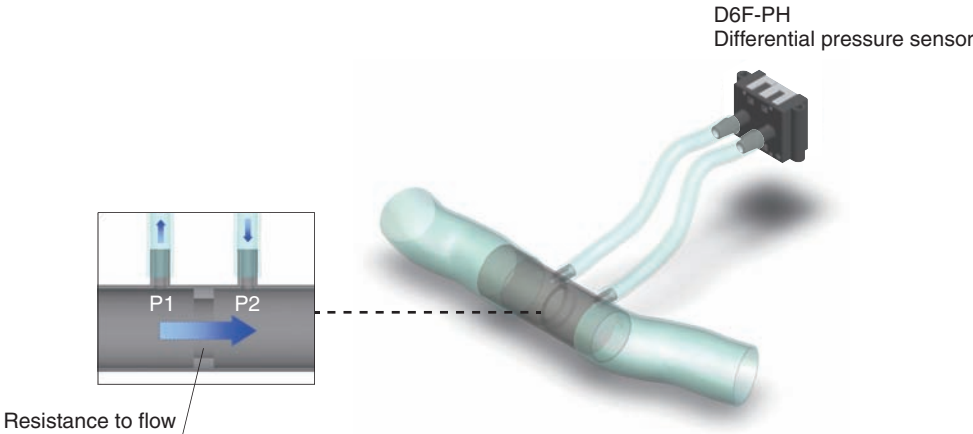

## Connections/Dimensions

CAD Data Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)



### ● Lead Terminals

D6F-PH0025AD1



D6F-PH0505AD3

D6F-PH5050AD3

CAD Data

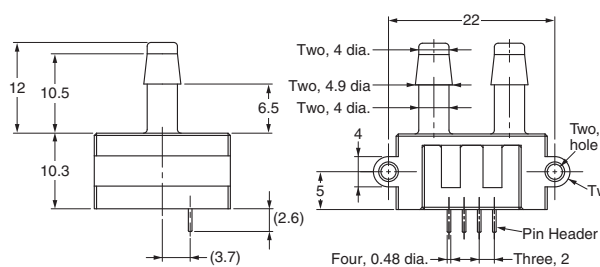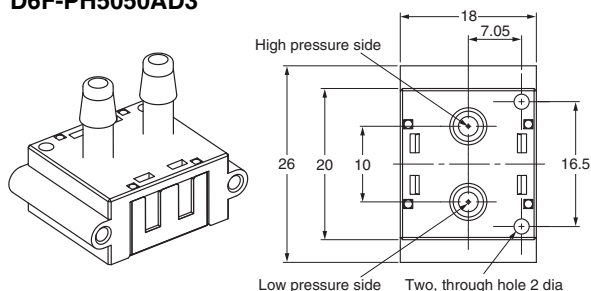

### Recommendation size for pin header installation (tolerances: $\pm 0.1$ )

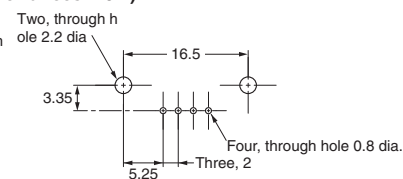

### Tubes

Install tubes made of materials such as rubber, urethane or nylon so that they will not come out.



For urethane tubes, tubes with an outer diameter of 6 mm and an inner diameter of 4 mm are recommended.

### Soldering Conditions



Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max.

## ● Connectors

D6F-PH0025AD2  
D6F-PH0505AD4  
D6F-PH5050AD4

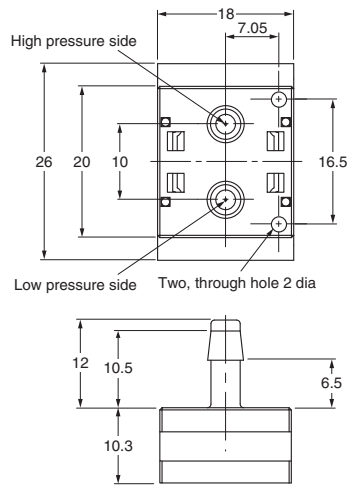

Note. Use M1.8 panhead screws or tapping screws for installation, and tighten the screws to a maximum torque of 0.36 N·m.  
Use the following connectors to connect to the Sensor.  
Connector : GHR-04V-S (made by J.S.T. Mfg. Co.)  
Terminals : SSSL-002T-P0.2 (made by J.S.T. Mfg. Co.)  
Wires AWG26 to AWG30

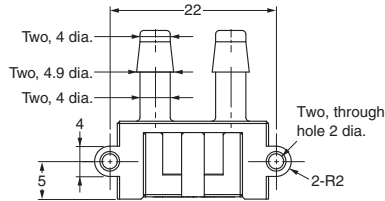



Label: Gives model and lot numbers.

CAD Data


D6F-PH0025AMD2  
D6F-PH0505AMD4  
D6F-PH5050AMD4

Note: 1. Use M3 screws (round head screws) or tapping screws as the installation screws, and tighten the screws to a maximum torque of 1.0 N·m.  
Note: 2. The outer diameter of screw heads and washers must be 6 mm or less.  
Note: 3. The sealing part of the inlet port must have a 7.0-dia. ditch and P4 O-ring. (Compliant with JIS B 2401)  
Note: 4. Use the following connectors to connect to the Sensor.  
Connector : GHR-04V-S (made by J.S.T. Mfg. Co.)  
Terminals : SSSL-002T-P0.2 (made by J.S.T. Mfg. Co.)  
Wires AWG26 to AWG30




## Recommended Installation Dimensions

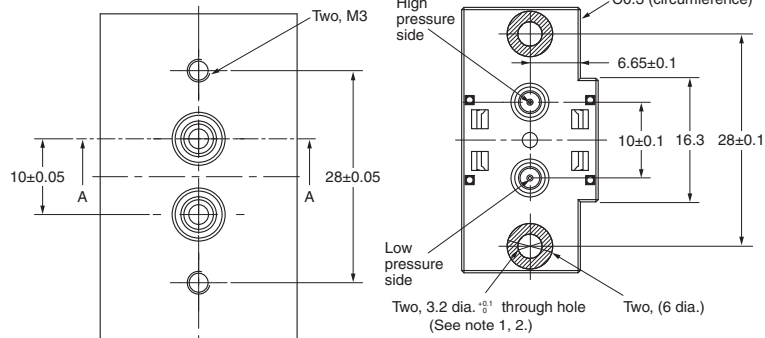


## A-A inlet port Recommended dimensions of O-ring sealing surface (See note.3)

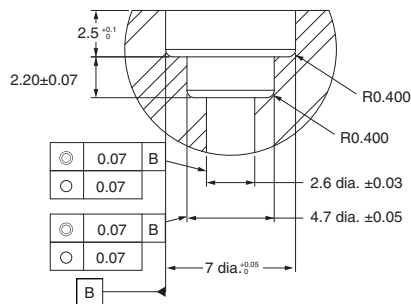

Label: Gives model and lot numbers.

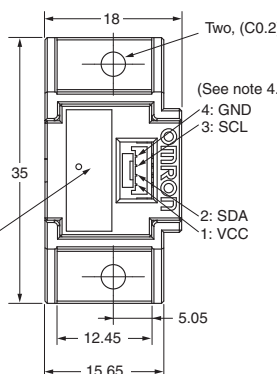


## Detailed View of B Scale 10:1

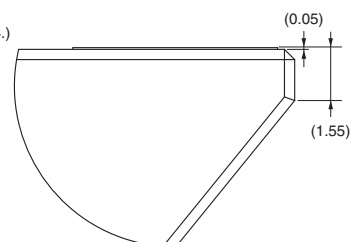

CAD Data

Electrical connection

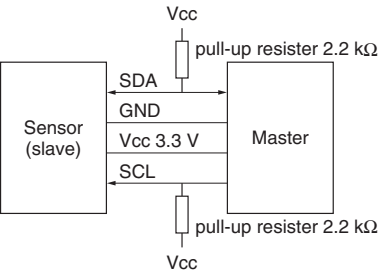

Communication

|                  |            |                         |
|------------------|------------|-------------------------|
| Serial Interface |            | I2C                     |
| Slave address    | HEX        | 0x6C                    |
|                  | BIN (7bit) | 0b110_1100              |
| Speed mode       |            | Max. 400kHz (Fast Mode) |
| Signal           | SCL        | Serial Clock            |
|                  | SDA        | Data Signal             |



# D6F-W

## MEMS Flow Sensor

### A Compact Sensor That Uses OMRON's Unique Flow Path Structure for High-Performance Flow Velocity\* Measurement.

 Air  Analog

- Anti-dust performance enhanced by OMRON's unique three-dimensional flow path structure.
- High accuracy of  $\pm 5\%$  FS.

\* The flow velocity is the value calculated from the mass flow rate in OMRON's specified wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of JAPAN.



#### RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model     |
|------------------|-----------------|-----------|
| Air              | 0 to 1 m/s      | D6F-W01A1 |
|                  | 0 to 4 m/s      | D6F-W04A1 |
|                  | 0 to 10 m/s     | D6F-W10A1 |

#### Accessory (Sold separately)

| Type  | Model         |
|-------|---------------|
| Cable | D6F-W CABLE   |
|       | D6F-W CABLE-L |


Note: Refer to *Accessories for the D6F Series* on page 38.

### Connections

#### D6F-W01A1

#### D6F-W04A1

#### D6F-W10A1

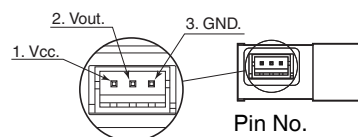

Pin No.

1: Vcc

2: Vout

3: GND

Connector

S3B-ZR-SM2-TF  
(made by J.S.T. Mfg. Co.)

Use the following connectors from J.S.T. Mfg. Co. Ltd. to connect the D6F:

Housing: ZHR-3

Contacts: SZH-002T-P0.5

Wires: AWG28 to AWG26


Or

Contacts: SZH-003T-P0.5


Wires: AWG32 to AWG28

### Output Voltage Characteristics


#### D6F-W01A1



#### D6F-W04A1



#### D6F-W10A1



#### D6F-W01A1


| Flow velocity m/s | 0              | 0.25           | 0.50           | 0.75           | 1.00           |
|-------------------|----------------|----------------|----------------|----------------|----------------|
| Output voltage V  | 1.00 $\pm$ 0.2 | 1.35 $\pm$ 0.2 | 2.01 $\pm$ 0.2 | 3.27 $\pm$ 0.2 | 5.00 $\pm$ 0.2 |

#### D6F-W04A1

| Flow velocity m/s | 0              | 1.0            | 2.0            | 3.0            | 4.0            |
|-------------------|----------------|----------------|----------------|----------------|----------------|
| Output voltage V  | 1.00 $\pm$ 0.2 | 1.58 $\pm$ 0.2 | 2.88 $\pm$ 0.2 | 4.11 $\pm$ 0.2 | 5.00 $\pm$ 0.2 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 48-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 1, below.

Figure 1: Wind Tunnel




Measurement conditions: Power supply voltage of 12 VDC, ambient temperature of 25°C, and ambient humidity of 35% to 75%.

#### D6F-W10A1

| Flow velocity m/s | 0               | 2.0             | 4.0             | 6.0             | 8.0             | 10.0            |
|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Output voltage V  | 1.00 $\pm$ 0.24 | 1.94 $\pm$ 0.24 | 3.23 $\pm$ 0.24 | 4.25 $\pm$ 0.24 | 4.73 $\pm$ 0.24 | 5.00 $\pm$ 0.24 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 155-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 2, below.

Figure 2: Wind Tunnel

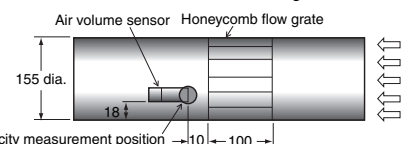

Measurement conditions: Power supply voltage of 12 VDC and ambient temperature of 25°C

## Characteristics/Performance

| Model                               | D6F-W01A1                                                                                                    | D6F-W04A1  | D6F-W10A1                    |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|------------|------------------------------|
| Flow Range (See note 1.)            | 0 to 1 m/s                                                                                                   | 0 to 4 m/s | 0 to 10 m/s                  |
| Calibration Gas (See note 2.)       | Air                                                                                                          |            |                              |
| Electrical Connection               | Three-pin connector                                                                                          |            |                              |
| Power Supply                        | 10.8 to 26.4 VDC                                                                                             |            |                              |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C                                             |            |                              |
| Output Voltage                      | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ)                                                     |            |                              |
| Accuracy                            | ±5% FS (25°C characteristic)                                                                                 |            | ±6% FS (25°C characteristic) |
| Repeatability (See note 3.)         | ±0.4% FS                                                                                                     |            |                              |
| Output Voltage (Max.)               | 5.7 VDC (Load resistance: 10 kΩ)                                                                             |            |                              |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |            |                              |
| Rated Power Supply Voltage          | 26.4 VDC                                                                                                     |            |                              |
| Rated Output Voltage                | 6 VDC                                                                                                        |            |                              |
| Case                                | PPS                                                                                                          |            |                              |
| Degree of Protection                | IEC IP40 (except for flow inlet and outlet)                                                                  |            |                              |
| Operating Temperature (See note 4.) | -10 to 60°C                                                                                                  |            |                              |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |            |                              |
| Storage Temperature (See note 4.)   | -40 to 80°C                                                                                                  |            |                              |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |            |                              |
| Temperature Characteristics         | ±5% FS for 25°C characteristic at an ambient temperature of -10 to 60°C                                      |            |                              |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |            |                              |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |            |                              |
| Weight                              | 6.3 g                                                                                                        |            |                              |

Note: 1. Volumetric flow rate at 25°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions

**CAD Data** Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)


## ● MEMS Flow Sensors

D6F-W01A1

D6F-W04A1

D6F-W10A1

**CAD Data**

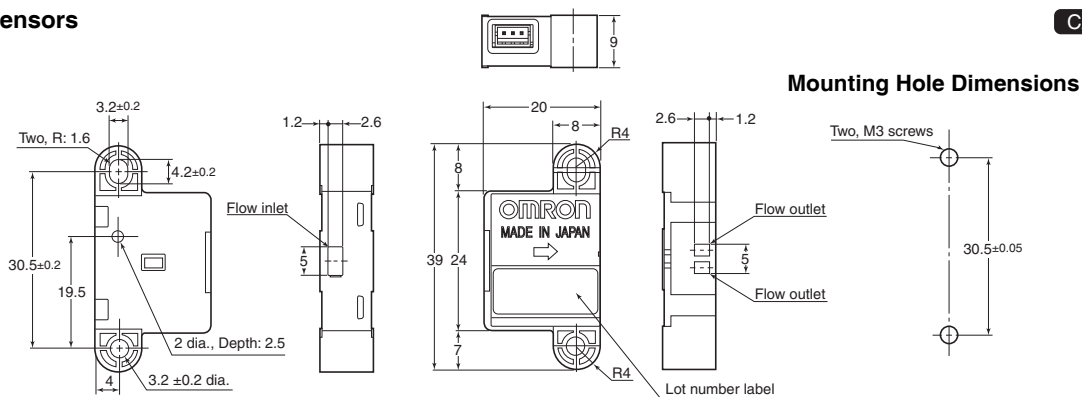


# D6F-V

## MEMS Flow Sensor

### A Compact Sensor That Uses OMRON's Unique Flow Path Structure for High-Performance Flow Velocity\* Measurement.

 Air  Analog



- Anti-dust performance enhanced by OMRON's unique three-dimensional flow path structure.
- Extremely compact, measuring only 24 × 14 × 8 mm.

\* The flow velocity is the value calculated from the mass flow rate in OMRON's specified wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of JAPAN.

#### RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 39.

### Ordering Information

#### MEMS Flow Sensor

| Applicable fluid | Flow velocity range | Model     |
|------------------|---------------------|-----------|
| Air              | 0 to 3 m/s          | D6F-V03A1 |


#### Accessory (Sold separately)

| Type  | Model        |
|-------|--------------|
| Cable | D6F-CABLE2   |
|       | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 38.

### Connections

#### D6F-V03A1



Enlarged View

Pin No. 1: Vcc  
2: Vout  
3: GND


Connector SM03B-SRSS-TB (made by J.S.T. Mfg. Co.)

Use the following connectors from J.S.T. Mfg. Co. Ltd. to connect the D6F:

- Pressure-welded Connectors
  - Socket: 03SR-3S
  - Wires: AWG30
- Or
- Crimp Connectors
  - Contact: SSH-003T-P0.2
  - Housing: SHR-03V-S
- Wires: AWG32 to AWG28

### Output Voltage Characteristics

#### D6F-V03A1




#### D6F-V03A1

| Flow velocity m/s | 0        | 0.75     | 1.5       | 2.25      | 3      |
|-------------------|----------|----------|-----------|-----------|--------|
| Output voltage V  | 0.5±0.15 | 0.7±0.15 | 1.11±0.15 | 1.58±0.15 | 2±0.15 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 48-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 1 below.

Figure 1: Wind Tunnel

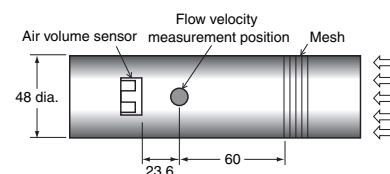

Measurement conditions: Power supply voltage of 3.3 VDC, ambient temperature of 25°C, and dry air.

## Characteristics/Performance

| Model                               | D6F-V03A1                                                                                                    |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Flow Range (See note 1.)            | 0 to 3 m/s                                                                                                   |
| Calibration Gas (See note 2.)       | Air                                                                                                          |
| Electrical Connection               | Three-pin connector                                                                                          |
| Power Supply                        | 3.15 to 3.45 VDC                                                                                             |
| Current Consumption                 | 15 mA max. with no load, with a Vcc of 3.3 VDC, and at 25°C                                                  |
| Output Voltage                      | 0.5 to 2 VDC (non-linear output, load resistance of 10 kΩ)                                                   |
| Accuracy                            | ±10% FS (25°C characteristic)                                                                                |
| Repeatability (See note 3.)         | ±1.5% FS                                                                                                     |
| Output Voltage (Max.)               | 2.7 VDC (Load resistance: 10 kΩ)                                                                             |
| Output Voltage (Min.)               | 0 VDC (Load resistance: 10 kΩ)                                                                               |
| Rated Power Supply Voltage          | 12 VDC                                                                                                       |
| Rated Output Voltage                | 3 VDC                                                                                                        |
| Case                                | PBT                                                                                                          |
| Degree of Protection                | IEC IP40 (except for flow inlet and outlet)                                                                  |
| Operating Temperature (See note 4.) | −10 to 60°C                                                                                                  |
| Operating Humidity (See note 4.)    | 35% to 85%                                                                                                   |
| Storage Temperature (See note 4.)   | −40 to 80°C                                                                                                  |
| Storage Humidity (See note 4.)      | 35% to 85%                                                                                                   |
| Temperature Characteristics         | ±20% FS for 25°C characteristic at an ambient temperature of −10 to 60°C                                     |
| Insulation Resistance               | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)                                       |
| Dielectric Strength                 | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |
| Weight                              | 5.3 g                                                                                                        |

Note: 1. Volumetric flow rate at 25°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

## Dimensions


**CAD Data** Please visit our CAD Data website, which is noted on the last page.

(Unit: mm)

### ● MEMS Flow Sensors

#### D6F-V03A1

**CAD Data**

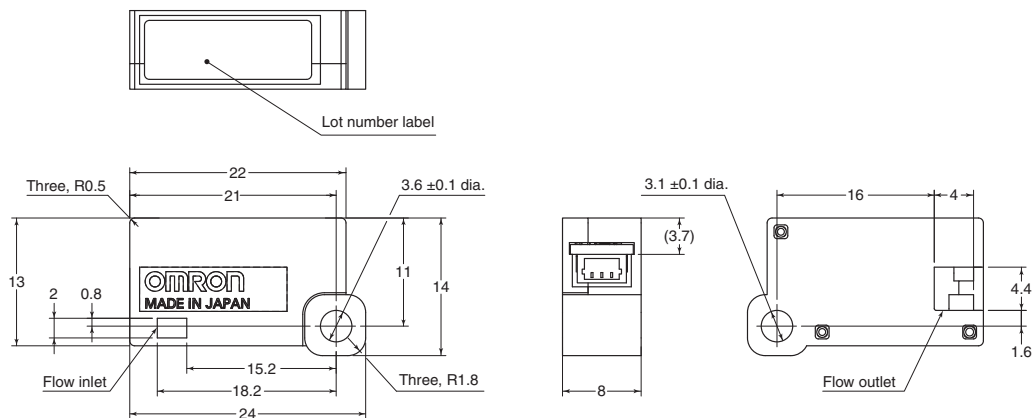



# Common Precautions for the D6F Series

## Safety Precautions

### Precautions for Correct Use

#### ● Sensor Applications

The D6F is built for use with general-purpose devices. In particular, when using the D6F for applications with the safety requirements described below, take steps to ensure system and device safety through measures such as fail-safe designs, redundant designs, and regular inspections.

- Safety devices for ensuring safety for persons
- Transportation equipment control (such as applications to stop operation)
- Aviation and space equipment
- Nuclear power equipment

Do not use the D6F for applications in which D6F operation would directly affect human life.

#### ● Fluids, Pipe Mounting and Sensor Installation

##### All D6F Models

- (1) Use clean fluids. Install a filter or mist separator on the inflow pipe. Failure to do so may result in malfunction or changes in characteristics due to dust or mist. This does not apply to the D6F-W, D6F-V, D6F-P and D6F-PH.
- (2) Do not use corrosive gases other than the specified applicable fluids (such as chlorine, sulfur, acid, or alkali). Doing so may cause product failure.
- (3) The specified performance may not be obtained if the D6F is used for fluids other than the specified applicable fluids.
- (4) After removing the Sensor from the package, do not allow foreign particles to enter the piping. Foreign particles in the piping may cause product failure.
- (5) Install the sensor so that the fluid flows in the direction indicated by the arrow on the Sensor. Correct measurements cannot be obtained if the fluid flows in the wrong direction. This does not apply to the D6F-V, D6F-P and D6F-PH.
- (6) It is recommended that the Sensor (except for the D6F-A3) be mounted horizontally. If it is not mounted horizontally, an error of  $\pm 1\%$  FS or higher may result.
- (7) Install the Sensor on a flat surface. Incorrect installation may damage the Sensor and make it impossible to obtain correct measurements.
- (8) Make sure that the power to all equipment is turned OFF before you install the Sensor. Installing the Sensor while the power supply is ON may result in electrical shock or abnormal operation.
- (9) Always check operation after installation.
- (10) Do not drop the Sensor or disassemble the cover.

##### D6F-A1

- (1) Make sure that pipes with bamboo joints are airtight. Correct measurements cannot be obtained if there is leakage from joints.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

##### D6F-N2/-L2

- (1) Use the Rc 1/4 tapped threads for the pipes, and tighten the threads to a maximum torque of 5 N•m. Tightening beyond this value may result in fractures, which can cause leaks. Apply a suitable amount of pipe sealer. Do not apply sealer on the first two threads from the end of the threaded section. When you tighten the pipes, do not allow foreign matter or oil on the joint area.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.


##### D6F-A3

- (1) When installing the pipes, use M5 screws for the joints and tighten to a torque of 1.5 N•m maximum. Use sealing tape to make the joints airtight. Incorrect installation may make it impossible to obtain correct measurements.
- (2) It is recommended that the Sensor be mounted either horizontally or vertically. Mounting the Sensor at an angle may make it impossible to obtain correct measurements.
- (3) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

##### D6F-A5

- (1) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.
- (2) Install O-rings to seal the fluid inlet and outlet points. The recommended O-ring is JIS B 2401, nominal number P5.

##### Installation Example



##### D6F-A6

- (1) Use the appropriate threads (R1/4, NPT1/8 or NPT1/2) for the pipes, and tighten the pipes to a maximum torque of 5 N•m. Tightening beyond this value may result in fractures, which can cause leaks. When you tighten the pipes, do not allow foreign matter or oil on the joint area. Use a spanner or adjustable wrench to turn the connecting section (aluminum alloy) and connect the pipe. Do not place the spanner or wrench on the Sensor (PPS). Doing so may damage the Sensor or result in leaks. Apply a suitable amount of pipe sealer. Do not apply sealer on the first two threads from the end of the threaded section. When you tighten the pipes, do not allow foreign matter or oil on the joint area.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.


# Common Precautions for the D6F Series

## D6F-A7/-L7/-N7/-A7D/-AB71/-AB71D


- (1) Use male quick couplings for the piping, and secure them with the applicable quick fasteners.
- (2) Do not apply excessive force to the adapter section when connecting the pipes. If strong force is applied to the connected pipes, or if strong force is applied directly to the adapter section while holding the Sensor, it may damage the Sensor or cause leakage.

### Installation Example

Use male, P10-type quick-connect joints for the D6F-A7/-L7/-N7/-A7D and P14-type quick-connect joints for the D6F-AB71/-AB71D.

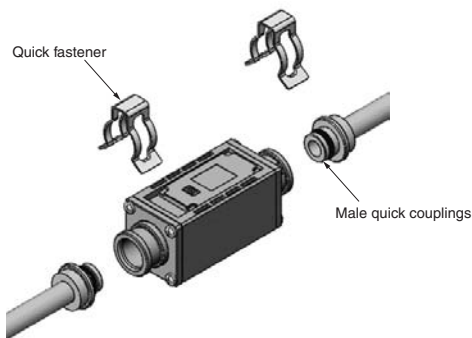

### Applicable male quick coupling dimensions (Unit: mm)

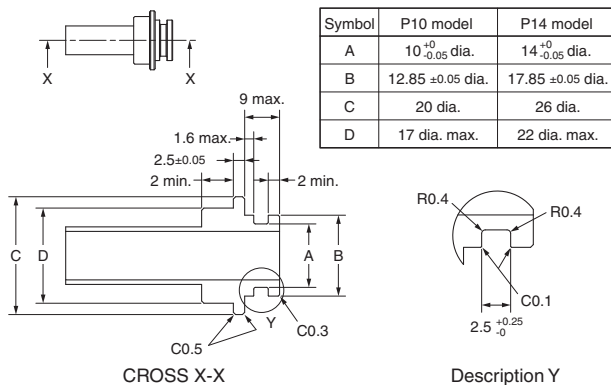

Note. There is a possibility that leak damage or faulty of the body occurs when static load of more than 40 N is applied to 300 mm from the center of product as fulcrum point.


## D6F-P0001A1/-P0010A1/-P0010A2

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the positive side (+) to the negative side (-). Refer to the figure on page 26 for the installation direction.
- (3) For PCB-mounting Sensors, perform terminal soldering only after the Sensor is secured into place on the PCB. Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max. (This applies only to PCB-mounting Sensors.)
- (4) Use M2.6 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.59 N•m.

## D6F-P0010AM2

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the positive side (+) to the negative side (-). Install the Sensor with the manifold facing downward. Refer to the figure on page 26 for the installation direction.
- (3) Use M3 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.59 N•m.
- (4) Install O-rings to seal the fluid inlet and outlet points. The recommended O-ring is JIS B 2401, nominal number P4.

### Installation Example

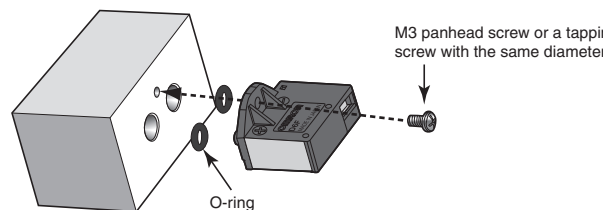

## D6F-PHAD1/-PHAD2/-PHAD3/-PHAD4

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the high pressure side (+) to the low pressure side (-).
- (3) Use M1.8 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.36 N•m.
- (4) The sensor output is affected with the length of a tube. The error is less than 1% with a tube (ID:4mm) length up to 800mm.
- (5) Connection (D6F-PHAD1/-PHAD3)
  - Wire with the correct terminal names and polarities. Incorrect wiring will cause failure of internal components.
  - Do not use flow soldering.
  - Please solder after fixed on the circuit board by screw.
  - Use a soldering iron:
    - Soldering condition Pressure Max.100gf
    - Temperature 350 degree C
    - Time Max. 5s



# Common Precautions for the D6F Series

## D6F-PHAMD2/-PHAMD4

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the high pressure side (+) to the low pressure side (-).
- (3) Use M3 screws (round head screws) to install the Sensor, and tighten them to a maximum torque of 1.0 N•m. The outer diameter of screw heads and washers must be 6 mm or less. Check that the Sensor is securely fastened by the screws.
- (4) Seal the sealing part of the inlet port with an O-ring. The recommended O-ring is JIS B 2401, nominal number P4.


## D6F-W

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

## D6F-V

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.
- (3) This Sensor does not contain any protective circuits. Never allow the electrical load to exceed the maximum ratings. Doing so may damage the circuits. Install protective circuits if required.
- (4) Mount the Sensor so that the flow inlet side (the side with the logo) is perpendicular to the windward side and ensure that the flow inlet and flow outlet are not blocked in any way. If the Sensor is not mounted correctly, accurate measurements cannot be made.

### Installation Example



## ● Operating Environment

Do not use the Sensor in the following locations:

- Locations directly subject to heat radiated from heating equipment
- Locations subject to water or oil
- Locations subject to direct sunlight
- Locations subject to intense temperature changes
- Locations subject to icing or condensation
- Locations subject to excessive vibration or shock

## ● Countermeasures against Noise

Noise may make it impossible to obtain correct measurements. Consider the following countermeasures.

- Allow as much space as possible between the Sensor and devices that generates high frequencies (such as high-frequency welders and high-frequency sewing machines) or surges.
- Attach surge absorbers or noise filters to noise-generating devices that are near the Sensor (in particular, equipment with inductance, such as motors, transformers, solenoids, and magnetic coils).  
(It also helps to separate pipes and ducts, and to use shielded cables.)

## ● Power Supply

- Force of connector terminal is 20 N max. Do not add strength more than tension of wire bending to connector at wiring. Install the connector coaxially to the fitting axis with holding all wires. And pulling angle should be within 15 degrees.
- Use the applicable connectors. Directly soldering the connection terminals will cause product failure. (except for the D6F-PH)
- Check the terminal names and polarity and wire the power supply correctly. Incorrect wiring will cause failure of internal components.
- When using a commercially available switching regulator, ground the FG (frame ground) and G (ground) terminals.

## ● Handling

The sensor is a precision device, and if large shock and load is applied, it may cause a failure or characteristic change. Do not drop it, disassemble it, or apply force to the terminals more than necessary. And please do not use dropped product.

- The sensor shall only be handled in electrostatic discharge protected areas (EPA) under protected and controlled conditions

## RoHS Directive

The RoHS mark is displayed on the packing of products for which the six substances banned by the RoHS Directive have been abolished (both in processing and in the electronic components mounted to the PCBs).

\* RoHS marking may be terminated if it is later determined that parts that were previously treated as RoHS compliant are not compliant due to circumstances at the supplier of the parts.

## ● RoHS Compliance Criteria

The following standards are used to determine RoHS compliance for the six banned substances.

(Items to which the RoHS Directive is not applicable are not given.)

- Lead: 1,000 ppm max.
- Hexavalent chromium: 1,000 ppm max.
- Mercury: 1,000 ppm max.
- PBB: 1,000 ppm max.
- Cadmium: 100 ppm max.
- PBDE: 1,000 ppm max.



For correct way of use, please check respective User's Manuals below.

- 1) MEMS Flow Sensor D6F Series User's Manual (Manual No. A286-E1)
- 2) MEMS Flow Sensor D6F-A7D/-AB71D User's Manual (Manual No. A302-E1)
- 3) MEMS Flow Sensor D6F-P User's Manual (Manual No. A299-E1)
- 4) MEMS Flow Sensor D6F-W/D6F-V User's Manual (Manual No. A300-E1)
- 5) MEMS Flow Sensor D6F-PH User's Manual (Manual No. A288-E1)

Please check each region's Terms & Conditions by region website.

---

## OMRON Corporation

Electronic and Mechanical Components Company

### Regional Contact

#### Americas

<https://www.components.omron.com/>

#### Asia-Pacific

<https://ecb.omron.com.sg/>

#### Korea

<https://www.omron-ecb.co.kr/>

#### Europe

<http://components.omron.eu/>

#### China

<https://www.ecb.omron.com.cn/>

#### Japan

<https://www.omron.co.jp/ecb/>