

SENCITY® Rail Antenna

K702021

Properties

- Railway rooftop antenna for 410 to 470 MHz
- Rugged design, meets EN 50155 Railway Standard
- Fire retardant according to EN 45545-2
- Contains a heavy-duty fiberglass radome
- Works also on non-metallic surfaces

**Electrical bands**

	Band 1
Frequency	410 MHz ... 470 MHz
Impedance	50 Ω
VSWR	1.5
Gain	4 dBi
Ambient Temperature	25 °C

Electrical remarks

Remarks	Indicated VSWR values are valid for a metallic ground plane of 0.5M x 0.5M or larger. Indicated Gain dBi values are valid for a metallic ground plane of 1.0M x 1.0M or larger. Gain dBd 0 (ref. to the quarter-wave antenna) on a conductive surface with a minimum size of 0.5 x 0.5M or larger.
---------	--

Ports

	Port 1
Port name	Tetra
Connector	N, jack (female)
Polarization	vertical
DC grounded	Yes

Connections

	Port 1
Port name	Tetra
Band 1	✓

SENCITY® Rail Antenna

K702021

Mechanical data	
Weight	0.5 kg
Dimensions	142 mm x 145 mm x 80 mm (Height x Width x Depth)
Remarks	Packaging size (outside): 151 x 87 x 210 mm
	Radiator and Flange: Aluminum
	Sealing: Neoprene and rubber.
This antenna, tested by an independent institute, is DC grounded to protect against lightning and short circuit by high voltage lines.	


Interface and material data	
Radome material	Fiberglass
Radome colour	Grey
Back plate/base plate material	Aluminium
Back plate/base plate colour	Black

Environmental data	
Operation temperature	-55 °C ... 85 °C
Storage temperature	-55 °C ... 85 °C
Environment (application)	Outdoor
Ingress protection (IP Rating)	Mated / IP66
Flammability rating	EN 45545-2

Environmental remarks	
Environmental tests: EN 50155:2007	
Flammability rating: EN 45545	

SENCITY® Rail Antenna
K702021

Outline drawing

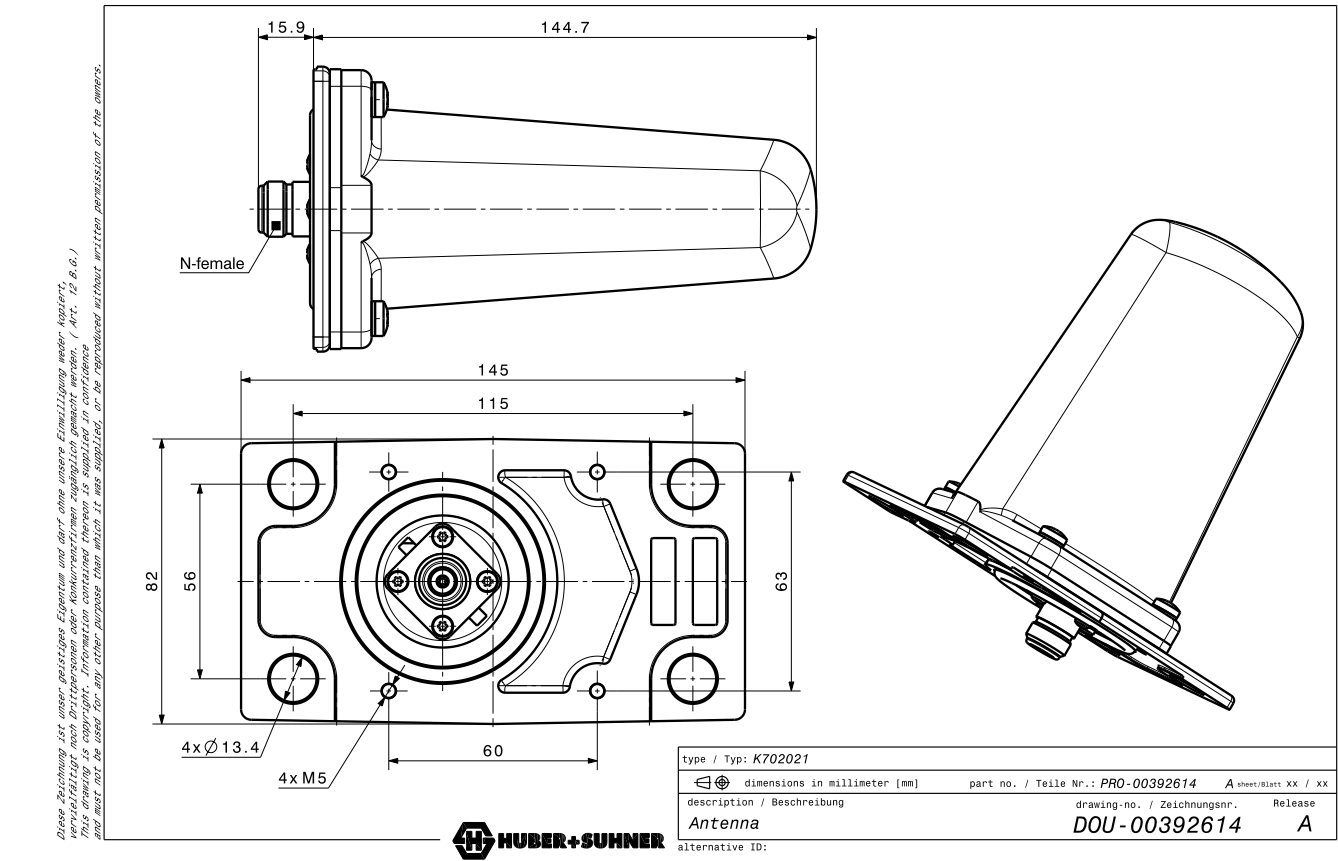

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P1031 / Date of publication: 12.08.2024 / uncontrolled copy