




NOTES:


1. ROHS COMPLIANT
2. STORAGE TEMPERATURE: -20°C TO +125°C
3. COMPLIANCE TO J-STD:
  - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
4. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX  
TO THE PART NUMBER(i.e T6003NL BECOMES T6003NLT).



FINAL OUTLINE

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (02/18/16)

| PRODUCT DESCRIPTION     | TLA DRAWING | PS DRAWING    | SHEET  | PART NO. | DATASHEET REV. |
|-------------------------|-------------|---------------|--------|----------|----------------|
| XFMR,SGL,AUD,EP13S,235C | T6003NL-12  | PS-2279.001-A | 1 OF 3 | T6003NL  | A              |







SCHEMATIC

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

| PARAMETER                                     | SPECIFICATIONS                                                      |
|-----------------------------------------------|---------------------------------------------------------------------|
| OPERATING TEMPERATURE                         | 0°C ~ 70°C                                                          |
| POLARITY                                      | PER SCHEMATIC                                                       |
| TURNS RATIO<br>@ 1 KHz, 1 VRMS                | $\frac{(2-4)}{(9-7)} = 1.0 \pm 2\%$                                 |
| INDUCTANCE (OCL)<br>@ 200 Hz, 1 VRMS, .1 mADC | (2-4) = 1.5 H MINIMUM                                               |
| DC RESISTANCE                                 | (2-4) = 55 OHMS MAXIMUM<br>(9-7) = 70 OHMS MAXIMUM                  |
| LEAKAGE INDUCTANCE<br>@ 1 KHz, 1 VRMS         | (2-4) WITH (9-7) SHORTED = 2 mH MAXIMUM                             |
| CWW<br>@ 1 KHz, 1 VRMS                        | (2-4) TO (9-7) = 30 pF MAXIMUM.                                     |
| HIPOT                                         | (2,4) TO (7,9) = 1500 VRMS FOR 1 MINUTE, OR 1650 VRMS FOR 6 SECONDS |

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (02/18/16)

| PRODUCT DESCRIPTION     | TLA DRAWING | PS DRAWING    | SHEET  | PART NO. | DATASHEET REV. |
|-------------------------|-------------|---------------|--------|----------|----------------|
| XFMR,SGL,AUD,EP13S,235C | T6003NL-12  | PS-2279.001-A | 2 OF 3 | T6003NL  | A              |

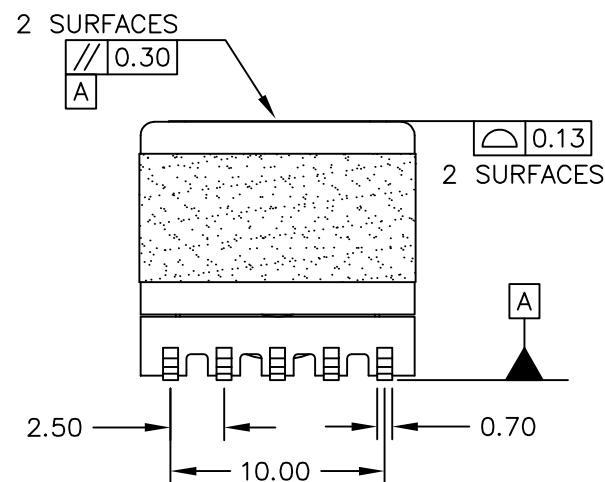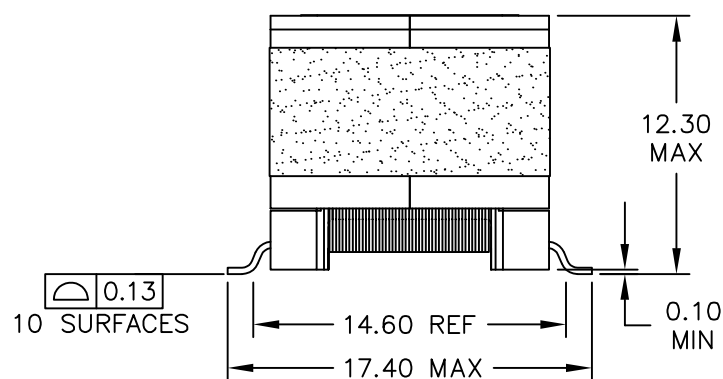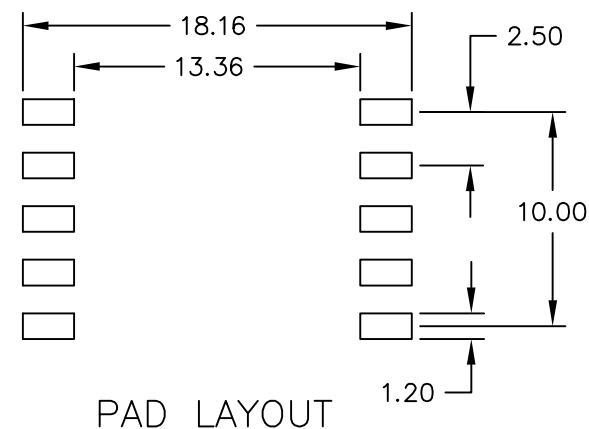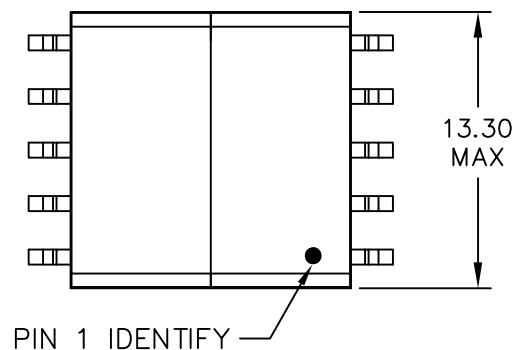

DIMENSIONS ARE IN MM WITH THE FOLLOWING  
TOLERANCES:  $\pm 0.10$

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (02/18/16)

| PRODUCT DESCRIPTION     | TLA DRAWING | PS DRAWING    | SHEET  | PART NO. | DATASHEET REV. |
|-------------------------|-------------|---------------|--------|----------|----------------|
| XFMR,SGL,AUD,EP13S,235C | T6003NL-12  | PS-2279.001-A | 3 OF 3 | T6003NL  | A              |