



Features:

- 60W Compact plastic Din Rail mount PSU
- Wide AC & DC Input 85V to 264VAC, 120-370VDC
- Temperature range -40°C to +70°C
- Output Range: 5V - 24VDC
- Low Standby Power 0.4W
- Low ripple & noise
- Fully Isolated Input - Output >4000Vrms
- Over Voltage Class III (EN61558-1)
- Safety: Class II
- Materials: UL94-V0
- IEC/EN/UL62368, EN61558
- 3 Year Warranty



Description

VTX-211-060-2## is a plastic enclosed Din Rail mountable AC-DC power supply . It features a wide input range accepting either AC or DC voltage, high efficiency, low power consumption and CLASS II reinforced insulation. The products offer a high level of stability and immunity to noise, compliant with international IEC62368 standards for EMC and safety sepecifitions meet IEC/EN61000-4, CISPR32, EN55032, UL62368, IEC62368 and EN62368. These light weight AC-DC converters also have an extremely compact design for space saving and are ideal for applications such as industrial control equipment machinery and all kinds of applications in a harsh environment.

Selection Guide

Part Number	Power Rating Watts	Output Voltage (VDC)	Output Current (Amp)	Output Voltage Adj. (V)	Ambient Temp. (°C)	Efficiency Typical	Capacitive Load (uF)
VTX-211-060-205	32.5	5	6.5	4.9 ~ 5.5	70°C	>84%	20000
VTX-211-060-212	54	12	4.5	10.0 ~ 13.8			10000
VTX-211-060-215	60	15	6.5	13.5 ~ 18.0			8000
VTX-211-060-224	60	24	2.5	21.6 ~ 29.0			4000
VTX-211-060-248	60	48	1.25	43.2 ~ 55.2			680

Note: Other output voltages are available upon request.

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Input Specification					
Item	Conditions	Min	Typical	Max	Unit
Input Voltage	AC Input	85	-	264	VAC
	DC Input	120	-	370	VDC
Input Frequency		47	-	63	Hz
Input Current	115VAC	-	-	1.2	A
	230VAC	-	-	0.8	
Inrush Curent	115VAC	-	30	-	
	230VAC	-	60	-	
Leakage Current		0.25mA RMS Max			

Output Specification					
Item	Conditions	Min	Typical	Max	Unit
Output Voltage	10% - 100% Load	-	+/-2	-	%
Line Regulation	Full Load	-	+/-0.5	-	
Load Regulation	10% - 100% Load	-	+/-1.5	-	
Ripple / Noise 20MHz Bandwidth (Peak to Peak Value)	5V	-	-	100	mV
	12V	-	-	120	
	15V	-	-	120	
	24V	-	-	150	
Stand by Power	230VAC	-	0.30	0.4	W
Temp. Coefficient		-	+/-0.02	-	%/°C
Short Circuit Protection		Hiccup, Continuous, Self-recovery			
Over Current Protection		>120 Load, Self-recovery			
Minimum Load		0	-	-	%
Hold-up Time	230VAC Input	-	80	-	mS

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

General Specification					
Item	Conditions	Min	Typical	Max	Unit
Dielectric Strength	Input to Output (1Min, 5mA)	4000	-	-	VAC
Insulation Resistance	Input to Output (500VDC)	100			M.Ohm
Operating Temperture		-40	-	+70	°C
Storage Temperture		-40	-	+85	
Storage Humidity		-	-	+95	%RH
Switching Frequency		-	65	-	KHz
Safety Class		CLASS II			
MTBF		>300KHrs @ 25°C (MIL-HDBK-217F)			
Safety Approvals		UL62368, IEC62368-1 EN61558, EN62368			
Cooling Method		Free air convection			
Dimensions		92.66 x 52.00 x 58.00mm			
Weight		175g			

EMC Specification		
Emissions	CE /RE	CISPR32 / EN55032 CLASS B EN55014-1
Immunity	ESD	IEC/EN 61000-4-2 CONTACT +/-6KV EN55014-2
	RS	IEC/EN 61000-4-3 10V/m EN55014-2
	EFT	IEC/EN 61000-4-4
	SURGE	IEC/EN 61000-4-5, EN55014-2
	CS	IEC/EN 61000-4-6 10V/r.m.s. EN55014-2
	Voltage Variation	IEC/EN 61000-4-11, EN55014-2


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited


Vigortronix.com

Derating Graphs



Temperature Derating Graph

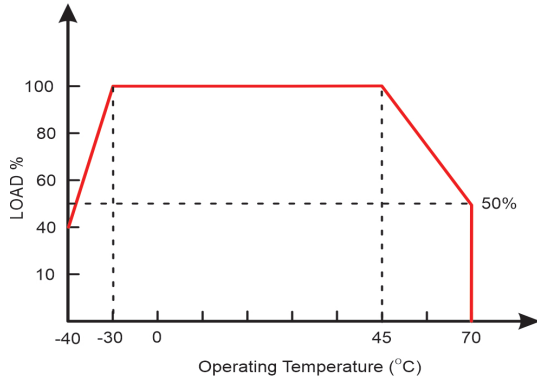

Input Voltage Derating Graph

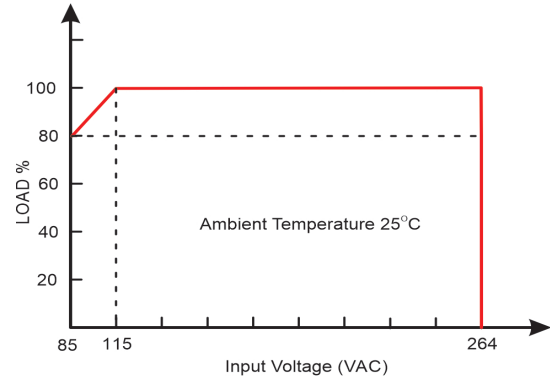

Dimensions

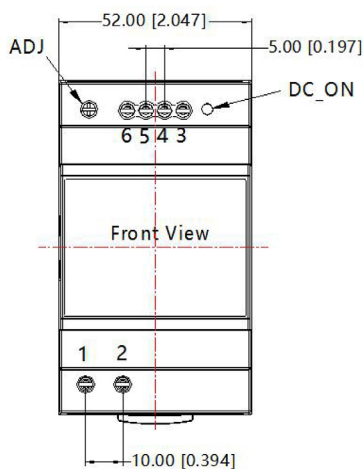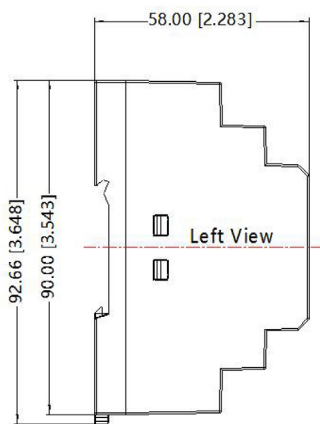

Pin-Out	
Pin	
1	AC(L)
2	AC(N)
3	+Vo
4	+Vo
5	-Vo
6	-Vo

Note:

Unit: mm[inch]

ADJ: adjustable resistance to change output voltage

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N·m

Mounting rail: TS35

General tolerances: $\pm 1.00 [\pm 0.039]$

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com