

Relay Interface Modules 8 - 10 - 16 A



Control panels



Carousel
warehouses



Medical and
dentistry



Shipyards



Elevators
and lifts






Panels for electrical
distribution



Building
automation



Hoists and cranes

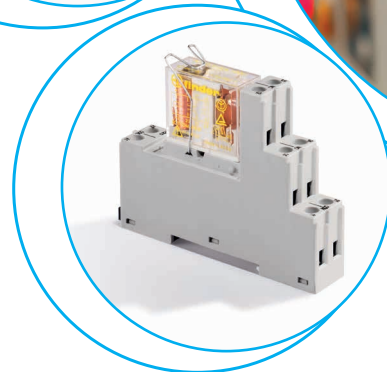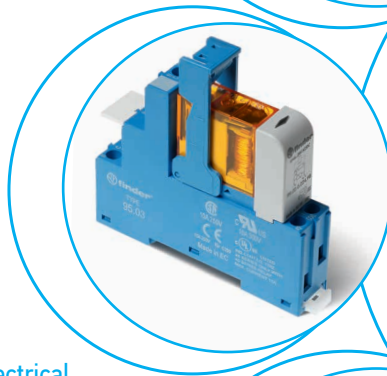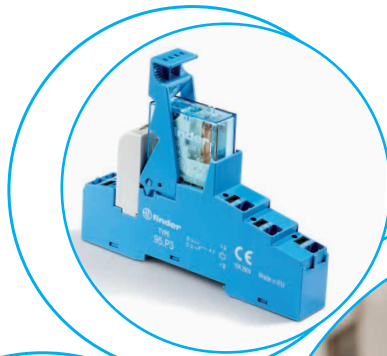

**2 CO relay interface modules,
15.8 mm wide**

Type 48.12 and 48.P2

Ideal for safety applications

- 2 CO 8 A
- Relay with forcibly guided contacts according to EN 61810-3 Type B (previously EN 50205)

Type 48.32

Ideal for energy applications

- 2 CO 8 A
- Breaking capacity DC inductive (L/R=40 ms)
 - 110 V = 0.5 A
 - 220 V = 0.2 A
- Screw terminals
- DC coils
- Identification label
- UL Listing (certain relay / socket combinations)
- 35 mm rail (EN 60715) mounting
- Cadmium-free contact material

48.12/32

Screw terminal



48.P2

Push-in terminal



According to EN 61810-3 only 1 NO and 1 NC (11-14 and 21-22 or 11-12 and 21-24) shall be used as forcibly guided contacts (Type 48.12/P2).

For outline drawing see page 11

Contact specification

Contact configuration		2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	8/15	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2000	2000
Rated load AC15 (230 V AC)	VA	500	500
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	8/0.65/0.4	8/0.65/0.4
Minimum switching load	mW (V/mA)	50 (5/5)	50 (5/5)
Standard contact material		AgNi+Au	AgNi+Au



Coil specification

Nominal voltage (U _N)	V DC	12 - 24	24
Rated power DC	W	0.7	0.7
Operating range	DC	(0.75...1.2)U _N	(0.75...1.2)U _N
Holding voltage	DC	0.4 U _N	0.4 U _N
Must drop-out voltage	DC	0.1 U _N	0.1 U _N

Technical data

Mechanical life DC	cycles	10 · 10 ⁶	10 · 10 ⁶
Electrical life at rated load AC1	cycles	100 · 10 ³	100 · 10 ³
Operate/release time	ms	10/4	10/4
Insulation between coil and contacts (1.2/50 μs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1500	1500
Ambient temperature range	°C	-40...+70	-40...+70
Protection category		IP 20	IP 20

Approvals relay (according to type)



**1 CO relay interface modules,
15.8 mm wide**
Ideal interface for PLC and electronic systems
Type 48.P3

- 1 CO 10 A
- Push-in terminals


Type 48.31

- 1 CO 10 A
- Screw terminals


- AC coils or DC sensitive coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting
- Cadmium-free contact material

48.P3
Push-in terminal



48.31
Screw terminal

48.P3


- 1 CO 10 A
- Push-in terminals

48.31


- 1 CO 10 A
- Screw terminals



For outline drawing see page 11

Contact specification

		1 CO (SPDT)	1 CO (SPDT)
Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	10/20	10/20
Rated voltage/Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2500	2500
Rated load AC15 (230 V AC)	VA	500	500
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	10/0.3/0.12	10/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi

Coil specification

Nominal voltage (U_N)	V AC (50/60 Hz)	12 - 24 - 110 - 120 - 230	12 - 24 - 110 - 120 - 230
	V DC	12 - 24 - 125	12 - 24 - 125
Rated power AC/sens. DC	VA (50 Hz)/W	1.2/0.5	1.2/0.5
Operating range	AC	$(0.8 \dots 1.1) U_N$	$(0.8 \dots 1.1) U_N$
	sens. DC	$(0.73 \dots 1.5) U_N$	$(0.73 \dots 1.5) U_N$
Holding voltage	AC/DC	$0.8 U_N / 0.4 U_N$	$0.8 U_N / 0.4 U_N$
Must drop-out voltage	AC/DC	$0.2 U_N / 0.1 U_N$	$0.2 U_N / 0.1 U_N$

Technical data

Mechanical life	cycles	$10 \cdot 10^6$	$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$200 \cdot 10^3$	$200 \cdot 10^3$
Operate/release time	ms	7/4 (AC) - 12/12 (DC)	7/4 (AC) - 12/12 (DC)
Insulation between coil and contacts (1.2/50 μ s)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+70	-40...+70
Protection category		IP 20	IP 20

Approvals relay (according to type)


2 CO relay interface modules, 15.8 mm wide

Ideal interface for PLC and electronic systems

Type 48.P5

- 2 CO 8 A
- Push-in terminals

Type 48.52

- 2 CO 8 A
- Screw terminals

- AC coils or DC sensitive coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting
- Cadmium-free contact material

48.P5

Push-in terminal



48.52

Screw terminal



For outline drawing see page 11

Contact specification

Contact configuration

2 CO (DPDT)

2 CO (DPDT)

Rated current/Maximum peak current A

8/15

8/15

Rated voltage/Maximum switching voltage V AC

250/400

250/400

Rated load AC1 VA

2000

2000

Rated load AC15 (230 V AC) VA

400

400

Single phase motor rating (230 V AC) kW

0.3

0.3

Breaking capacity DC1: 30/110/220 V A

8/0.3/0.12

8/0.3/0.12

Minimum switching load mW (V/mA)

300 (5/5)

300 (5/5)

Standard contact material

AgNi

AgNi

Coil specification

Nominal voltage (U_N) V AC (50/60 Hz)

12 - 24 - 110 - 120 - 230

12 - 24 - 110 - 120 - 230

V DC

12 - 24 - 125

12 - 24 - 125

Rated power AC/sens. DC VA (50 Hz)/W

1.2/0.5

1.2/0.5

Operating range AC

$(0.8 \dots 1.1) U_N$

$(0.8 \dots 1.1) U_N$

sens. DC

$(0.73 \dots 1.5) U_N$

$(0.73 \dots 1.5) U_N$

Holding voltage AC/DC

$0.8 U_N / 0.4 U_N$

$0.8 U_N / 0.4 U_N$

Must drop-out voltage AC/DC

$0.2 U_N / 0.1 U_N$

$0.2 U_N / 0.1 U_N$

Technical data

Mechanical life cycles

$10 \cdot 10^6$

$10 \cdot 10^6$

Electrical life at rated load AC1 cycles

$100 \cdot 10^3$

$100 \cdot 10^3$

Operate/release time ms

7/4 (AC) - 12/12 (DC)

7/4 (AC) - 12/12 (DC)

Insulation between coil and contacts (1.2/50 μ s) kV

6 (8 mm)

6 (8 mm)

Dielectric strength between open contacts V AC

1000

1000

Ambient temperature range °C

-40...+70


-40...+70

Protection category



IP 20

IP 20


Approvals relay (according to type)



- 2 CO 8 A
- Push-in terminals



- 2 CO 8 A
- Screw terminals



**1 CO relay interface modules,
15.8 mm wide**
Ideal interface for PLC and electronic systems
Type 48.P6

- 1 CO 16 A
- Push-in terminals

Type 48.61

- 1 CO 16 A
- Screw terminals
- AC coils or DC sensitive coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting
- Cadmium-free contact material available

48.P6

Push-in terminal



48.61

Screw terminal



For outline drawing see page 11

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16*/30	16*/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	4000	4000
Rated load AC15 (230 V AC)	VA	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55
Breaking capacity DC1: 30/110/220 V	A	16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)
Standard contact material		AgCdO	AgCdO


Coil specification

Nominal voltage (U_N)	V AC (50/60 Hz)	12 - 24 - 110 - 120 - 230	12 - 24 - 110 - 120 - 230
	V DC	12 - 24 - 125	12 - 24 - 125
Rated power AC/sens. DC	VA (50 Hz)/W	1.2/0.5	1.2/0.5
Operating range	AC	$(0.8 \dots 1.1) U_N$	$(0.8 \dots 1.1) U_N$
	sens. DC	$(0.8 \dots 1.5) U_N$	$(0.8 \dots 1.5) U_N$
Holding voltage	AC/DC	$0.8 U_N / 0.4 U_N$	$0.8 U_N / 0.4 U_N$
Must drop-out voltage	AC/DC	$0.2 U_N / 0.1 U_N$	$0.2 U_N / 0.1 U_N$


Technical data

Mechanical life	cycles	$10 \cdot 10^6$	$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$100 \cdot 10^3$	$100 \cdot 10^3$
Operate/release time	ms	7/4 (AC) - 12/12 (DC)	7/4 (AC) - 12/12 (DC)
Insulation between coil and contacts (1.2/50 μ s)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+70	-40...+70
Protection category		IP 20	IP 20


Approvals relay (according to type)

48.P6



- 1 CO 16 A
- Push-in terminals



* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

48.61


- 1 CO 16 A
- Screw terminals



* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

2 CO relay interface modules, 15.8 mm wide

Ideal interface for PLC and electronic systems

Type 48.P8

- 2 CO 10 A
- Push-in terminals

Type 48.62

- 2 CO 10 A
- Screw terminals
- DC sensitive coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting
- Cadmium-free contact material

48.P8
Push-in terminal



48.62
Screw terminal



For outline drawing see page 11

Contact specification

Contact configuration		2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	10/20	10/20
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2500	2500
Rated load AC15 (230 V AC)	VA	750	750
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	10/0.6/0.25	10/0.6/0.25
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi

Coil specification

Nominal voltage (U_N)	V AC (50/60 Hz)	—	—
	V DC	12 - 24 - 125	12 - 24 - 125
Rated power AC/sens. DC	VA (50 Hz)/W	—/0.5	—/0.5
Operating range	AC	—	—
	sens. DC	$(0.8 \dots 1.5) U_N$	$(0.8 \dots 1.5) U_N$
Holding voltage	AC/DC	—/0.4 U_N	—/0.4 U_N
Must drop-out voltage	AC/DC	—/0.1 U_N	—/0.1 U_N


Technical data

Mechanical life	cycles	$10 \cdot 10^6$	$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$100 \cdot 10^3$	$100 \cdot 10^3$
Operate/release time	ms	12/12 (DC)	12/12 (DC)
Insulation between coil and contacts (1.2/50 μ s)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+70	-40...+70
Protection category		IP 20	IP 20


Approvals relay (according to type)




48.P8




- 2 CO 10 A
- Push-in terminals



48.62



- 2 CO 10 A
- Screw terminals



Ordering information

Example: 48 series, 35 mm rail (EN 60715) mount, Push-in terminal relay interface module, 2 CO 8 A contacts, 24 V sensitive DC coil, green LED + diode, 99.02 coil indication.

B

Series

Type

Screw terminal

- 1 = 35 mm rail (EN 60715) mount, forcibly guided contacts relay
- 3 = 35 mm rail (EN 60715) mount
- 5 = 35 mm rail (EN 60715) mount
- 6 = 35 mm rail (EN 60715) mount
- Push-in terminal
- P = 35 mm rail (EN 60715) mount

Type

Screw terminal

- 1 = for 48.31, 1 pole, 10 A
- 48.61, 1 pole, 16 A
- 2 = for 48.12/48.32 (DC only), 48.52, 2 poles, 8 A
- 48.62 (DC only), 2 poles, 10 A

Push-in terminal

- 2 = for 48.P2 (DC only), 2 pole, 8 A
- 3 = for 48.P3, 1 pole, 10 A
- 5 = for 48.P5, 2 pole, 8 A
- 6 = for 48.P6, 1 pole, 16 A
- 8 = for 48.P8 (DC only), 2 pole, 10 A

Coil version

- 7 = Sensitive DC
- 8 = AC (50/60 Hz)
- 9 = DC (for 48.12/48.P2 only)

Coil voltage

See coil specifications

A B C D

4 8 . P 5 . 7 . 0 2 4 . 0 0 5 0

A: Contact material

- 0 = Standard AgNi for 48.P3/P5/P8/31/52/62
- AgCdO, Standard for 48.P6/61
- 4 = AgSnO₂, for 48.P6/P8/61/62 only
- 5 = AgNi + Au, for 48.12/P2 and 48.P3/P5/31/52 only
- Standard for 48.32

B: Contact circuit

- 0 = CO (nPDT)

D: Special versions

- 0 = Standard
- 7 = Standard (for 48.12/48.P2 only)

C: Options

- 0 = Standard (for 48.12/48.P2 only)
- 5 = Standard for DC: green LED + diode (polarity +A1)
- 6 = Standard for AC and 48.32: green LED + Varistor

Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
48.12/48.P2	DC	5	0	0	7
48.32	DC	5	0	6	0
48.P3/P5/31/52	AC	0 - 5	0	6	0
48.P3/P5/31/52	Sensitive DC	0 - 5	0	5	0
48.P6/61	AC	0 - 4	0	6	0
48.P6/61	Sensitive DC	0 - 4	0	5	0
48.P8/62	Sensitive DC	0 - 4	0	5	0


Technical data

Insulation		48.12/P2/31/32/61/P3/P6	48.52/P5	48.12/31/61/62/P3/P6/P8
Insulation according to EN 61810-1	insulation rated voltage	V 250	250	400
	rated impulse withstand voltage	kV 4	4	4
	pollution degree	3	2	2
	overvoltage category	III	III	III
Insulation between coil and contacts (1.2/50 µs)		kV 6 (8 mm)		
Dielectric strength between open contacts		V AC 1000; 1500 (48.12/P2/32)		
Dielectric strength between adjacent contacts		V AC 2000 (48.P5/52); 2500 (48.P8/62) 3000 (48.12/P2/32)		
Insulation between coil terminals				
Rated impulse voltage (surge) differential mode (according to EN 61000-4-5)		kV (1.2/50 µs) 2		
Other data				
Bounce time: NO/NC		ms 2/5; 2/10 (48.12/P2/32)		
Vibration resistance (10...200)Hz: NO/NC		g 20/5 (for 1 pole)	15/3; 20/6 (48.12/P2/32) for 2 pole	
Power lost to the environment	without contact current	W 0.7		
	with rated current	W 1.2 (48.12/P2/31/32/P3)	2 (48.52/P5/61/62/P6/P8)	
Wire strip length		mm 8		
Screw torque (only for 48.12/31/32/52/61/81)		Nm 0.5		
Min. wire size	Screw terminal		Push-in terminal	
		solid cable stranded cable	solid cable stranded cable	
	mm ²	0.5 0.5	0.5 0.5	
	AWG	21 21	21 21	
Max. wire size	Screw terminal		Push-in terminal	
		solid cable stranded cable	solid cable stranded cable	
	mm ²	1 x 6 / 2 x 2.5 1 x 4 / 2 x 2.5	2 x 1.5 / 1 x 2.5 2 x 1.5 / 1 x 2.5	
	AWG	1 x 10 / 2 x 14 1 x 12 / 2 x 14	2 x 16 / 1 x 14 2 x 16 / 1 x 14	

Contact specification


F 48 - Electrical life (AC) v contact current

Types 48.P3/P6/31/61

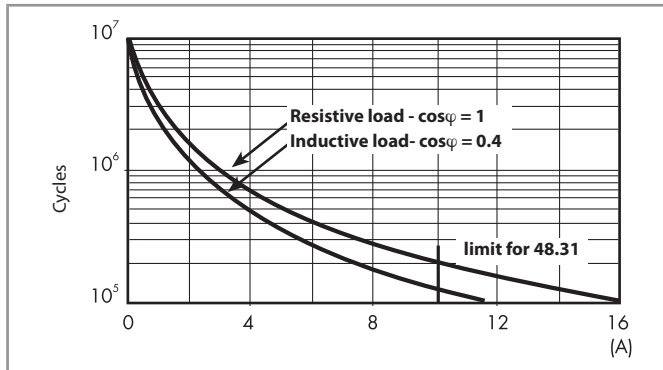


F 48 - Electrical life (AC) v contact current

Types 48.P8/62

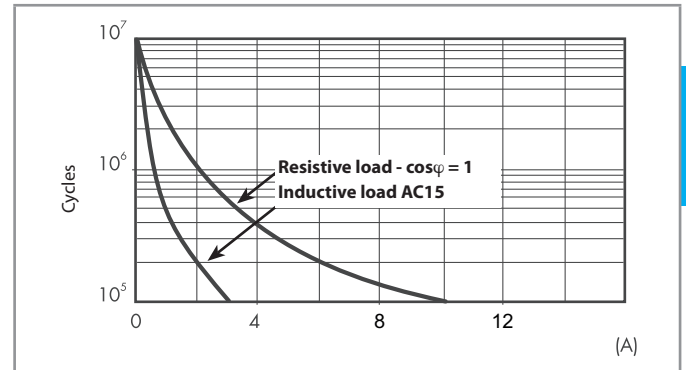


F 48 - Electrical life (AC) v contact current

Types 48.P5/52

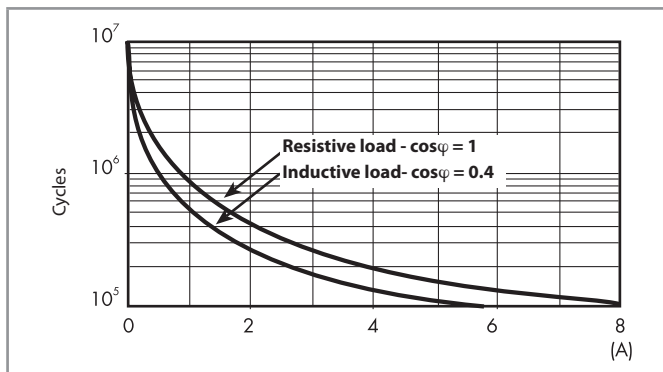


F 48 - Electrical life (AC) v contact current

Type 48.12/P2/32

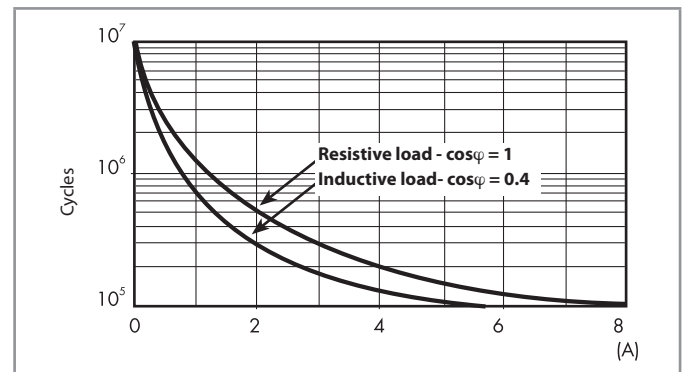


H 48 - Maximum DC1 breaking capacity

Types 48.P3/P5/P6/31/52/61

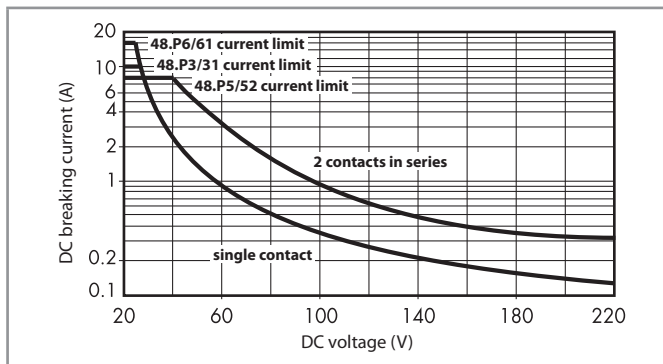


H 48 - Maximum DC1 breaking capacity

Types 48.P8/62

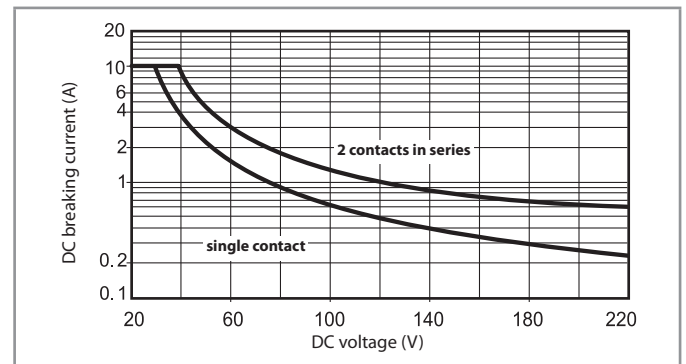

H 48 - Maximum DC1 breaking capacity

Type 48.12/P2/32

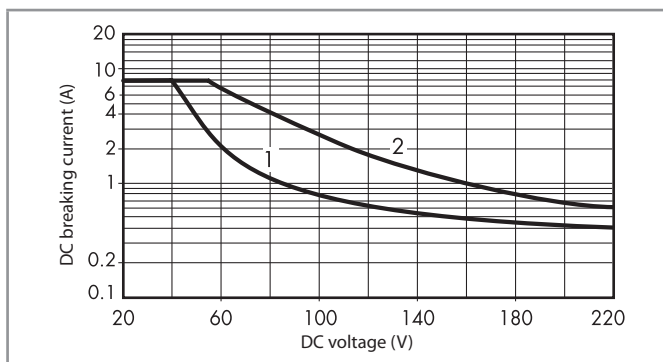

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
 - In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
- Note: the release time for the load will be increased.

Coil specifications

DC coil data (0.5 W sensitive)

Nominal voltage U_N	Coil code	Operating range		Rated coil consumption I at U_N
V		U_{min}^* V	U_{max} V	mA
12	7.012	8.8	18	41
24	7.024	17.5	36	22.2
125	7.125	91	188	4

* $U_{min} = 0.8 U_N$ for 48.61, 48.62, 48.P6, 48.P8


AC coil data

Nominal voltage U_N	Coil code	Operating range		Rated coil consumption I at U_N (50 Hz)
V		U_{min} V	U_{max} V	mA
12	8.012	9.6	13.2	90.5
24	8.024	19.2	26.4	46
110	8.110	88	121	10.1
120	8.120	96	132	11.8
230	8.230	184	253	7.0

DC coil data, (0.7 W standard) - Type 48.12/48.P2/48.32,
(48.32 available only 24 V DC)


Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
V		U_{min} V	U_{max} V	Ω	mA
12	9.012	9	14.4	205	58.5
24	9.024	18	28.8	820	29.3

R 48 - DC coil operating range v ambient temperature

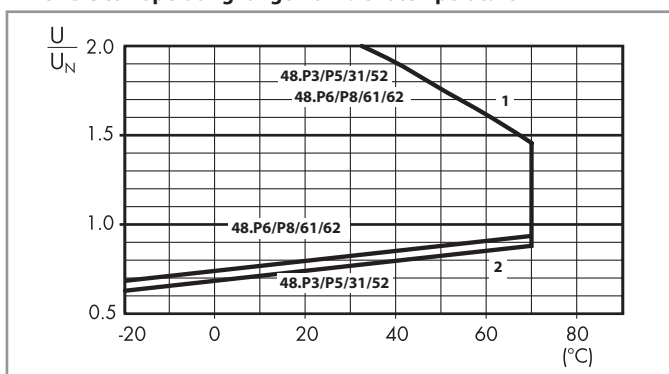


- 1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

R 48 - AC coil operating range v ambient temperature

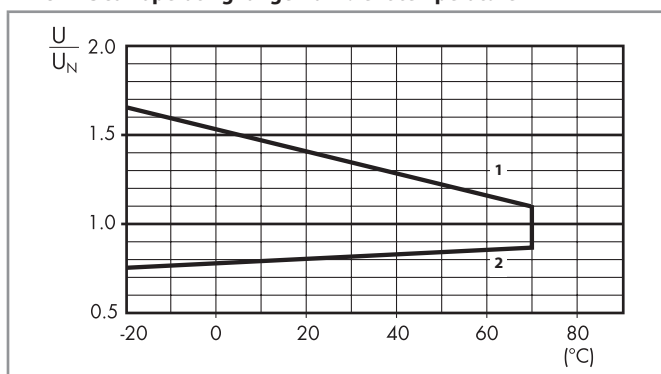

- 1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

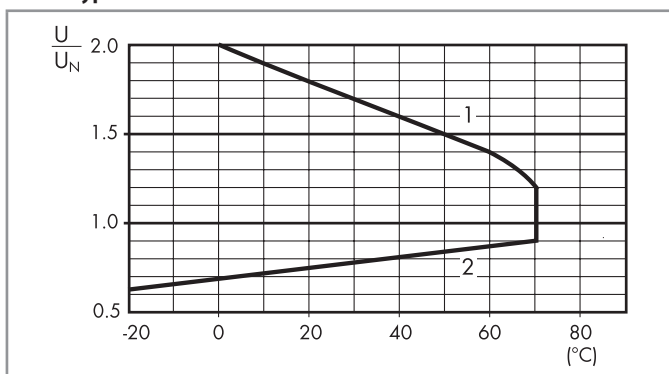R 48 - DC coil operating range v ambient temperature
Type 48.12/P2/32


- 1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

Combinations

Code	Type of socket	Type of relay	Module	Retaining clip
48.12	95.05.7	50.12	—	095.71
48.P2	95.P5.7	50.12	—	095.71
48.32	95.05	50.12	99.02	095.01
48.31	95.03	40.31	99.02	095.01
48.52	95.05	40.52	99.02	095.01
48.61	95.05	40.61	99.02	095.01
48.62	95.05	40.62	99.02	095.01
48.P3	95.P3	40.31	99.02	095.91.3
48.P5	95.P5	40.52	99.02	095.91.3
48.P6	95.P5	40.61	99.02	095.91.3
48.P8	95.P5	40.62	99.02	095.91.3


B

Outline drawings

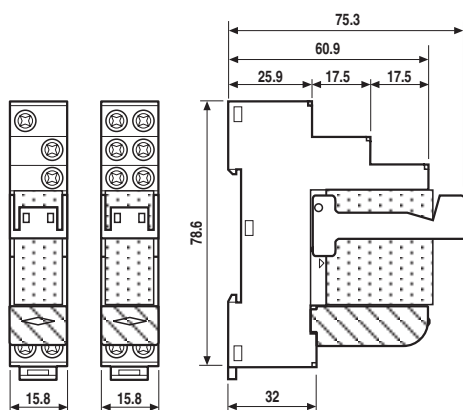


Types 48.31 48.32 / 48.52 / 48.61 / 48.62

Screw terminal

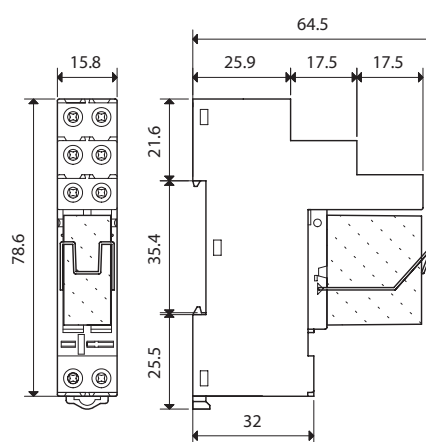

Type 48.12

Screw terminal

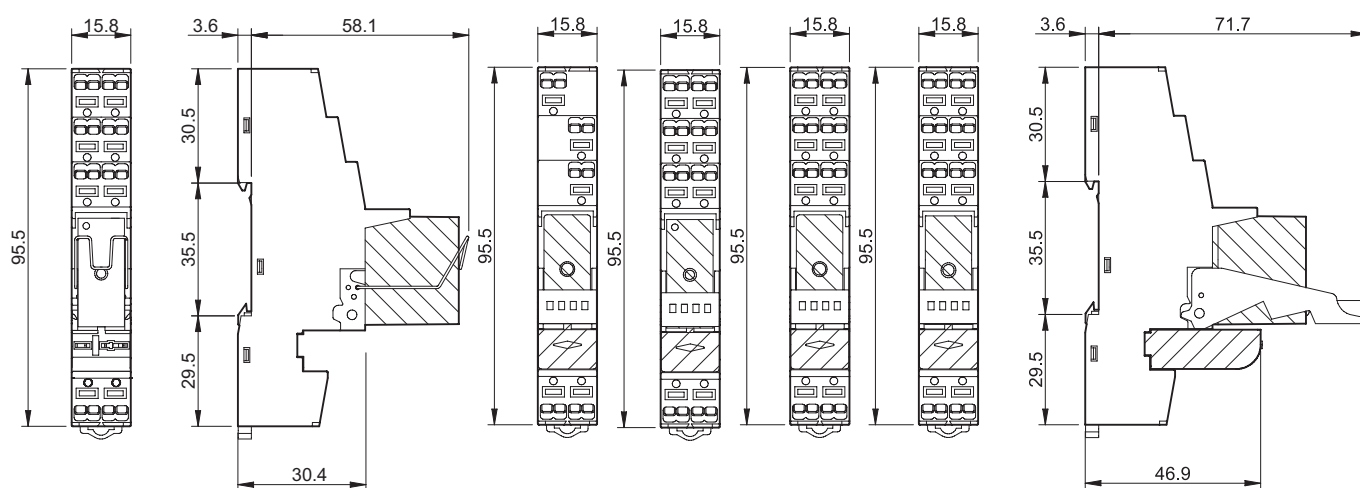

Types 48.P2

Push-in terminal



48.P3

48.P5

48.P6

48.P8

Push-in terminal



Accessories




097.58

8-way jumper link for type 48.P3/P5/P6/P8

097.58

Rated values

10 A - 250 V

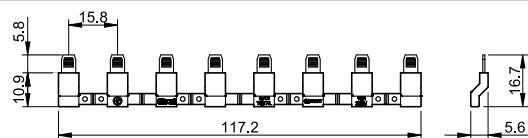


097.52

2-way jumper link for type 48.P3/P5/P6/P8

097.52

Rated values

10 A - 250 V




097.42

2-way jumper link for type 48.P3/P5/P6/P8

097.42

Rated values


10 A - 250 V



097.00

Marker tag holder for type 48.P3/P5/P6/P8 and 48.12/31/32/52/61/62

097.00



095.18



8-way jumper link for screw terminal version

095.18 (blue)

095.18.0 (black)

Rated values

10 A - 250 V



060.48

Sheet of marker tags (CEMBRE Thermal transfer printers), plastic,
48 tags, 6 x 12 mm

060.48

Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

4	8	.	P	5	.	7	.	0	2	4	.	0	0	5	0	S	P	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

A Standard packaging
B Blister packaging

SP Plastic retaining clip