

Product data sheet

Specifications



Timing Relay, Type JCK, plug In,
on delay, adjustable time, 0.6 to 60
seconds, 10A, 240 VAC, 24 VAC/
DC

9050JCK13V14

Main

Product range	9050JCK
Product type	Timer
Timing mode	On-delay
Timing range	0.6...60 s
Supply voltage	24 V AC/DC

Complementary

Power consumption	2 VA
Current rating	10 A
Switch function	DPDT
Contact composition	2 NO + 2 NC
Contact material	Silver nickel
Maximum switching voltage	240 V AC
Mounting type	Socket
Number of pins	8
Shape of pins	Tubular
For use with	8501NR52 8501NR51

Environment

Certifications	UL recognized UL listed CE
Ambient temperature range - operational	-18...150 °F (-28...66 °C)
Height	2.40 in (61 mm)
Width	1.69 in (43 mm)
Depth	4.09 in (104 mm)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Weight	4.32 oz (122.47 g)
Package 1 Height	1.90 in (4.826 cm)
Package 1 width	2.60 in (6.604 cm)
Package 1 Length	4.30 in (10.922 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

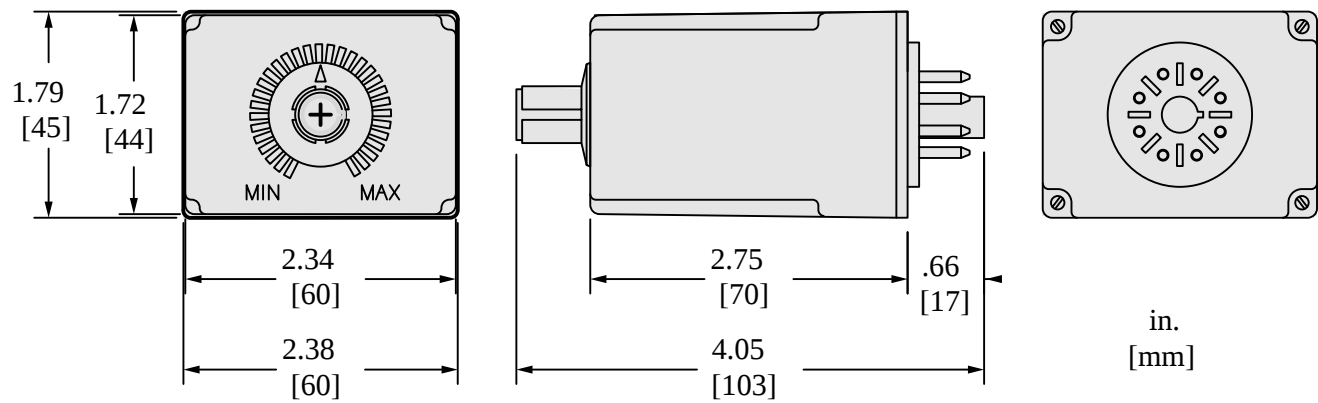

All dimensions are approximate. Also see technical documentation.

Wiring Diagram

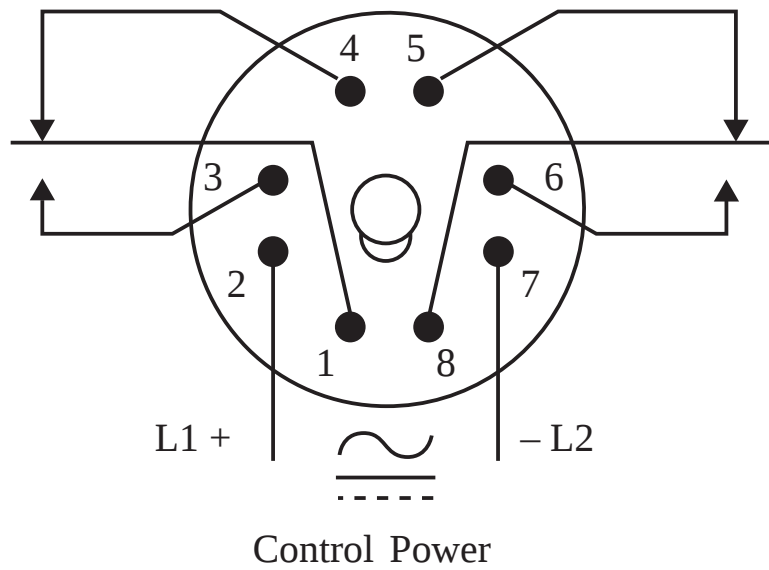

JCK 11 – JCK19
JCK31 – JCK39
JCK51 – JCK59
JCK60