


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/25/2021	GUTTADAURO

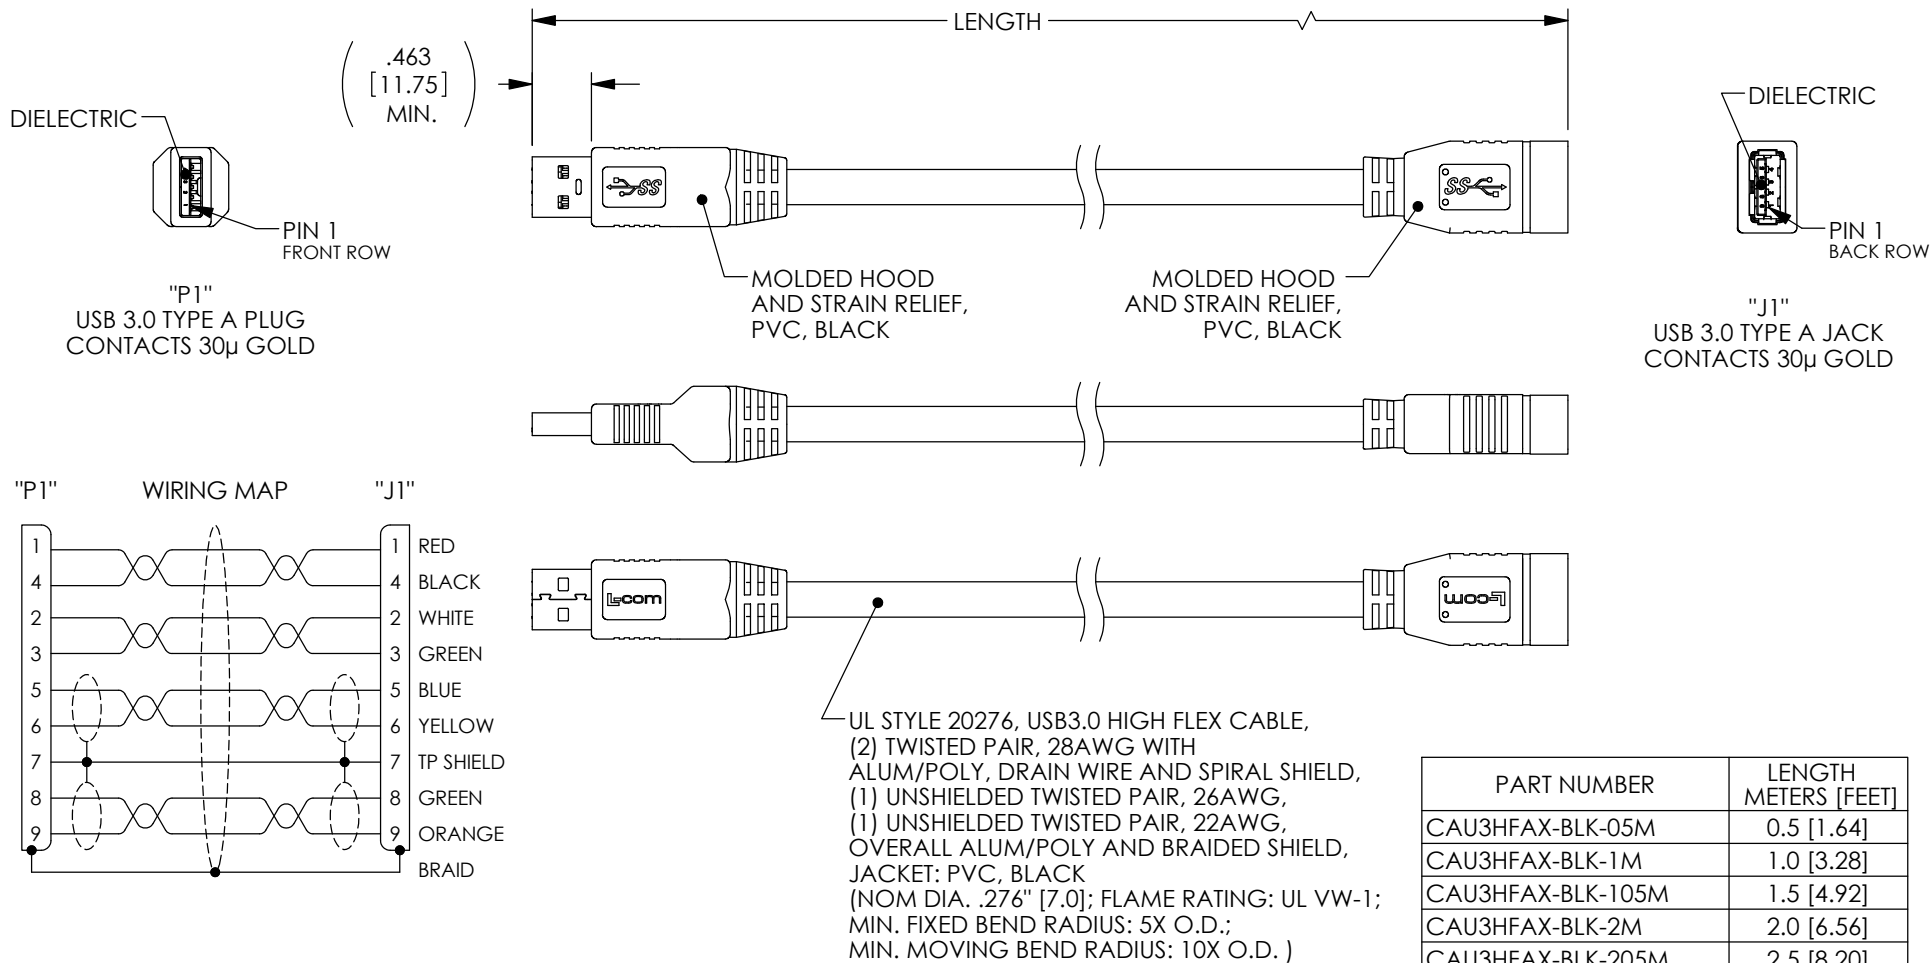

PART NUMBER	LENGTH METERS [FEET]
CAU3HFAX-BLK-05M	0.5 [1.64]
CAU3HFAX-BLK-1M	1.0 [3.28]
CAU3HFAX-BLK-105M	1.5 [4.92]
CAU3HFAX-BLK-2M	2.0 [6.56]
CAU3HFAX-BLK-205M	2.5 [8.20]

NOTES:

- CABLE TYPE-U DRAG CHAIN TESTING: 5 MILLION CYCLES MIN. (75mm BEND RADIUS)
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 3.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITO® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY SLI		12/09/2020			
≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		CHECKED BY GUITADAURO		12/09/2020			
ALL OTHER DIMENSIONAL TOLERANCES:		APPROVED BY GUITADAURO		12/09/2020			
.X = ± .2 [5] .XX = ± .02 [.5] .XXX = ± .005 [.13]		FRACTIONS ± 1/32 ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321	
				DWG. NO. CAU3HFAX-BLK		REV. A	
				SCALE: NONE		CAD FILE: CAU3HFAX-BLK.SLDDRW	
						SHEET 1 OF 1	