

32.768kHz SMD LOW PROFILE CRYSTAL

ABS05

ABS05



RoHS/RoHS II compliant

1.6 x 1.0 x 0.5mm

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- 0.5mm height ideal for high density circuit boards
- Ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications

APPLICATIONS:

- Smart Display Credit Cards
- Wide range in communication & measuring equipment
- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency	32.768			kHz	
Operation Mode	Flexural Mode (Tuning Fork)				
Operating Temperature	-40		+85	°C	
Storage Temperature	-55		+125	°C	
Frequency Tolerance @+25°C	-20		+20	ppm	Standard (See options if other than STD)
Temperature Coefficient:	-0.04	-0.03	-0.02	ppm/T ²	
Turn-over temperature:	+20	+25	+30	°C	
Equivalent series resistance (ESR)			90	kΩ	
Shunt capacitance (C0)		1.3		pF	
Load capacitance	12.5			pF	Standard (See options if other than STD)
Drive Level			0.5	μW	
Aging @ +25°C±3°C	-3		+3	ppm	First Year
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ABS05 – 32.768 kHz - - -

Load Capacitance
Blank: 12.5pF
9: 9pF
7: 7pF
6: 6pF
Contact Abracon for non-standard capacitance

Frequency Tolerance
Blank: ±20ppm
1: ±10ppm*
4: ±30ppm
*Contact Abracon for availability

Packaging
Blank: Bulk
T: Tape & Reel (3000pcs/reel)
T5: Tape & Reel (5000pcs/reel)

ABS05

ABS05




RoHS/RoHS II compliant


1.6 x 1.0 x 0.5mm

➤ OUTLINE DRAWING:


Mechanical Dimensions

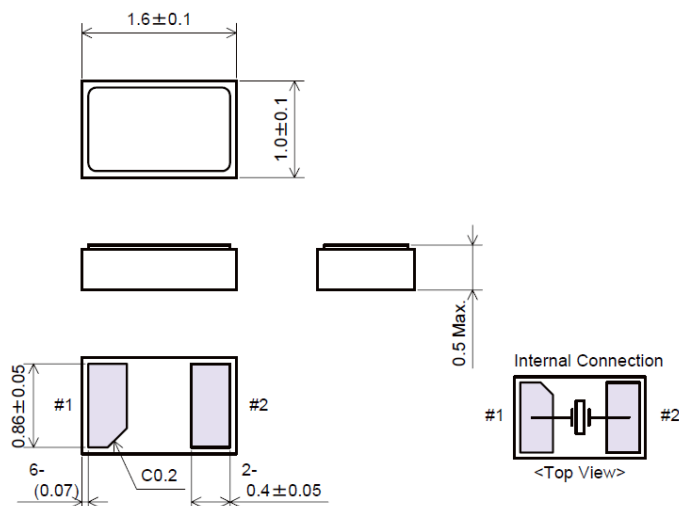

Alternative Mechanical Dimensions #1

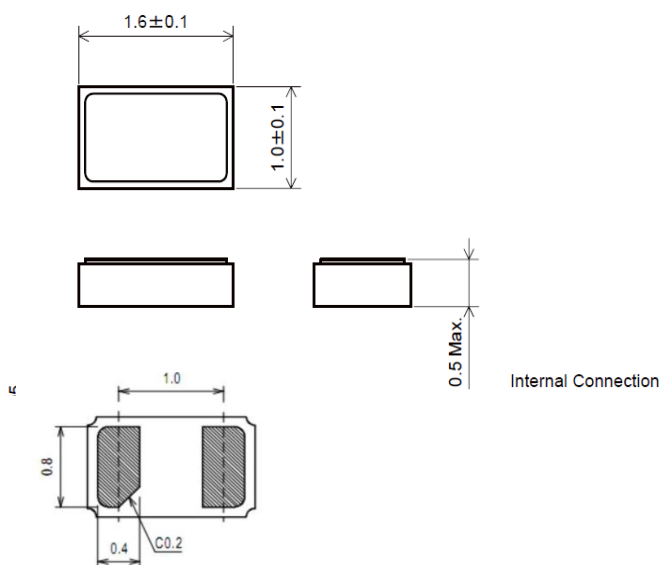


Recommended land pattern



Dimensions: mm


▷ TAPE & REEL:

T=Tape and reel (3,000pcs/reel)

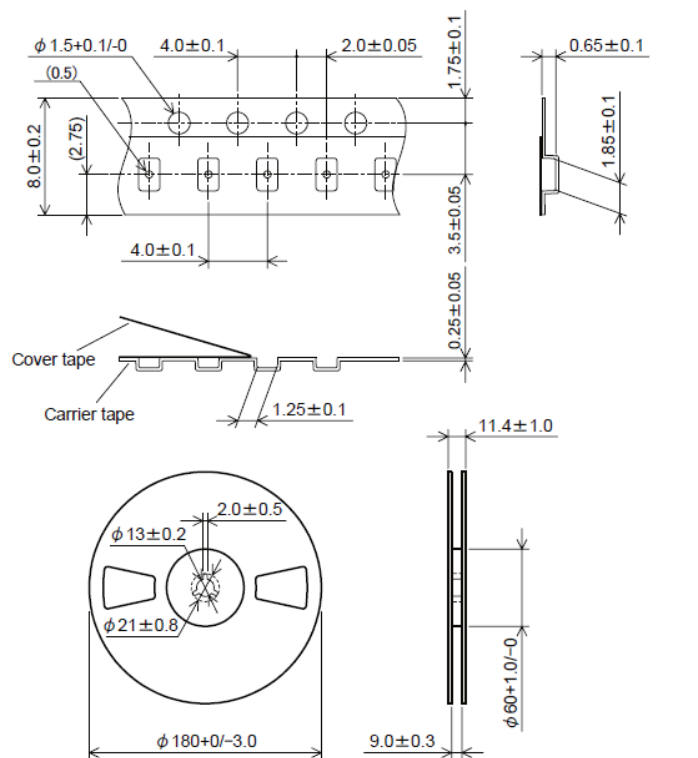

Dimensions: mm

REFLOW PROFILE:

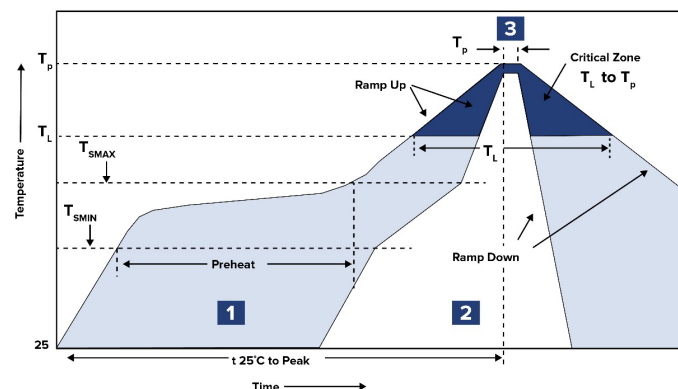

Zone	Description	Temperature	Time
1	Preheat	$T_{\text{SMIN}} \sim T_{\text{SMAX}}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_L 230°C	30 ~ 40 sec.
3	Peak heat	T_P 260°C±5°C	10 sec. MAX

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information