



Overview

VISUAL SIGNALS - INDUSTRIAL - LED TRAFFIC LIGHT BEACONS

The LED Traffic Light has been designed for industrial & commercial signalling applications where a low maintenance, long life and a cost effective solution is required. The TL system is suitable for car park management, factory traffic control, automated gate and door control systems for both indoor & outdoor applications.

They can be surface mounted onto any flat vertical surface and used as a stand-alone module. Alternatively, the modular design of the traffic light allows for multiple units to be pre-assembled by the installer to create a multiple indication light system. Each unit comes supplied as standard with all components required for multiple assembly for surface mount installation.

All colour modules incorporate a jumper link on the PCB that allows the unit to flash once energised. Cable termination is inside the enclosure and can be accessed via either the 2 x M20 conduit knockouts (top or bottom) or 1 x M20 rear conduit entry.

Features

- Continuously rated
- Flashing or Static
- Blue or White colour options available
- Multiple modular construction option
- Low current consumption
- Suitable for surface or wall mounting
- 120° light output around the horizontal axis
- Available in 12vAC/DC, 24vAC/DC, 48vAC/DC and 115/230vAC/DC

Material

- UV Stable Polycarbonate Lens & Shroud
- UV Stable ABS Plastic Base

IP 65

 36 SMT LED

 60 or 120 FPM*

 -25 to +55°C

 50/60Hz

*Flashes Per Minute

APPROVALS & CONFORMITIES



✉ uksales@moflash.co.uk
moflashkm@moflash.com
exportsales@moflash.co.uk

📍 11 Upper Conybere Street
 Highgate, Birmingham
 B12 0EB, England

🌐 www.moflash.com

☎ UK +44(0)121 446 5322
 FR +33(0)1 70 72 12 71

Ordering Information

Voltage		Ordering Information			Mode & Current Consumption		
Nominal Voltage	Voltage Range	Amber	Red	Green	Flashing @60FPM	Flashing @120FPM	Static
12vAC/DC	8-20vAC/DC	LED-TL-01-01	LED-TL-01-02	LED-TL-01-04	94mA @12vDC	89mA @12vDC	158mA @12vDC
24vAC/DC	20-30vAC/DC	LED-TL-02-01	LED-TL-02-02	LED-TL-02-04	70mA @24vDC	67mA @24vDC	120mA @24vDC
48vAC/DC	35-85vAC/DC	LED-TL-03-01	LED-TL-03-02	LED-TL-03-04	43mA @48vDC	42mA @48vDC	76mA @48vDC
115-230vAC/DC	85-280vAC/DC	LED-TL-05-01	LED-TL-05-02	LED-TL-05-04	24mA @230vAC	25mA @230vAC	28mA @230vAC

Effective Candela (Cd) - Formula Blondel-Rey

Amber	Red	Green
131.28	147.19	122.05

Weights & Dimensional Drawings



Kg	12v	24v	48v	115-230v
Net Weight	0.190	0.190	0.218	0.220
Gross Weight	0.290	0.290	0.318	0.320

2 Knockout Plain Holes
4,5mm x 50.8mm PCD

2 Knockout Slots
4,5mm wide, CSK
55mm PCD

2 Knockout Plain Holes
4,5mm x 60mm PCD

Rear knockout 20mm

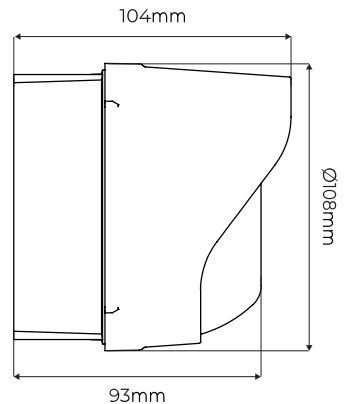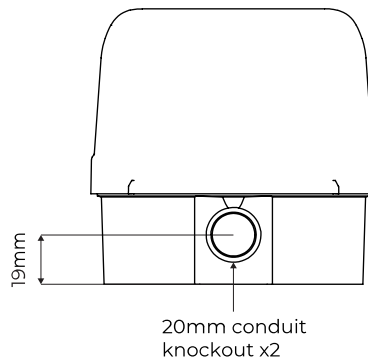

Accessories

Part Code	Description
50124	Single Mounting Bracket with Glands
50125	Double Mounting Bracket with Glands
50126	Triple Mounting Bracket with Glands



50124



50125



50126

APPROVALS & CONFORMITIES

