


Data Sheet ^{1.)}

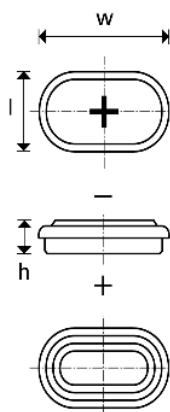

Type Number:	55615
System:	Nickel Metal Hydride/ KOH Electrolyte
Nominal Voltage [V]:	1.2
Nominal Capacity C [mAh]:	140
Typical Capacity C [mAh]: at 28 mA / 1.00 V	150
Weight, approx. [g]	6
Dimensions [mm]:	min. max.
Length [l]:	13.9 14.1
Width Facing [w]:	25.4 25.6
Height [h]:	5.6 5.85
UL Recognition:	MH 13654 (N)
Coding:	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)
Temperature Ranges [°C]	min. max.
Storage: less than 30 days	-40 65
Discharge:	-20 65
Charge:	0 65
Charging Method:	
Normal Charging:	14 mA for 14 – 16 h
Accelerated Charging (20°C):	28 mA for 7-8 h
Fast Charging:	70 mA for 3 h *
	Time controlled, voltage control recommended
Trickle Charging:	4.2 mA
Overcharge (20°C):	14 mA continuous 28 mA up to 1 year
Charge Retention [%] at 20°C:	90
	Capacity available after 1 month Storage at 20°C
Internal Resistance [Ohm]:	0.8
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)
Impedance [Ohm]:	0.13
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)
Typical Capacities [mAh]: at 140 mA / 0.90 V	88
Max. Discharge Current (cont.) [mA]:	280
Life Expectancy (typical):	
IEC Cycle:	1000 Cycles
Trickle Charge:	up to 6 years (20°C)
Trickle Charge:	up to 3 years (45°C)

* for fully discharged cells, 20 °C

Capacities based on normal charging

^{1.)} Prior to use read Rechargeable NiMH Button Cell handbook @ www.varta-microbattery.com