

483 mm (19") Jack Panels


3-Prong Connectors with Anodized Panels

Rugged 3.2 mm (1/8") Thick Panels



483 mm (19") Plain Panel Jacks

No. of Rows	Panel Height	Max No. of Jacks
1	89 mm (3 1/2")	22
2	133 mm (5 1/4")	44
3	222 mm (8 3/4")	66
4	267 mm (10 1/2")	88

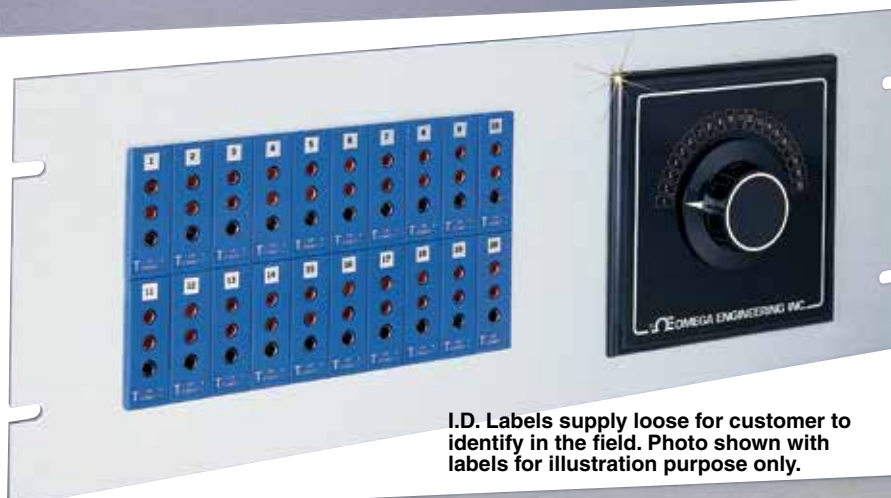

483 mm (19") Panel Jacks with Switch Cutout

No. of Rows	Panel Height mm (inch)	Switch Size mm (inch)	Max No. of Jacks
1	127 (7)	76 (5)	15
2	127 (7)	76 (5)	30
3	222 (8 3/4)	76 (5)	45
4	267 (10 1/2)	76 (5)	60

Note: When a switch is ordered with a panel, installation is included at no extra cost.

Both models shown smaller than actual size.

Consult Custom Engineering Department for information on custom/Non standard color-coded anodized or wired panels. \$1,000 minimum order. Contact custom@omega.com for pricing and availability.



Switches and meter sold separately

SW142 Series

DP41-B

Model No. ANSI Color Code	Total No. of Jacks	Switch Cutout	Meter Cutout
19TJP1-10-(*)	10	—	—
19TJP1-20-(*)	20	—	—
19TJP2-20-(*)	20	—	—
19TJP2-30-(*)	30	—	—
19TJP2-40-(*)	40	—	—
19TJP1-10-(*)-OSW	10	76 mm (5")	—
19TJP2-20-(*)-OSW	20	76 mm (5")	—
19TJP3-30-(*)-OSW	30	76 mm (5")	—
19TJP4-40-(*)-OSW	40	76 mm (5")	—
19TJP1-10-(*)-OSW-MTR	10	76 mm (5")	y
19TJP2-20-(*)-OSW-MTR	20	76 mm (5")	y
19TJP3-30-(*)-OSW-MTR	30	76 mm (5")	y
19TJP4-40-(*)-OSW-MTR	40	76 mm (5")	y

Note: Panels with switches and/or meters are not supplied wired.

483 mm (19") Jack Panels with Switch and Meter Cutouts

No. of Rows	Panel Height mm (inch)	Switch Size mm (inch)	Max. No. of Jacks
1	127 (7)	76 (5)	10
2	127 (7)	76 (5)	20
3	222 (8 3/4)	76 (5)	30
4	267 (10 1/2)	76 (5)	40

Note: A 45 x 92 mm (1 7/8" DIN) meter cutout is supplied unless otherwise specified.

* Insert calibration code in model number. Minimum order required for non-standard.
Ordering Example: 19TJP4-40-K-OSW, 483 mm (19") jack panel with Type K connector.