


High Temperature Jack Panels

For Miniature Ceramic Connectors

SHXJP Series

Shown actual size.

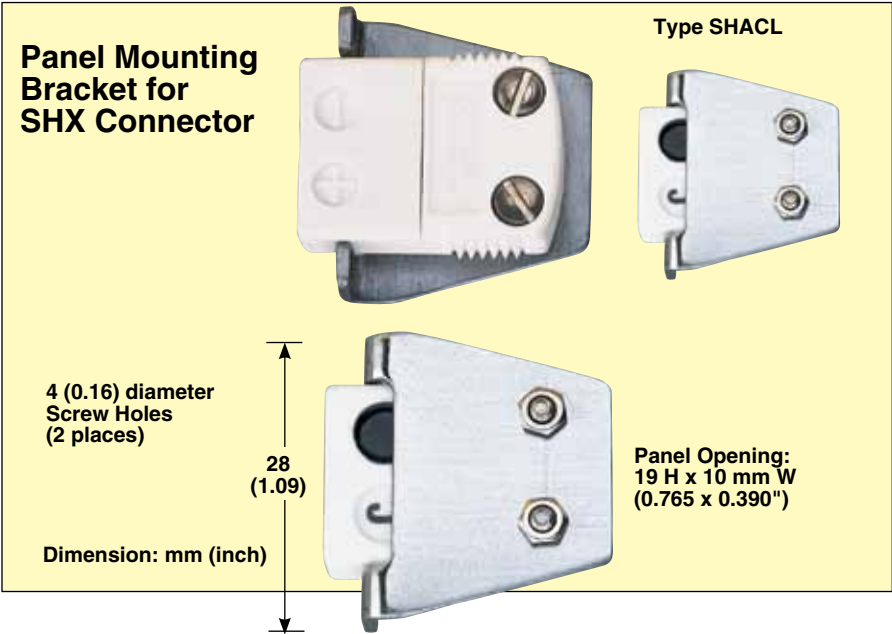

OMEGA® SHXJP panel jacks are designed for temperatures up to 538°C (1000°F), with SHX type subminiature ceramic connectors mounted to a steel plate. They are also available with unglazed connectors, type USHX, for applications where glazed connectors, would contaminate a vacuum system.

**PRICE AND QUANTITY
DISCOUNT INFORMATION**

Prices shown are for single panels of J, K, T, E, R, S, G, C, D, N or U calibrations. To order multiple panels, price each panel and connectors separately. Ceramic connectors, type **SHX**, (for male) or (for female) each. Panel mounting bracket, type SHACL, sold separately. When pricing connectors and mounting brackets, use connector quantity discount schedule below.

Circuits Per Rows (mm/inch)		1 Row 45 mm H (1¾")	2 Rows 83 mm H (3¼")	3 Rows 114 mm H (4½")	4 Rows 149 mm H (5⅞")
6 111 L (4⅜")	Model No.	SHXJP1-06-(*)	SHXJP2-12-(*)	SHXJP3-18-(*)	SHXJP4-24-(*)
12 206 L (8⅞")	Model No.	SHXJP1-12-(*)	SHXJP2-24-(*)	SHXJP3-36-(*)	SHXJP4-48-(*)
18 302 L (11⅞")	Model No.	SHXJP1-18-(*)	SHXJP2-36-(*)	SHXJP3-54-(*)	SHXJP4-72-(*)

**Insert Calibration code: J (Iron-Constantan), K (CHROMEGA®-ALOMEGA®), T (Copper-Constantan), E (CHROMEGA®-Constantan), R (Pt-Pt/13% Rh), S (Pt-Pt/10% Rh), G (W-W26% Re), N (OMEGA-P®, OMEGA-N®), C (W/5% Re-W/26% Re), D (W/3% Re-W/25% Re), U (Uncompensated)*
Shipped unassembled.

Ordering Example: SHXJP1-18-K, Single row high temperature jack panel with Type K miniature female connectors.