

## 3 x 5" 500W AC-DC Power Supplies

<https://product.tdk.com/en/power/cus-m>  
[www.emea.lambda.tdk.com/cus500m](http://www.emea.lambda.tdk.com/cus500m)



Medical



Industrial



Test



LED



COMM



Broadcast



The compact CUS500M1 is packaged in the industry standard 3x5" footprint and can deliver 500W when forced air cooled or 300W convection cooled with a 500W peak. Certified to Medical & ITE safety standards, the CUS500M1 can be used in both Class I & Class II (no ground wire) applications<sup>(1)</sup>. An enclosed model (/EF suffix) is available with an internal fan.

| Features   | Benefits                                       |
|--|--|
| • 300W (500W Peak) Convection Cooled                             | • Quiet Operation                              |
| • 500W with Forced Air   | • Can Utilize System Airflow or Integrated Fan |
| • Medical Certifications (2 x MOPP)                              | • Suitable for B and BF Type Medical Equipment |
| • Class B Conducted and Radiated EMI                             | • Easier System EMC Compliance                 |
| • Suitable for Class I and Class II installations <sup>(1)</sup> | • Flexible Utilization                         |
| • Compact 3 x 5 x 1.46" Size                                     | • Space Saving in End Equipment                |
| • Enclosure and end fan models                                   | • Versatile Application                        |

| Model Selector |                            |                       |                                |                                |                  |                              |                              |
|----------------|----------------------------|-----------------------|--------------------------------|--------------------------------|------------------|------------------------------|------------------------------|
| Model          | Nominal Output Voltage (V) | Output Adjustment (V) | Maximum Current Convection (A) | Maximum Current Forced Air (A) | Peak Current (A) | Maximum Power Convection (W) | Maximum Power Forced Air (W) |
| CUS500M1-12    | 12                         | None                  | 25.0                           | 41.7                           | 41.7             | 300                          | 500.4                        |
| CUS500M1-19    | 19                         | None                  | 15.8                           | 26.4                           | 26.4             | 300.2                        | 501.6                        |
| CUS500M1-24    | 24                         | None                  | 12.5                           | 20.9                           | 20.9             | 300                          | 501.6                        |
| CUS500M1-28    | 28                         | None                  | 10.7                           | 17.9                           | 17.9             | 299.6                        | 501.2                        |
| CUS500M1-32    | 32                         | None                  | 9.4                            | 15.7                           | 15.7             | 300.8                        | 502.4                        |
| CUS500M1-36    | 36                         | None                  | 8.3                            | 13.9                           | 13.9             | 298.8                        | 500.4                        |
| CUS500M1-48    | 48                         | None                  | 6.3                            | 10.5                           | 10.5             | 302.4                        | 504.0                        |

|                  |   |          |  |
|------------------|---|----------|--|
| <b>CUS500M1-</b> | <b>12</b>                                 | <b>/</b> | <b>EF</b>  |
|                  | Output voltage 12, 19, 24, 28, 32, 36, 48 |          | blank Open frame construction<br>/EF Enclosed with end fan (exhaust air) |

Other options are available, please contact sales

| Specifications  |     |   |
|---|-----|---|
| Model   |     | CUS500M1  |
| <b>Input</b>  |     |   |
| Input Voltage range                                     | Vac | 85 - 265 (See derating curves)  |
| Input Frequency   | Hz  | 47 - 63   |
| Input Current (110/230Vac)                              | A   | < 5.0 / 2.5 (500W)  |
| Inrush Current at 230Vac (typ) (Cold Start)             | A   | <50   |
| Leakage Current   | uA  | <200 at 265Vac 60Hz   |
| Touch Current (Enclosure Leakage)                       | uA  | <100  |
| Power Factor (115/230Vac)                               | -   | 0.99 / 0.94   |
| Harmonic Compliance                                     | -   | Meets IEC61000-3-2 Class A  |
| No Load Power Consumption                               | W   | -   |
| Hold Up Time (typ) at 115Vac Input                      | ms  | 22 at 300W load, 14 at 500W load  |
| Efficiency  | %   | Up to 96  |
| Conducted & Radiated EMI (Class I only <sup>(1)</sup> ) | -   | EN55032/EN55011-B (See installation / instruction manual for conditions)  |
| Immunity (Class I only <sup>(1)</sup> )                 | -   | Compliant with EN60601-1-2:2015 (Ed4), see immunity table                 |
| Insulation Class  | -   | Construction suitable for Class I or Class II installation <sup>(1)</sup> |
| Safety Agency Certifications                            | -   | IEC/EN/UL62368-1 and 60601-1, ES60601-1, CE Mark (LVD, EMC and RoHS)      |

Note:

(1) Class II operation may require additional EMC filtering, contact factory for assistance.

| Immunity                             |   |                        |   |   |
|--------------------------------------|---|------------------------|---|---|
| Test                                 | Standard  | Test Level             | Criteria  | Notes <sup>(1)</sup>                                      |
| ESD                                  | EN61000-4-2   | 4                      | A   | -   |
| Radiated Susceptibility              | EN61000-4-3   | 3                      | A   | Includes proximity field requirements of EN60601-1-2:2015 |
| Electrical Fast Transient Burst      | EN61000-4-4   | 4                      | A   | (AC Port, 5kHz and 100kHz)                                |
| Surge                                | EN61000-4-5   | 3                      | A   | -   |
| Conducted Susceptibility             | EN61000-4-6   | 3                      | A   | -   |
| Magnetic fields                      | EN61000-4-8   | 4                      | A   | -   |
| Voltage Dips and Input Interruptions | EN61000-4-11<br>Class 3 Industrial,<br>incl EN55024<br>(100Vac) | 0% for 1/2 cycle       | A   | -   |
|                                      |   | 0% for 1 cycle         | A/B   | A up to 280W, B above 280W                                |
|                                      |   | 40% for 10/12 cycles   | A/B   | A up to 180W, B above 180W                                |
|                                      |   | 70% for 25/30 cycles   | A/B   | A up to 440W, B above 440W                                |
|                                      |   | 80% for 250/300 cycles | A   | -   |
|                                      |   | 0% for 250/300 cycles  | B   | -   |
|                                      | EN61000-4-11<br>Class 3 Industrial,<br>incl EN55024<br>(240Vac) | 0% for 1/2 cycle       | A   | -   |
|                                      |   | 0% for 1 cycle         | A/B   | A up to 280W, B above 280W                                |
|                                      |   | 40% for 10/12 cycles   | A/B   | -   |
|                                      |   | 70% for 25/30 cycles   | A   | -   |
|                                      |   | 80% for 250/300 cycles | A   | -   |
|                                      |   | 0% for 250/300 cycles  | B   | -   |
| EN60601-1-2:2015<br>(100Vac)         | 0% for 1/2 cycle  | A                      | Customer to consider essential performance of end equipment |   |
|                                      | 0% for 1 cycle  | A/B                    | A up to 280W, B above 280W                                  |   |
|                                      | 70% for 25/30 cycles  | A                      | A up to 440W, B above 440W                                  |   |
|                                      | 0% for 250/300 cycles   | B                      | -   |   |
| EN60601-1-2:2015<br>(240Vac)         | 0% for 1/2 cycle  | A                      | Customer to consider essential performance of end equipment |   |
|                                      | 0% for 1 cycle  | A/B                    | A up to 280W, B above 280W                                  |   |
|                                      | 70% for 25/30 cycles  | A                      | -   |   |
|                                      | 0% for 250/300 cycles   | B                      | Customer to consider essential performance of end equipment |   |
| SEMI F47 Line Dip                    | SEMI F47  | -                      | -   | At input voltages > 200Vac                                |


| Specifications                         |        |  |
|--|--------|--|
| Model                                  |        | CUS500M1   |
| <b>Output</b>                          |        |  |
| Line Regulation                        | %      | 0.5 (85 - 265Vac)  |
| Load Regulation                        | %      | 1 (0 - 100% load)  |
| External Load Capacitance              | uF     | 12-19V: 10,000, 24V: 8,000, 28V: 4,000, 32-36V: 3,000, 48V: 2,500  |
| Ripple & Noise                         | mV     | 12V: 240, 19V - 28V: 360, 32V - 48V: 480   |
| Temperature Coefficient                | %/°C   | ±0.02  |
| Minimum Load                           | -      | No minimum load required   |
| Overcurrent Protection                 | %      | >105. Hiccup mode, automatic recovery  |
| Overvoltage Protection                 | V      | 12V: 13.8-16.2, 19V: 21.8-25.7, 24V: 27.6-32.4, 28V:32.2-37.8, 32V: 36.8-43.2, 36V: 41.4-48.6, 48V: 55.2-64.8<br>Latching (unit shutdown), cycle AC input to reset |
| Overtemperature Protection             | -      | Latching (unit shutdown), cycle AC input to reset  |
| Remote Sense                           | -      | -  |
| Remote On/Off                          | -      | -  |
| Power Good                             | -      | -  |
| Standby Voltage                        | -      | -  |
| Parallel Operation                     | -      | Not possible   |
| Series Operation                       | -      | Possible, see installation manual  |
| <b>Environmental</b>                   |        |  |
| Operating Temperature (-25°C start-up) | °C     | -20 to +70, see derating curves below  |
| Storage Temperature                    | °C     | -40 to +85   |
| Operating Humidity (non condensing)    | %RH    | 10 - 95  |
| Cooling                                | -      | Convection cooling or forced air (2.7m/s)  |
| Altitude                               | m      | 5,000. Operating, transportation and storage   |
| Withstand Voltage (For 1 minute)       | Vac    | Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPP),<br>Output to Ground 1500 (1xMOPP)  |
| Isolation Resistance                   | MΩ     | >100 at 25°C, 70%RH & 500VDC   |
| Vibration (Non Operating)              | -      | 10-55Hz (1 min sweep). Maximum 19.6m/s <sup>2</sup> , 1 hour each  |
| Shock                                  | -      | <196m/s <sup>2</sup>   |
| <b>Other</b>                           |        |  |
| Weight (Typ)                           | g      | Open frame: 450, /EF: 790  |
| Size (LxWxH)                           | mm     | Open frame: 127 x 76.2 x 37, /EF: 157 x 85 x 42.5  |
| Size (LxWxH)                           | Inches | Open frame: 5 x 3 x 1.46, /EF: 6.18 x 3.35 x 1.67  |
| Connectors                             | -      | Input: JST VHR-5N, Output: M4 screws   |
| Warranty                               | yrs    | 5  |

**Notes:**


See website for detailed specifications, test methods and installation manual

Specification parameters apply at 25°C ambient temperature unless otherwise stated.

**Mounting Orientation**

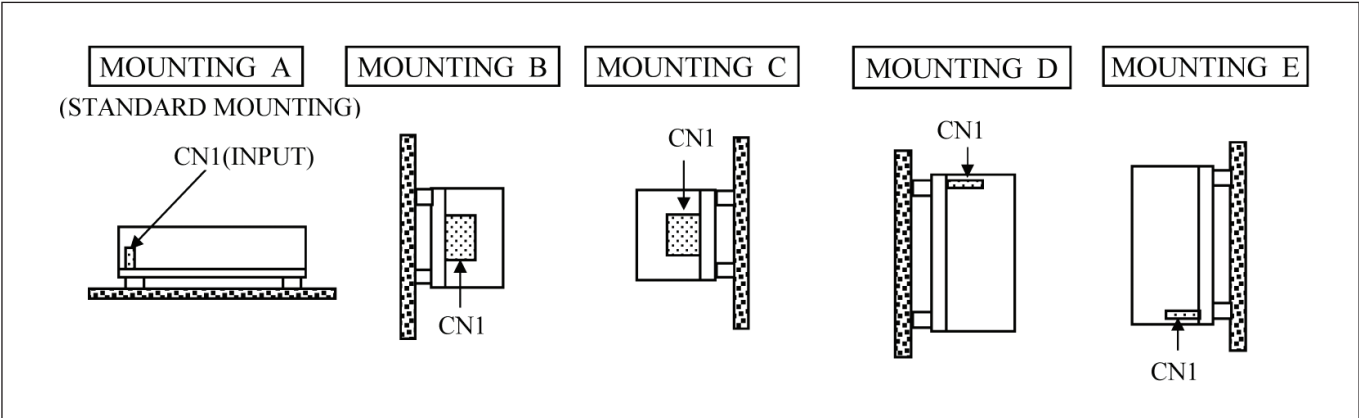


**Airflow Direction**

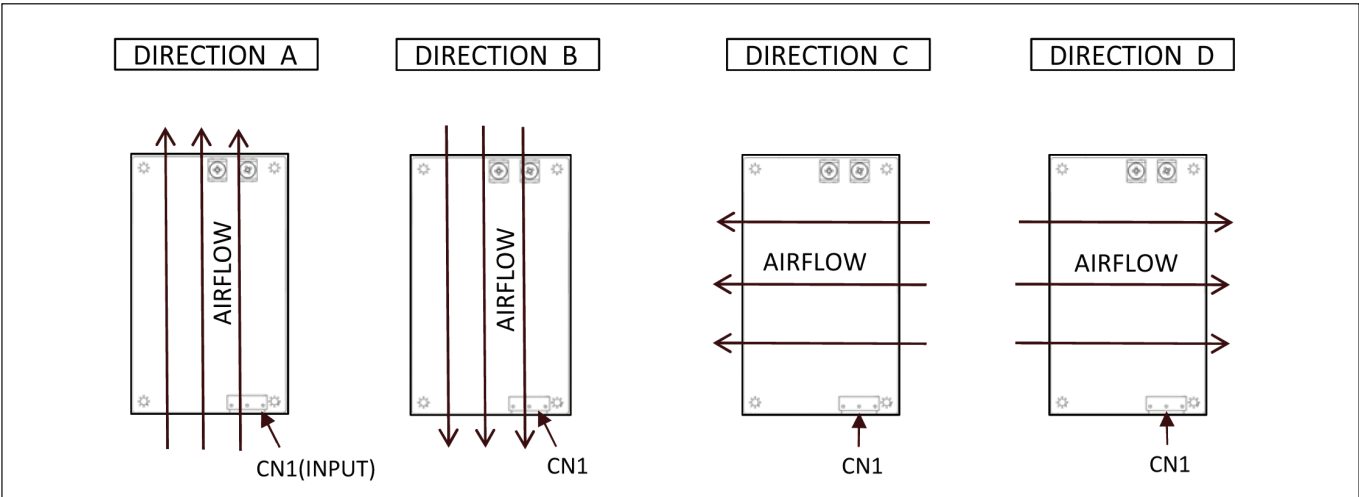

## Convection Cooling CUS500M1

(Additional derating applies below 115Vac input)

| Ta (°C)   | Mounting A B C E | Mounting D |
|-----------|------------------|------------|
|           | LOAD (%)         | LOAD (%)   |
| -20 - +35 | 100              | 100        |
| 40        | 100              | 91.4       |
| 50        | 83.3             | 74.3       |
| 60        | 66.7             | 57.1       |
| 70        | 50               | 40         |

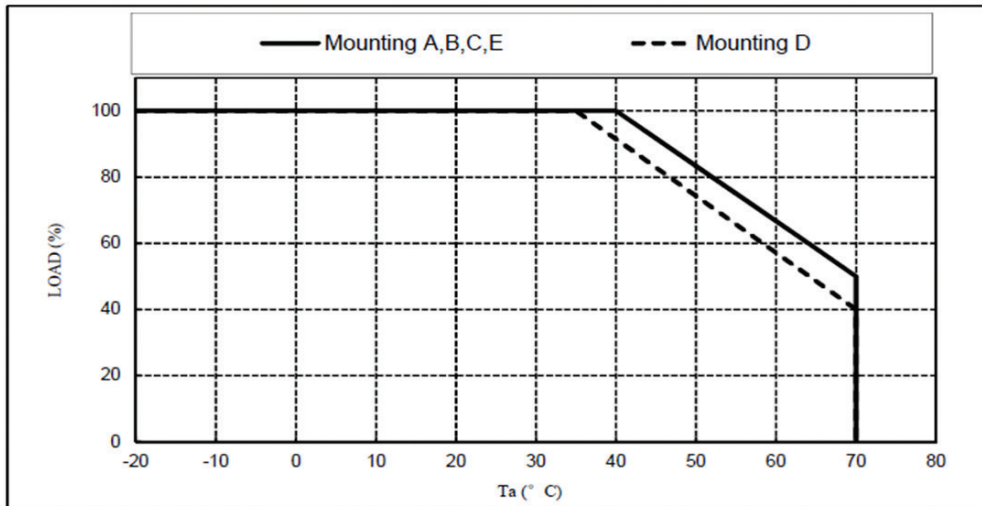


## Forced Air Cooling CUS500M1-12 (2.7m/s)

(Additional derating applies below 115Vac input)

MODEL: CUS500M1-12

| Ta (°C)   | Direction A | Direction B | Direction C | Direction D |
|-----------|-------------|-------------|-------------|-------------|
|           | LOAD (%)    | LOAD (%)    | LOAD (%)    | LOAD (%)    |
| -20 - +30 | 90          | 100         | 100         | 90          |
| 40        | 82.5        | 100         | 100         | 90          |
| 45        | 78.8        | 100         | 100         | 90          |
| 50        | 75          | 100         | 100         | 86          |
| 60        | 67.5        | 90          | 100         | 78          |
| 70        | 60          | 80          | 80          | 70          |

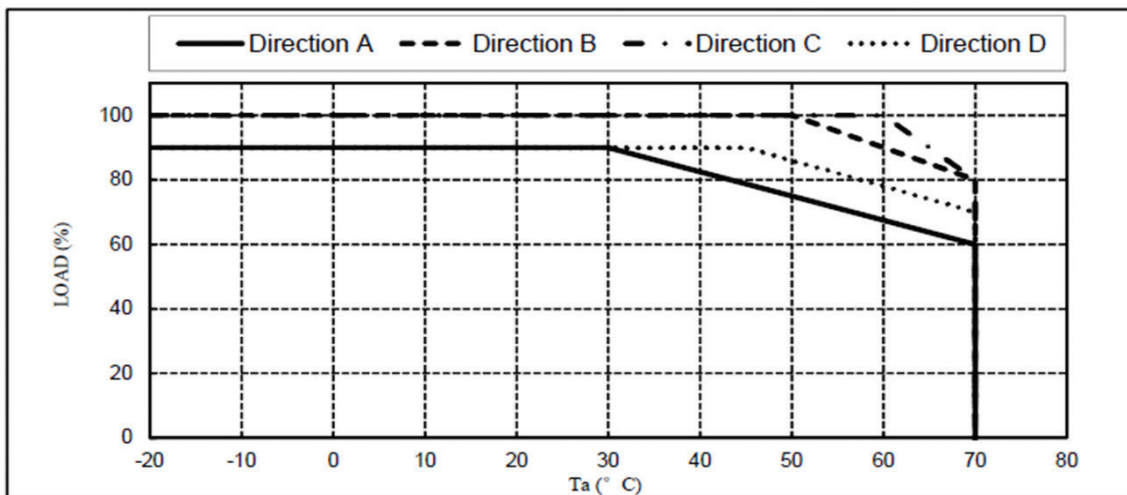


**Forced Air Cooling CUS500M1-19 to -48 (2.7m/s)**

(Additional derating applies below 115Vac input)

MODEL: CUS500M1-19/24/28/32/36/48


| Ta (°C)   | Direction A D | Direction B | Direction C |
|-----------|---------------|-------------|-------------|
|           | LOAD (%)      | LOAD (%)    | LOAD (%)    |
| -20 - +45 | 100           | 100         | 100         |
| 50        | 94            | 100         | 100         |
| 60        | 82            | 90          | 100         |
| 70        | 70            | 80          | 80          |

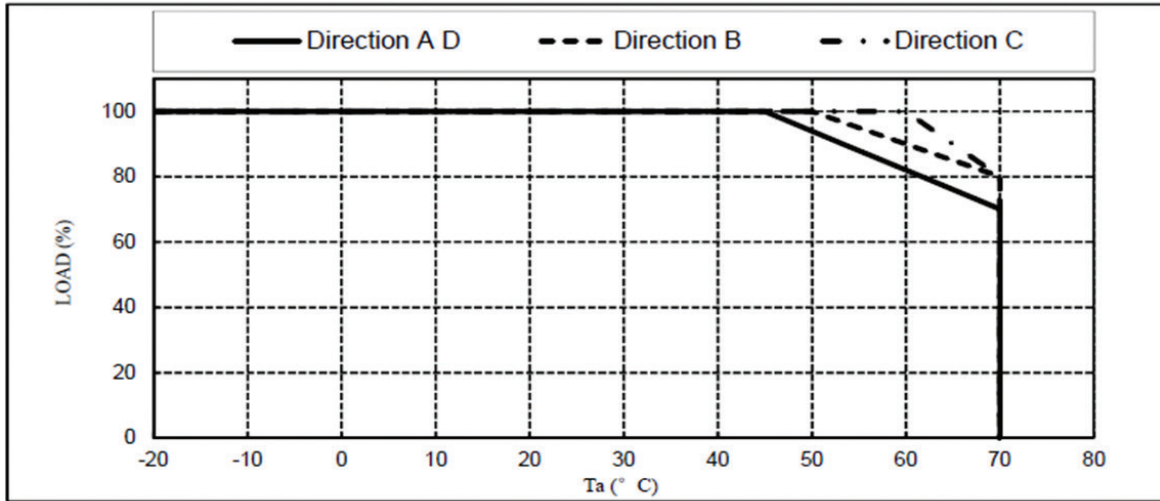

**CUS500M1-xx/EF (End Fan)**

(All models, all conditions)


| Ta (°C)   | LOAD (%) |
|-----------|----------|
| -10 - +45 | 100      |
| 50        | 83.3     |
| 60        | 50       |

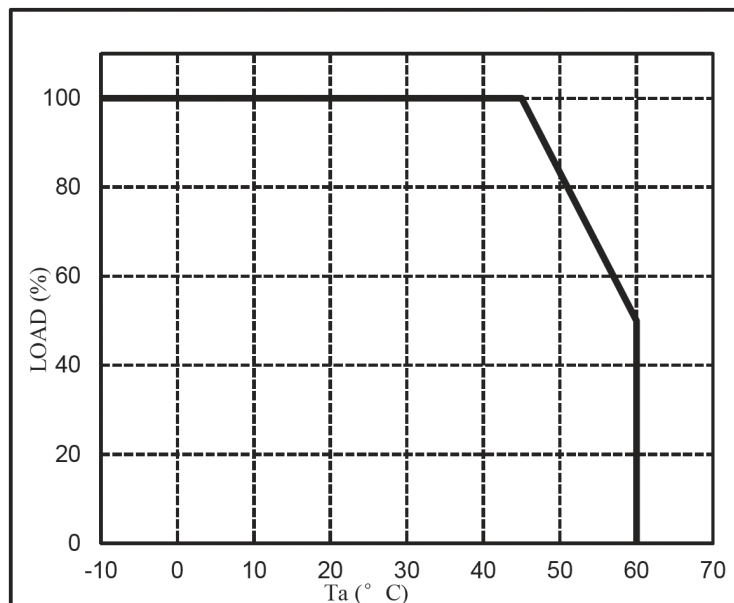

**Derating versus Input Voltage**


(All models, all conditions)

| INPUT VOLTAGE (VAC) | LOAD (%) |
|---------------------|----------|
| 85                  | 80       |
| 115~265             | 100      |

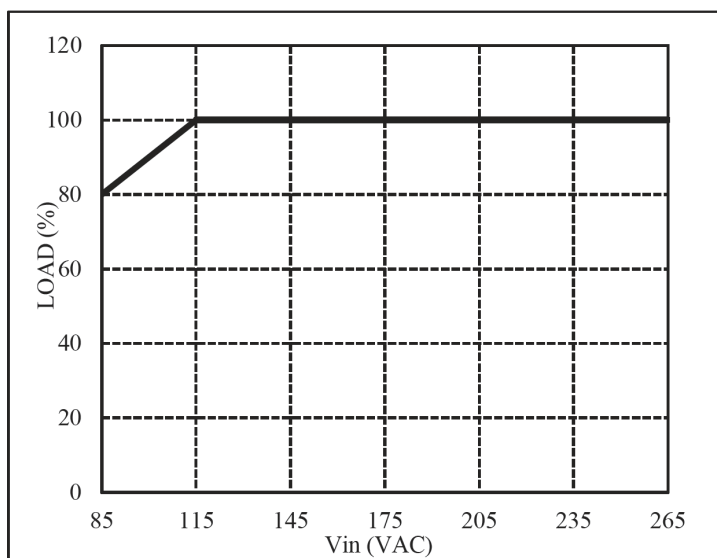


Mechanical Specification

Outline Drawing CUS500M1 Open Frame Unit

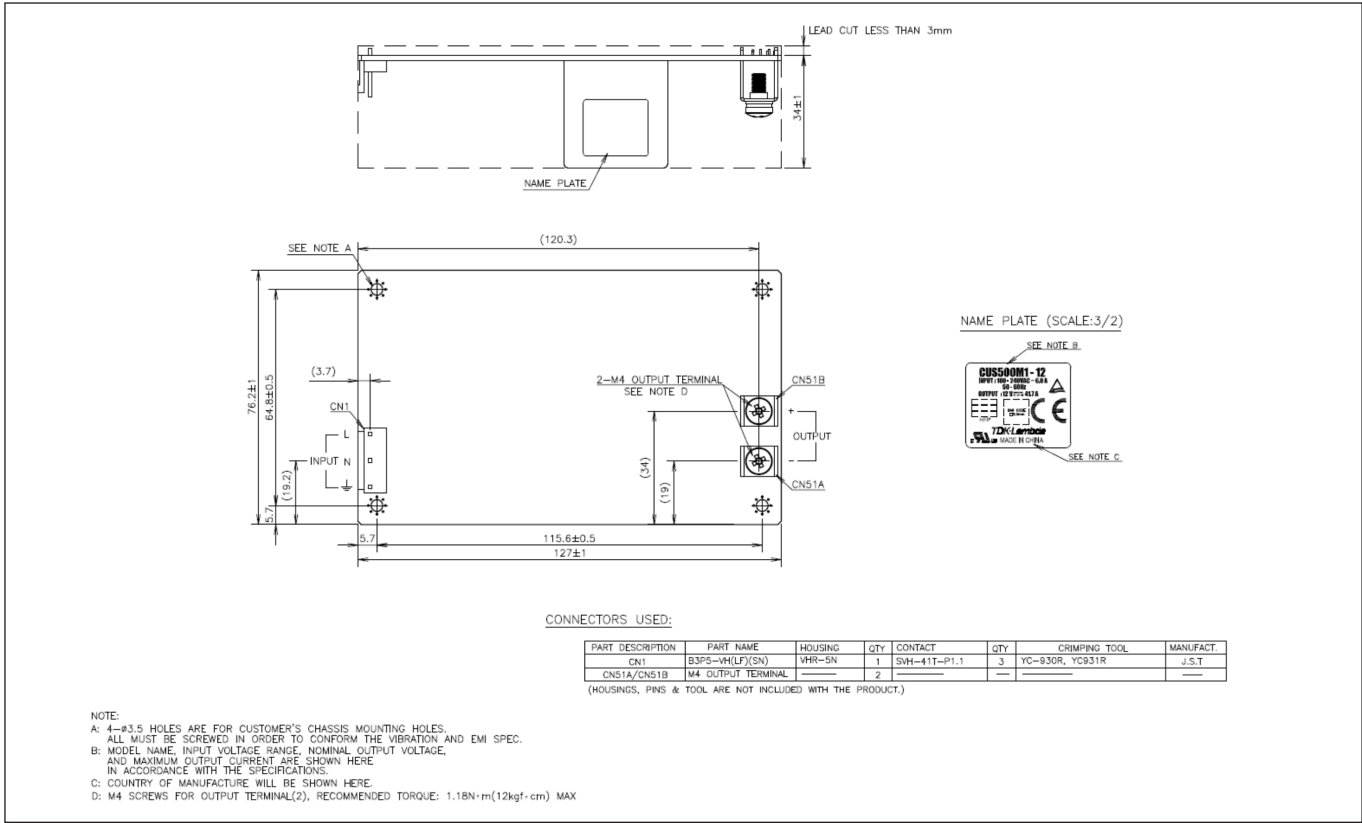

Outline Drawings CUS500M1 End Fan

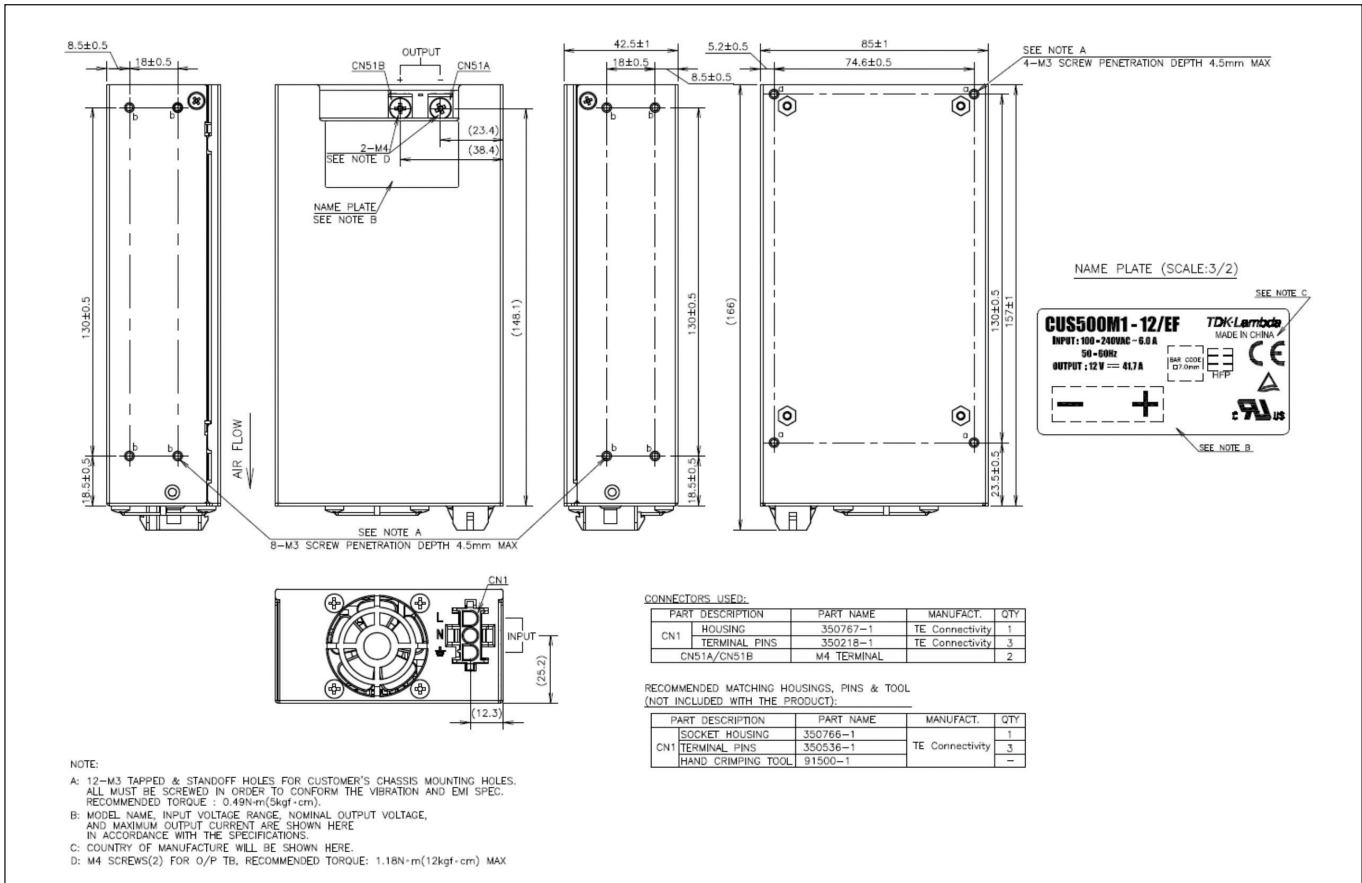



**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 ttf.fr-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 ttf.it-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

ttf.nl-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlg.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlg.at-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlg.ch-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlg.dk-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tti.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tia.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tis.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

