


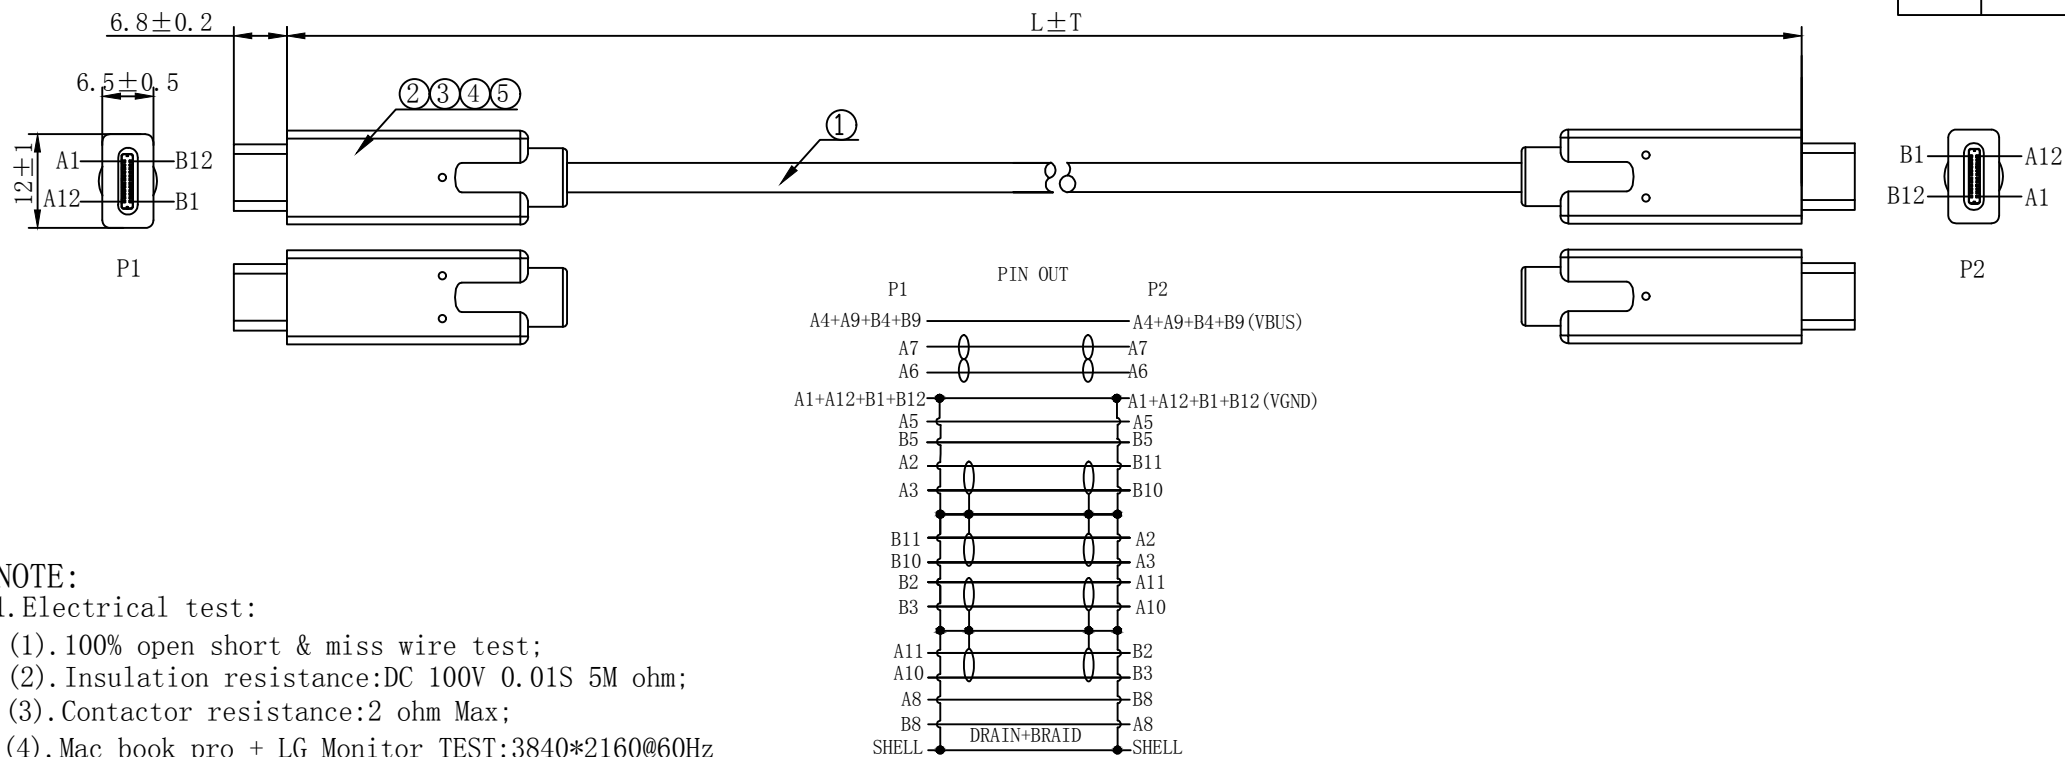

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 100V 0.01S 5M ohm;
- (3). Contactor resistance: 2 ohm Max;
- (4). Mac book pro + LG Monitor TEST: 3840*2160@60Hz
- (5). Transmission rate : GEN2*2 20Gbps Current rate: 5A

2. ROHS 2.0 REACH COMPLIANT

3. PRINTING: E***** 兄 AWM STYLE 2725 80°C 30V VW-1

SUPER HIGH SPEED USB Revision 3.2

4. Support 100W MAX

MATERIAL LIST:

⑤	OUT MOLD	PVC Moulding	2	
④	INNER MOLD	LD-PE	2	
③	E-mark	GEN2*2 20Gbps 5A	1	
②	TYPE C	USB C/M Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating+Iron Shield	2	
①	CABLE	USB 3.1 CABLE (32AWG TC*1P+E+AM)*4+32AWG TC*1P+32AWG TC*4C +22AWG TC*2C+AL+B+PVC/BLACK OD: 4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2021. 09. 03	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	LENGTH
11. 02. 9070	500±20mm
11. 02. 9071	1000±30mm

DESC.	Roline USB 3.2 GEN2×2 (20Gbit/s) Type C-C, M/M
-------	--

SECOMP