


EasyPACK™ 2B module with Trench/Fieldstop IGBT H3 and rapid diode and PressFIT / NTC

Features

- Electrical features
 - $V_{CES} = 650\text{ V}$
 - $I_{C\text{nom}} = 100\text{ A} / I_{CRM} = 200\text{ A}$
 - Increased blocking voltage capability up to 650 V
 - Low inductive design
 - Low switching losses
 - Low $V_{CE,\text{sat}}$
- Mechanical features
 - Al_2O_3 substrate with low thermal resistance
 - Compact design
 - PressFIT contact technology
 - Rugged mounting due to integrated mounting clamps



Potential applications

- Three-level applications
- Motor drives
- Solar applications

Product validation

- Qualified for industrial applications according to the relevant tests of IEC 60747, 60749 and 60068

Description

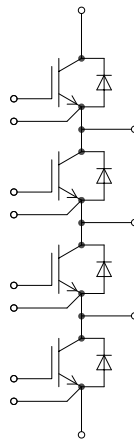


Table of contents

	Description	1
	Features	1
	Potential applications	1
	Product validation	1
	Table of contents	2
1	Package	3
2	IGBT, T1 / T4	3
3	Diode, D1 / D4	5
4	IGBT, T2 / T3	5
5	Diode, D2 / D3	7
6	NTC-Thermistor	8
7	Characteristics diagrams	9
8	Circuit diagram	16
9	Package outlines	17
10	Module label code	18
	Revision history	19
	Disclaimer	20

1 Package

Table 1 Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	V_{ISOL}	RMS, $f = 50$ Hz, $t = 1$ min	3.0	kV
Internal isolation		basic insulation (class 1, IEC 61140)	Al_2O_3	
Creepage distance	d_{Creep}	terminal to heatsink	11.5	mm
Creepage distance	d_{Creep}	terminal to terminal	6.3	mm
Clearance	d_{Clear}	terminal to heatsink	10.0	mm
Clearance	d_{Clear}	terminal to terminal	5.0	mm
Comparative tracking index	CTI		> 200	
Relative thermal index (electrical)	RTI	housing	140	°C

Table 2 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Stray inductance module	L_{SCE}			41		nH
Storage temperature	T_{stg}		-40		125	°C
Mounting force per clamp	F		40		80	N
Weight	G			39		g

Note: The current under continuous operation is limited to 25A rms per connector pin.

2 IGBT, T1 / T4

Table 3 Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit
Collector-emitter voltage	V_{CES}	$T_{vj} = 25$ °C	650	V
Implemented collector current	I_{CN}		50	A
Continuous DC collector current	I_{CDC}	$T_{vj\ max} = 175$ °C $T_H = 65$ °C	40	A
Repetitive peak collector current	I_{CRM}	$t_p = 1$ ms	100	A
Gate-emitter peak voltage	V_{GES}		±20	V

Table 4 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Collector-emitter saturation voltage	$V_{CE\ sat}$	$I_C = 50\ A, V_{GE} = 15\ V$	$T_{vj} = 25\ ^\circ C$		1.68	2.00	V
			$T_{vj} = 125\ ^\circ C$		1.86		
			$T_{vj} = 150\ ^\circ C$		1.89		
Gate threshold voltage	V_{GEth}	$I_C = 0.8\ mA, V_{CE} = V_{GE}, T_{vj} = 25\ ^\circ C$		5.05	5.75	6.45	V
Gate charge	Q_G	$V_{GE} = \pm 15\ V, V_{CE} = 400\ V$			0.5		μC
Internal gate resistor	R_{Gint}	$T_{vj} = 25\ ^\circ C$			0		Ω
Input capacitance	C_{ies}	$f = 100\ kHz, T_{vj} = 25\ ^\circ C, V_{CE} = 650\ V, V_{GE} = 0\ V$			2.95		nF
Reverse transfer capacitance	C_{res}	$f = 100\ kHz, T_{vj} = 25\ ^\circ C, V_{CE} = 650\ V, V_{GE} = 0\ V$			0.096		nF
Collector-emitter cut-off current	I_{CES}	$V_{CE} = 650\ V, V_{GE} = 0\ V$	$T_{vj} = 25\ ^\circ C$			0.021	mA
Gate-emitter leakage current	I_{GES}	$V_{CE} = 650\ V, V_{GE} = 0\ V, T_{vj} = 25\ ^\circ C$				100	nA
Turn-on delay time (inductive load)	t_{don}	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.014		μs
			$T_{vj} = 125\ ^\circ C$		0.015		
			$T_{vj} = 150\ ^\circ C$		0.015		
Rise time (inductive load)	t_r	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.008		μs
			$T_{vj} = 125\ ^\circ C$		0.010		
			$T_{vj} = 150\ ^\circ C$		0.011		
Turn-off delay time (inductive load)	t_{doff}	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.124		μs
			$T_{vj} = 125\ ^\circ C$		0.147		
			$T_{vj} = 150\ ^\circ C$		0.150		
Fall time (inductive load)	t_f	$I_C = 50\ A, V_{CE} = 300\ V, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ C$		0.038		μs
			$T_{vj} = 125\ ^\circ C$		0.073		
			$T_{vj} = 150\ ^\circ C$		0.084		
Turn-on energy loss per pulse	E_{on}	$I_C = 50\ A, V_{CE} = 300\ V, L_\sigma = 35\ nH, V_{GE} = \pm 15\ V, R_{Gon} = 2.2\ \Omega, di/dt = 4100\ A/\mu s (T_{vj} = 150\ ^\circ C)$	$T_{vj} = 25\ ^\circ C$		0.244		mJ
			$T_{vj} = 125\ ^\circ C$		0.406		
			$T_{vj} = 150\ ^\circ C$		0.451		
Turn-off energy loss per pulse	E_{off}	$I_C = 50\ A, V_{CE} = 300\ V, L_\sigma = 35\ nH, V_{GE} = \pm 15\ V, R_{Goff} = 2.2\ \Omega, dv/dt = 5100\ V/\mu s (T_{vj} = 150\ ^\circ C)$	$T_{vj} = 25\ ^\circ C$		0.593		mJ
			$T_{vj} = 125\ ^\circ C$		0.94		
			$T_{vj} = 150\ ^\circ C$		1.06		
Thermal resistance, junction to heat sink	R_{thJH}	per IGBT			1.19		K/W
Temperature under switching conditions	$T_{vj\ op}$			-40		150	$^\circ C$

3 Diode, D1 / D4

Table 5 Maximum rated values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Repetitive peak reverse voltage	V_{RRM}	$T_{vj} = 25\text{ °C}$		650		V
Continuous DC forward current	I_F			75		A
Repetitive peak forward current	I_{FRM}	$t_p = 1\text{ ms}$		150		A
I^2t - value	I^2t	$V_R = 0\text{ V}, t_p = 10\text{ ms}$	$T_{vj} = 125\text{ °C}$	680		A^2s
			$T_{vj} = 150\text{ °C}$	660		

Table 6 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit	
			Min.	Typ.	Max.		
Forward voltage	V_F	$I_F = 75\text{ A}$	$T_{vj} = 25\text{ °C}$		1.65	2.15	V
			$T_{vj} = 125\text{ °C}$		1.55		
			$T_{vj} = 150\text{ °C}$		1.50		
Peak reverse recovery current	I_{RM}	$I_F = 75\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 3400\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		63		A
			$T_{vj} = 125\text{ °C}$		75		
			$T_{vj} = 150\text{ °C}$		79.1		
Recovered charge	Q_r	$I_F = 75\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 3400\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		2		μC
			$T_{vj} = 125\text{ °C}$		3.8		
			$T_{vj} = 150\text{ °C}$		4.5		
Reverse recovery energy	E_{rec}	$I_F = 75\text{ A}, V_R = 300\text{ V}, V_{GE} = -15\text{ V}, -di_F/dt = 3400\text{ A}/\mu\text{s} (T_{vj} = 150\text{ °C})$	$T_{vj} = 25\text{ °C}$		0.433		mJ
			$T_{vj} = 125\text{ °C}$		0.813		
			$T_{vj} = 150\text{ °C}$		0.959		
Thermal resistance, junction to heat sink	R_{thJH}	per diode		1.16		K/W	
Temperature under switching conditions	$T_{vj\text{ op}}$		-40		150	$^{\circ}\text{C}$	

4 IGBT, T2 / T3

Table 7 Maximum rated values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter voltage	V_{CES}	$T_{vj} = 25\text{ °C}$		650		V

(table continues...)

Table 7 (continued) Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit
Implemented collector current	I_{CN}		100	A
Continuous DC collector current	I_{CDC}	$T_{vj\ max} = 175\ ^\circ\text{C}$ $T_H = 65\ ^\circ\text{C}$	70	A
Repetitive peak collector current	I_{CRM}	$t_p = 1\ \text{ms}$	200	A
Gate-emitter peak voltage	V_{GES}		± 20	V

Table 8 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\ sat}$	$I_C = 100\ \text{A}, V_{GE} = 15\ \text{V}$	$T_{vj} = 25\ ^\circ\text{C}$	1.46	1.90	V
			$T_{vj} = 125\ ^\circ\text{C}$	1.61		
			$T_{vj} = 150\ ^\circ\text{C}$	1.68		
Gate threshold voltage	V_{GEth}	$I_C = 1.6\ \text{mA}, V_{CE} = V_{GE}, T_{vj} = 25\ ^\circ\text{C}$	5.05	5.75	6.45	V
Gate charge	Q_G	$V_{GE} = \pm 15\ \text{V}, V_{CE} = 400\ \text{V}$		1.1		μC
Internal gate resistor	R_{Gint}	$T_{vj} = 25\ ^\circ\text{C}$		2		Ω
Input capacitance	C_{ies}	$f = 100\ \text{kHz}, T_{vj} = 25\ ^\circ\text{C}, V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$		6.2		nF
Reverse transfer capacitance	C_{res}	$f = 100\ \text{kHz}, T_{vj} = 25\ ^\circ\text{C}, V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$		0.19		nF
Collector-emitter cut-off current	I_{CES}	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}$ $T_{vj} = 25\ ^\circ\text{C}$			0.016	mA
Gate-emitter leakage current	I_{GES}	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25\ ^\circ\text{C}$			100	nA
Turn-on delay time (inductive load)	t_{don}	$I_C = 100\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.072		μs
			$T_{vj} = 125\ ^\circ\text{C}$	0.082		
			$T_{vj} = 150\ ^\circ\text{C}$	0.083		
Rise time (inductive load)	t_r	$I_C = 100\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Gon} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.024		μs
			$T_{vj} = 125\ ^\circ\text{C}$	0.027		
			$T_{vj} = 150\ ^\circ\text{C}$	0.027		
Turn-off delay time (inductive load)	t_{doff}	$I_C = 100\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.185		μs
			$T_{vj} = 125\ ^\circ\text{C}$	0.215		
			$T_{vj} = 150\ ^\circ\text{C}$	0.220		
Fall time (inductive load)	t_f	$I_C = 100\ \text{A}, V_{CE} = 300\ \text{V}, V_{GE} = \pm 15\ \text{V}, R_{Goff} = 2.2\ \Omega$	$T_{vj} = 25\ ^\circ\text{C}$	0.027		μs
			$T_{vj} = 125\ ^\circ\text{C}$	0.063		
			$T_{vj} = 150\ ^\circ\text{C}$	0.084		

(table continues...)

Table 8 (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Turn-on energy loss per pulse	E_{on}	$I_C = 100\text{ A}$, $V_{CE} = 300\text{ V}$, $L_\sigma = 35\text{ nH}$, $V_{GE} = \pm 15\text{ V}$, $R_{Gon} = 2.2\ \Omega$, $di/dt = 3600\text{ A}/\mu\text{s}$ ($T_{vj} = 150\text{ }^\circ\text{C}$)	$T_{vj} = 25\text{ }^\circ\text{C}$	0.981		mJ
			$T_{vj} = 125\text{ }^\circ\text{C}$	1.42		
			$T_{vj} = 150\text{ }^\circ\text{C}$	1.53		
Turn-off energy loss per pulse	E_{off}	$I_C = 100\text{ A}$, $V_{CE} = 300\text{ V}$, $L_\sigma = 35\text{ nH}$, $V_{GE} = \pm 15\text{ V}$, $R_{Goff} = 2.2\ \Omega$, $dv/dt = 5300\text{ V}/\mu\text{s}$ ($T_{vj} = 150\text{ }^\circ\text{C}$)	$T_{vj} = 25\text{ }^\circ\text{C}$	1.37		mJ
			$T_{vj} = 125\text{ }^\circ\text{C}$	2.06		
			$T_{vj} = 150\text{ }^\circ\text{C}$	2.3		
Thermal resistance, junction to heat sink	R_{thJH}	per IGBT		0.830		K/W
Temperature under switching conditions	$T_{vj\text{op}}$		-40		150	$^\circ\text{C}$

5 Diode, D2 / D3

Table 9 Maximum rated values

Parameter	Symbol	Note or test condition	Values	Unit	
Repetitive peak reverse voltage	V_{RRM}	$T_{vj} = 25\text{ }^\circ\text{C}$	650	V	
Continuous DC forward current	I_F		50	A	
Repetitive peak forward current	I_{FRM}	$t_p = 1\text{ ms}$	100	A	
I^2t - value	I^2t	$V_R = 0\text{ V}$, $t_p = 10\text{ ms}$	$T_{vj} = 125\text{ }^\circ\text{C}$	390	A^2s
			$T_{vj} = 150\text{ }^\circ\text{C}$	370	

Table 10 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 50\text{ A}$	$T_{vj} = 25\text{ }^\circ\text{C}$	1.65	2.15	V
			$T_{vj} = 125\text{ }^\circ\text{C}$	1.55		
			$T_{vj} = 150\text{ }^\circ\text{C}$	1.50		
Peak reverse recovery current	I_{RM}	$I_F = 50\text{ A}$, $V_R = 300\text{ V}$, $V_{GE} = -15\text{ V}$, $-di_F/dt = 4100\text{ A}/\mu\text{s}$ ($T_{vj} = 150\text{ }^\circ\text{C}$)	$T_{vj} = 25\text{ }^\circ\text{C}$	59.9		A
			$T_{vj} = 125\text{ }^\circ\text{C}$	72.3		
			$T_{vj} = 150\text{ }^\circ\text{C}$	76.6		

(table continues...)

Table 10 (continued) Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Recovered charge	Q_r	$I_F = 50 \text{ A}$, $V_R = 300 \text{ V}$, $V_{GE} = -15 \text{ V}$, $-di_F/dt =$ $4100 \text{ A}/\mu\text{s}$ ($T_{vj} = 150 \text{ }^\circ\text{C}$)	$T_{vj} = 25 \text{ }^\circ\text{C}$	1.49		μC
			$T_{vj} = 125 \text{ }^\circ\text{C}$	2.75		
			$T_{vj} = 150 \text{ }^\circ\text{C}$	3.18		
Reverse recovery energy	E_{rec}	$I_F = 50 \text{ A}$, $V_R = 300 \text{ V}$, $V_{GE} = -15 \text{ V}$, $-di_F/dt =$ $4100 \text{ A}/\mu\text{s}$ ($T_{vj} = 150 \text{ }^\circ\text{C}$)	$T_{vj} = 25 \text{ }^\circ\text{C}$	0.332		mJ
			$T_{vj} = 125 \text{ }^\circ\text{C}$	0.638		
			$T_{vj} = 150 \text{ }^\circ\text{C}$	0.734		
Thermal resistance, junction to heat sink	R_{thJH}	per diode		1.64		K/W
Temperature under switching conditions	$T_{vj\text{op}}$		-40		150	$^\circ\text{C}$

6 NTC-Thermistor

Table 11 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	R_{25}	$T_{NTC} = 25 \text{ }^\circ\text{C}$		5		k Ω
Deviation of R_{100}	$\Delta R/R$	$T_{NTC} = 100 \text{ }^\circ\text{C}$, $R_{100} = 493 \text{ } \Omega$	-5		5	%
Power dissipation	P_{25}	$T_{NTC} = 25 \text{ }^\circ\text{C}$			20	mW
B-value	$B_{25/50}$	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298,15 \text{ K}))]$		3375		K
B-value	$B_{25/80}$	$R_2 = R_{25} \exp[B_{25/80}(1/T_2 - 1/(298,15 \text{ K}))]$		3411		K
B-value	$B_{25/100}$	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298,15 \text{ K}))]$		3433		K


Note: Specification according to the valid application note.

7 Characteristics diagrams

Output characteristic (typical), IGBT, T1 / T4

$$I_C = f(V_{CE})$$


$$V_{GE} = 15 \text{ V}$$

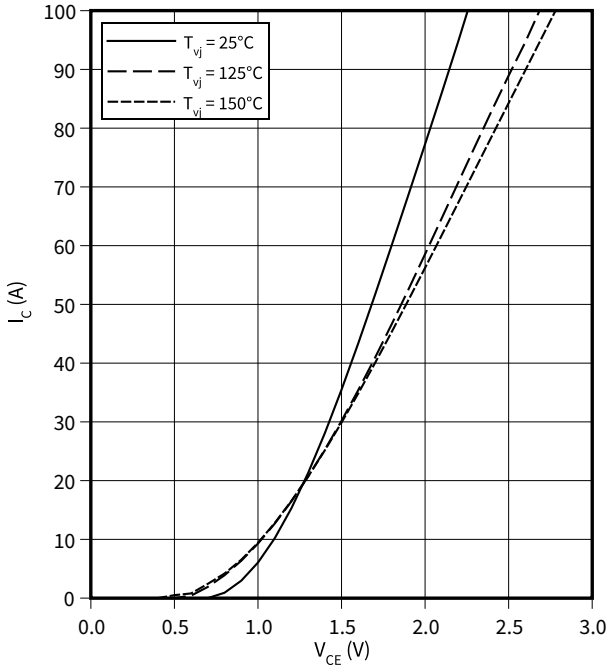

Output characteristic field (typical), IGBT, T1 / T4

$$I_C = f(V_{CE})$$


$$T_{vj} = 150 \text{ °C}$$

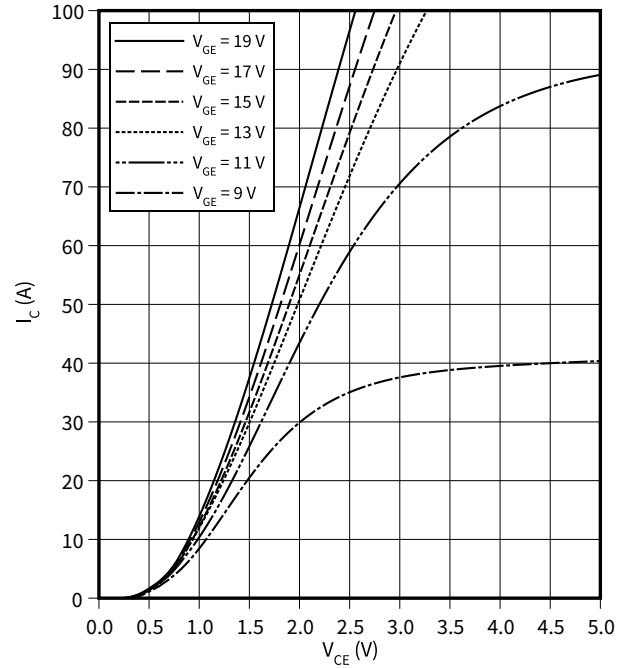

Transfer characteristic (typical), IGBT, T1 / T4

$$I_C = f(V_{GE})$$


$$V_{CE} = 20 \text{ V}$$

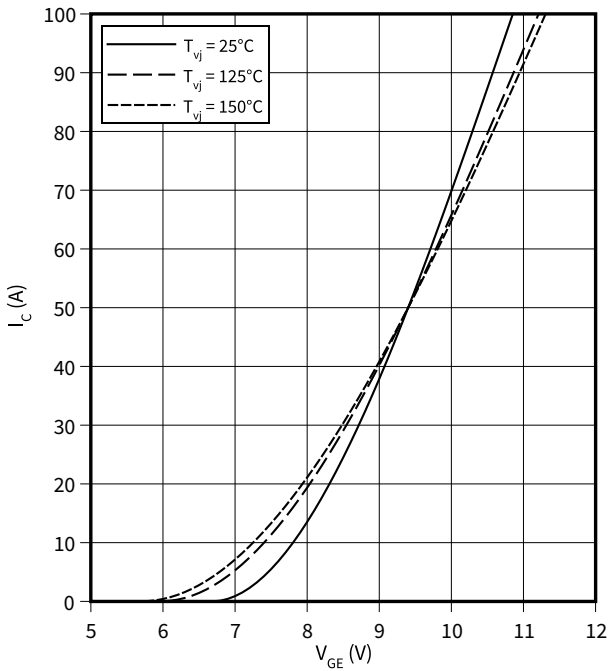

Switching losses (typical), IGBT, T1 / T4

$$E = f(I_C)$$

$$R_{Goff} = 2.2 \text{ } \Omega, R_{Gon} = 2.2 \text{ } \Omega, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}$$

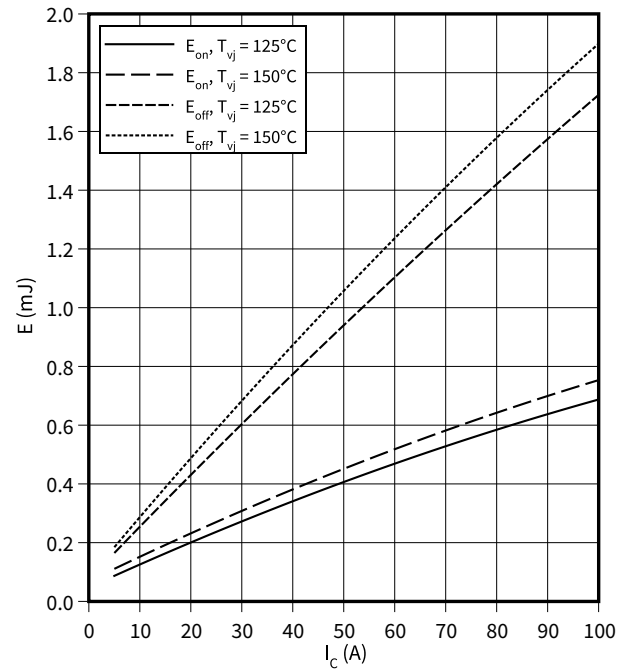


7 Characteristics diagrams

Switching losses (typical), IGBT, T1 / T4

$E = f(R_G)$


$I_C = 50 \text{ A}, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}$

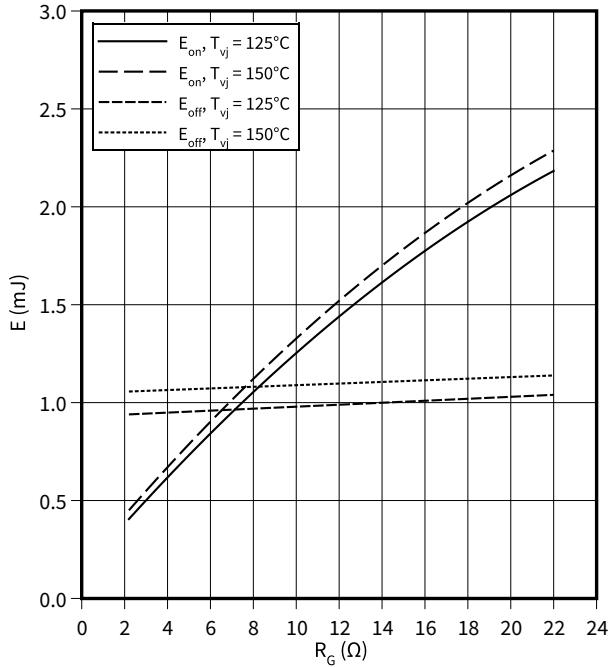

Switching times (typical), IGBT, T1 / T4

$t = f(I_C)$


$R_{Goff} = 2.2 \Omega, R_{Gon} = 2.2 \Omega, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 150 \text{ °C}$

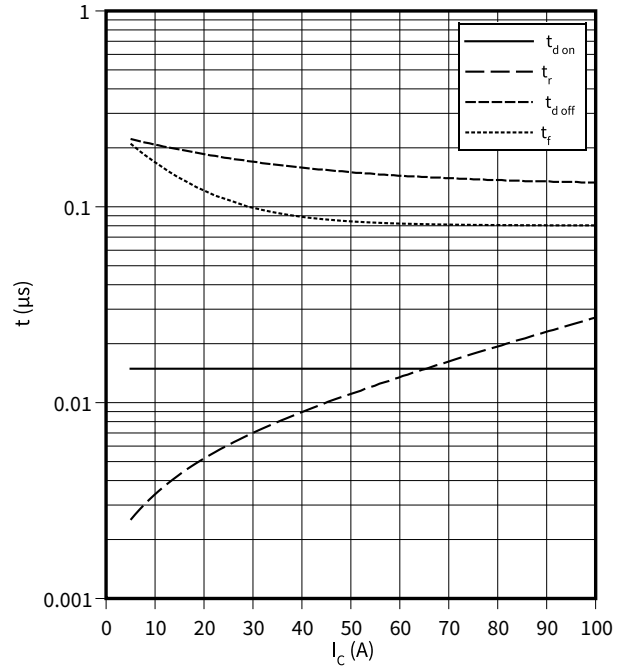

Switching times (typical), IGBT, T1 / T4


$t = f(R_G)$

$I_C = 50 \text{ A}, V_{CE} = 300 \text{ V}, V_{GE} = \pm 15 \text{ V}, T_{vj} = 150 \text{ °C}$

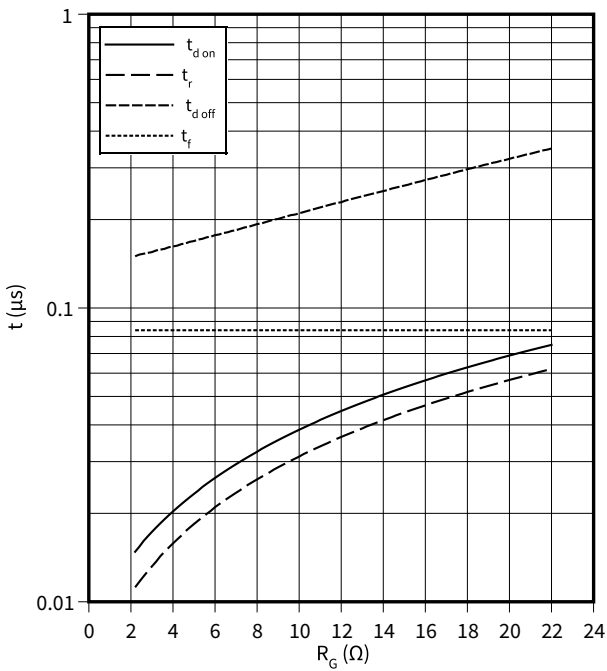

Transient thermal impedance, IGBT, T1 / T4

$Z_{th} = f(t)$

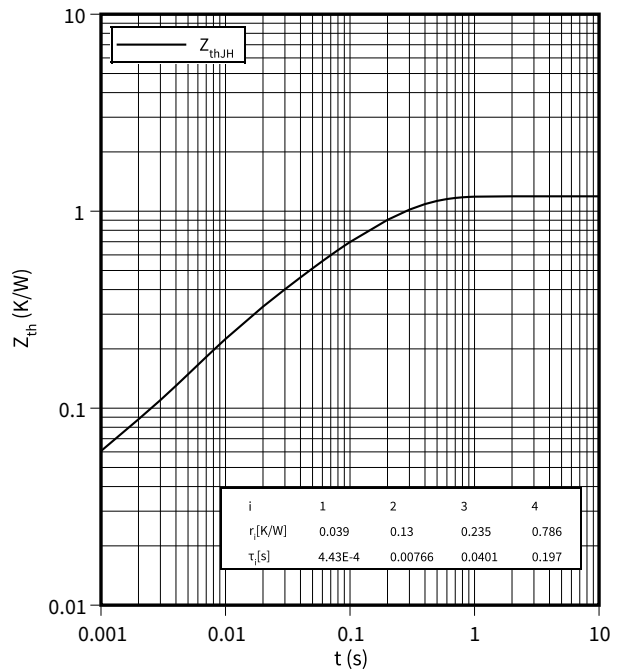


7 Characteristics diagrams

Reverse bias safe operating area (RBSOA), IGBT, T1 / T4


$I_C = f(V_{CE})$

$R_{Goff} = 2.2 \Omega$, $V_{GE} = \pm 15 \text{ V}$, $T_{vj} = 150 \text{ }^\circ\text{C}$

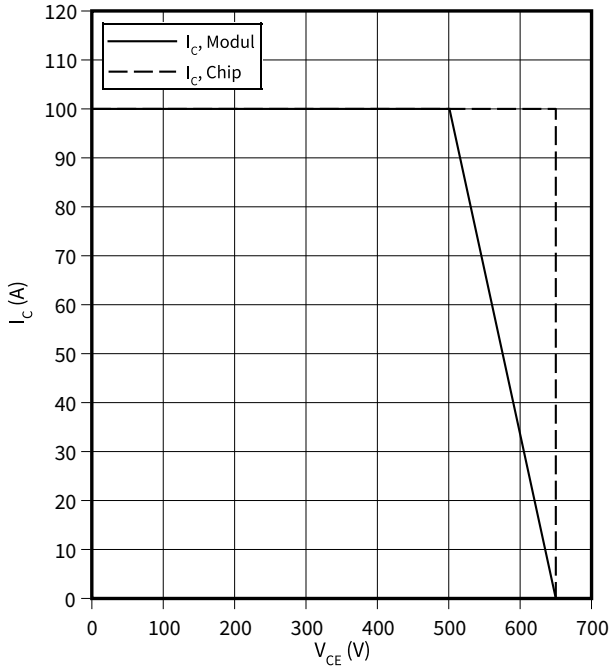


Forward characteristic (typical), Diode, D1 / D4

$I_F = f(V_F)$

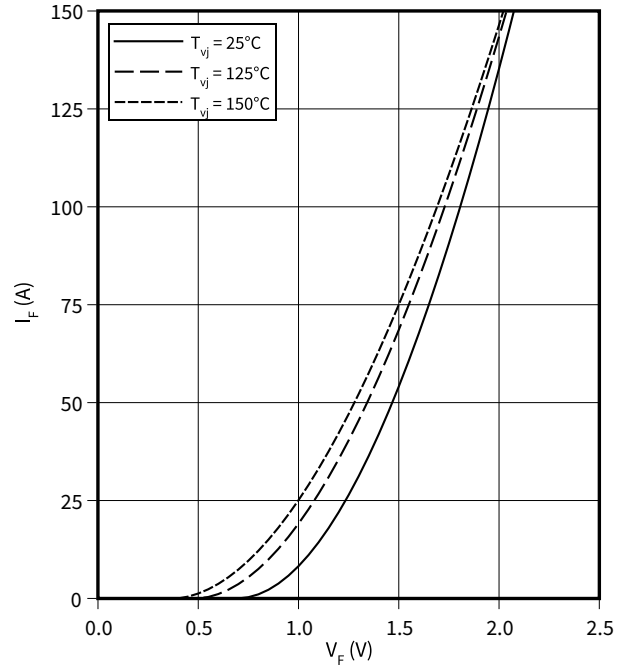

Transient thermal impedance, Diode, D1 / D4


$Z_{th} = f(t)$

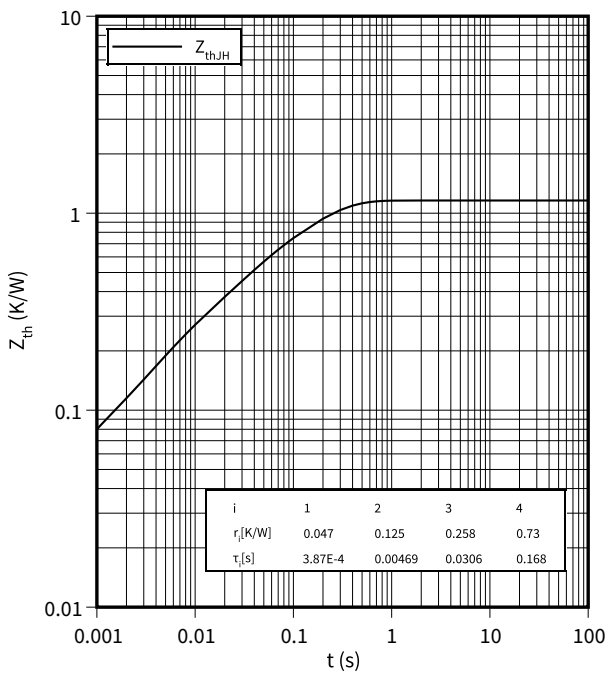

Switching losses (typical), Diode, D1 / D4

$E_{rec} = f(I_F)$

$R_{Gon} = 2.2 \Omega$, $V_{CE} = 300 \text{ V}$

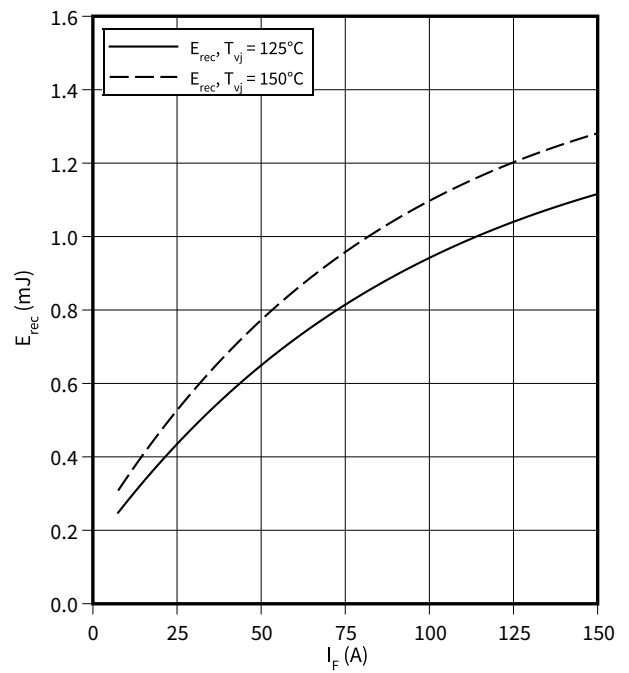


7 Characteristics diagrams

Switching losses (typical), Diode, D1 / D4

$E_{rec} = f(R_G)$


$V_{CE} = 300\text{ V}, I_F = 75\text{ A}$

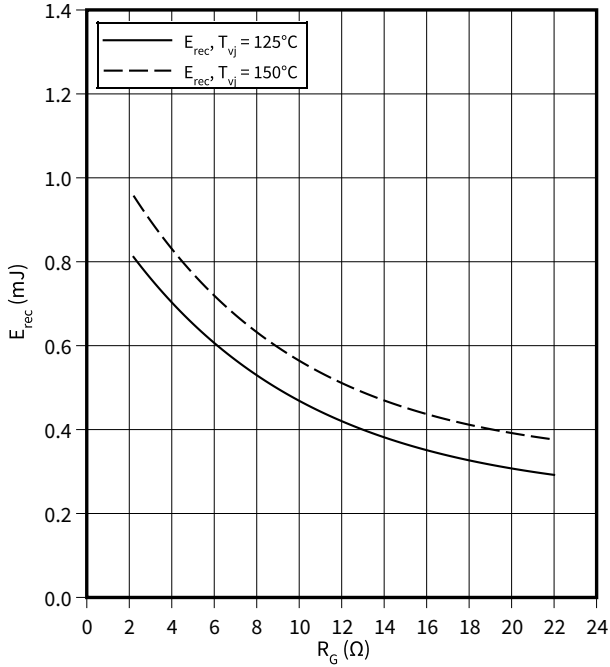

Output characteristic (typical), IGBT, T2 / T3

$I_C = f(V_{CE})$


$V_{GE} = 15\text{ V}$

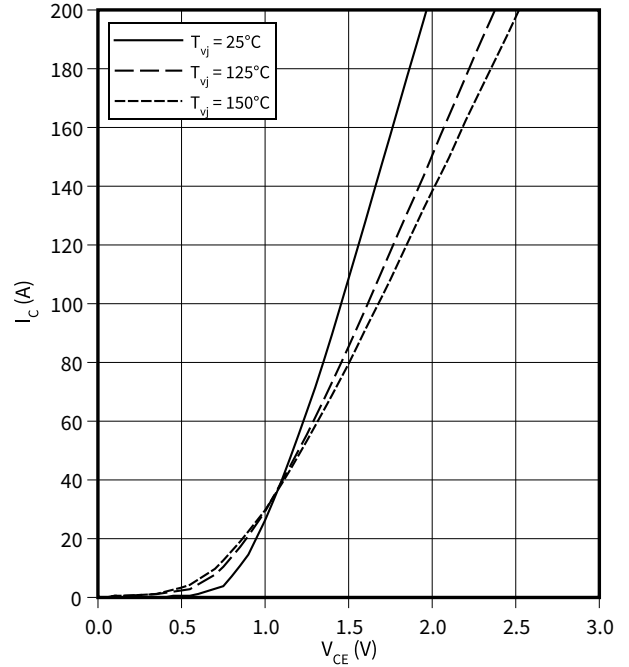

Output characteristic field (typical), IGBT, T2 / T3

$I_C = f(V_{CE})$


$T_{vj} = 150\text{ °C}$

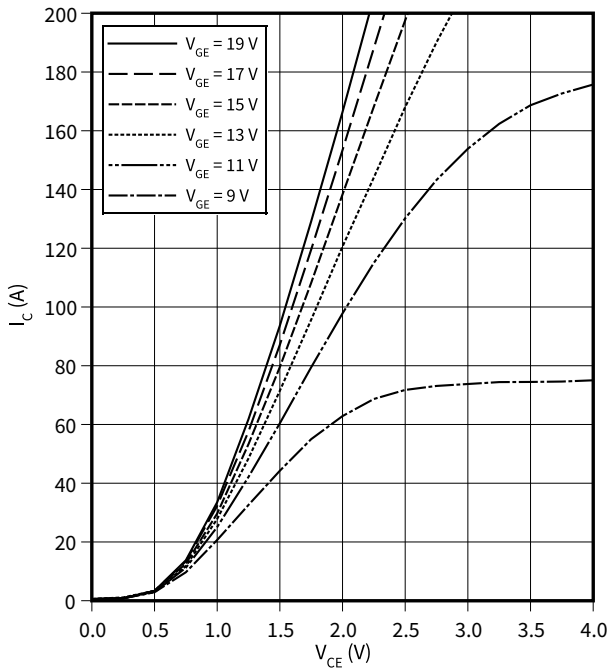

Transfer characteristic (typical), IGBT, T2 / T3

$I_C = f(V_{GE})$

$V_{CE} = 20\text{ V}$

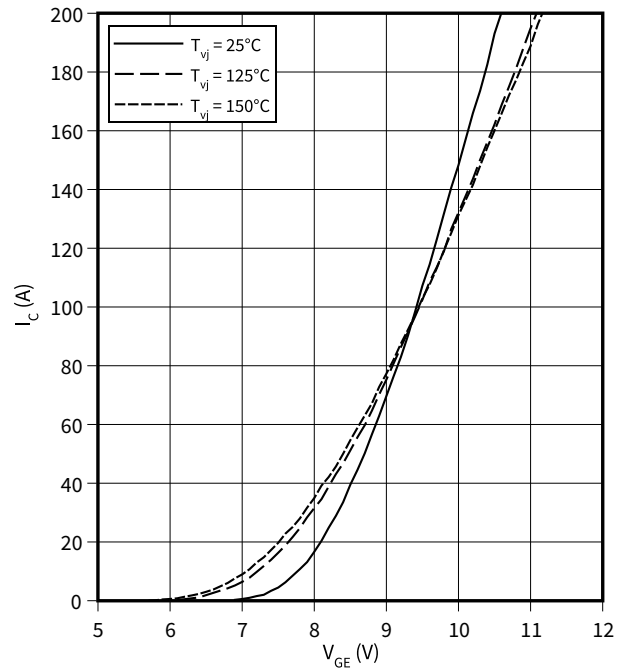


7 Characteristics diagrams

Switching losses (typical), IGBT, T2 / T3

$E = f(I_C)$


$R_{Goff} = 2.2 \Omega$, $R_{Gon} = 2.2 \Omega$, $V_{CE} = 300 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$

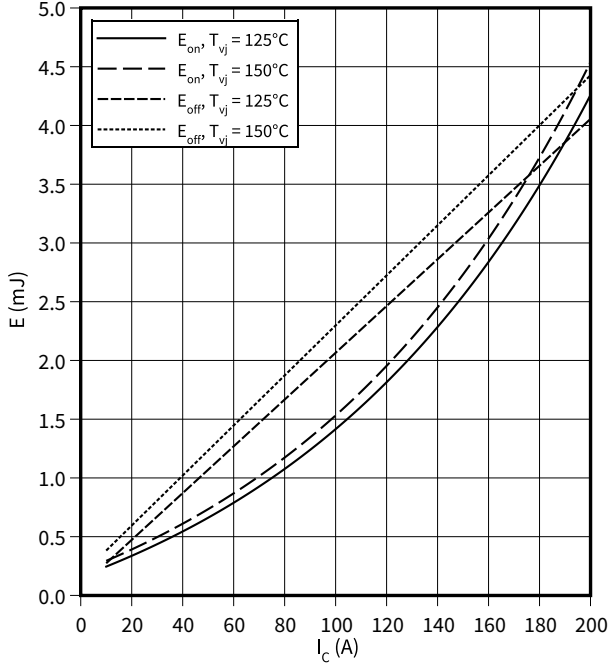

Switching losses (typical), IGBT, T2 / T3

$E = f(R_G)$


$I_C = 100 \text{ A}$, $V_{CE} = 300 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$

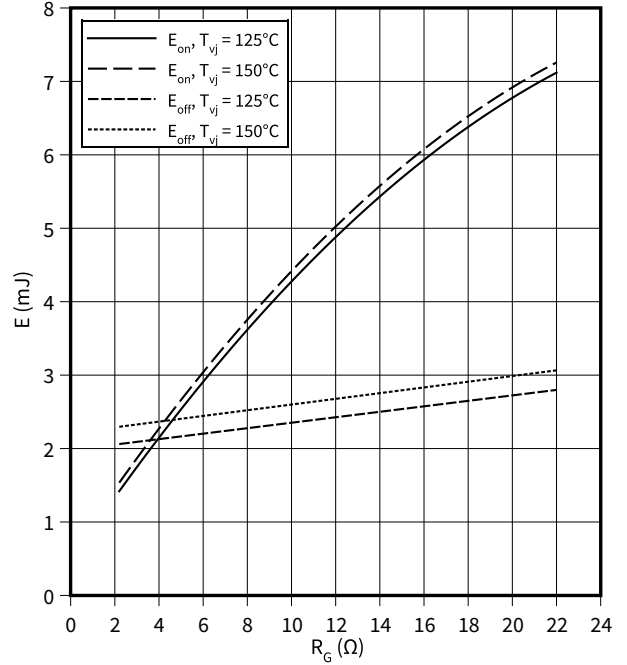

Switching times (typical), IGBT, T2 / T3

$t = f(I_C)$


$R_{Goff} = 2.2 \Omega$, $R_{Gon} = 2.2 \Omega$, $V_{CE} = 300 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$, $T_{vj} = 150 \text{ °C}$

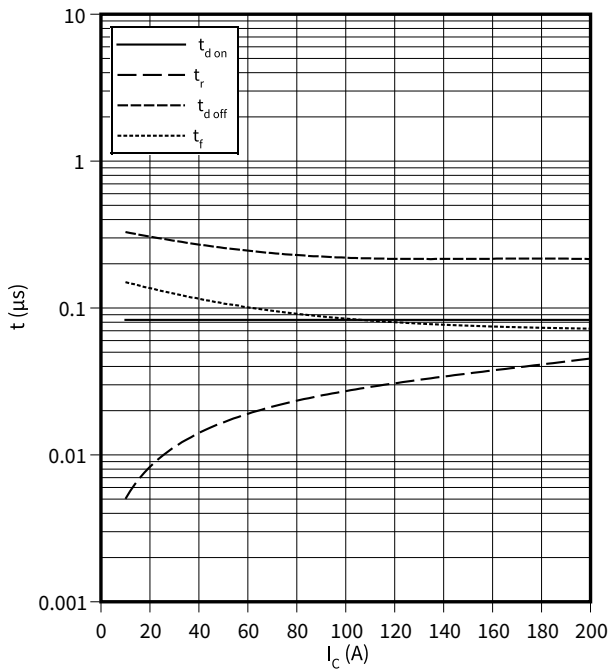

Switching times (typical), IGBT, T2 / T3

$t = f(R_G)$


$I_C = 100 \text{ A}$, $V_{CE} = 300 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$, $T_{vj} = 150 \text{ °C}$

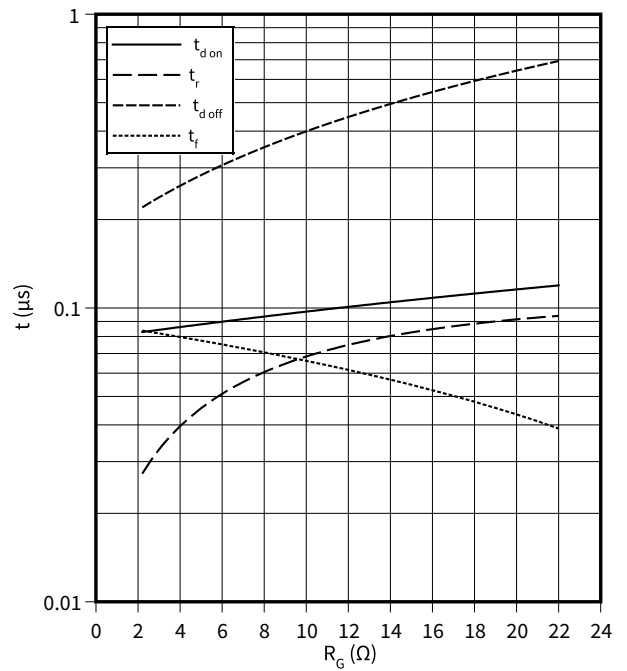

7 Characteristics diagrams

Transient thermal impedance, IGBT, T2 / T3


$Z_{th} = f(t)$

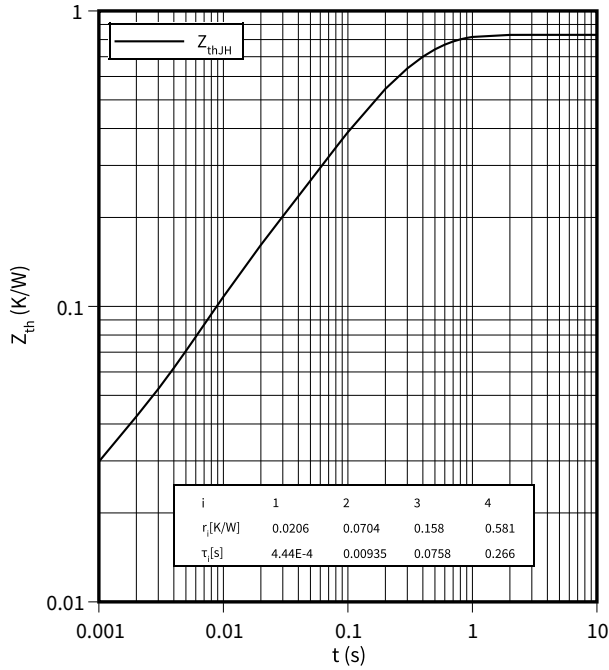

Reverse bias safe operating area (RBSOA), IGBT, T2 / T3


$I_C = f(V_{CE})$

$R_{Goff} = 2.2 \Omega, V_{GE} = \pm 15 V, T_{vj} = 150 \text{ }^\circ\text{C}$

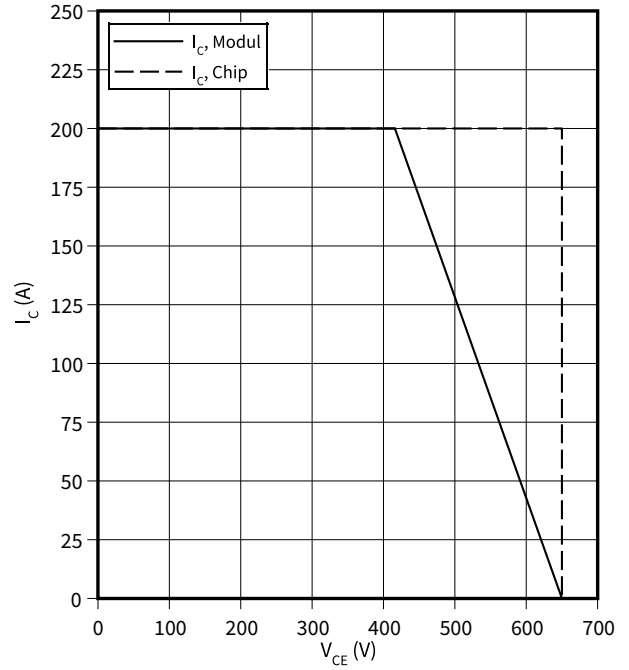


Forward characteristic (typical), Diode, D2 / D3

$I_F = f(V_F)$

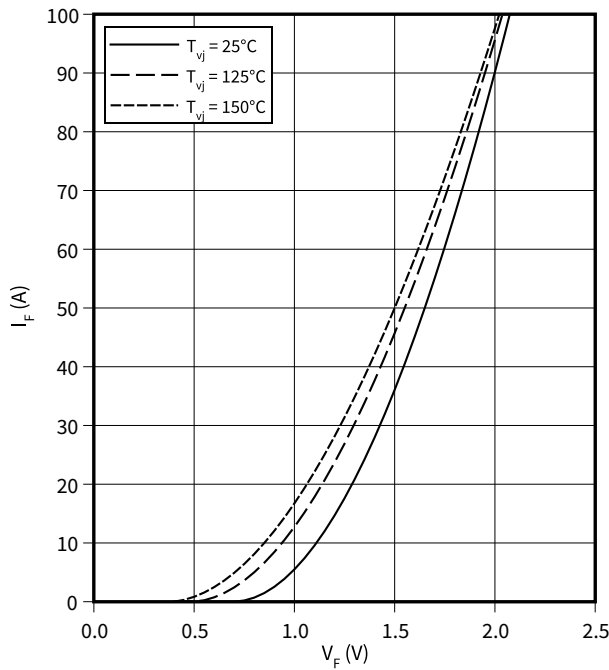

Transient thermal impedance, Diode, D2 / D3

$Z_{th} = f(t)$

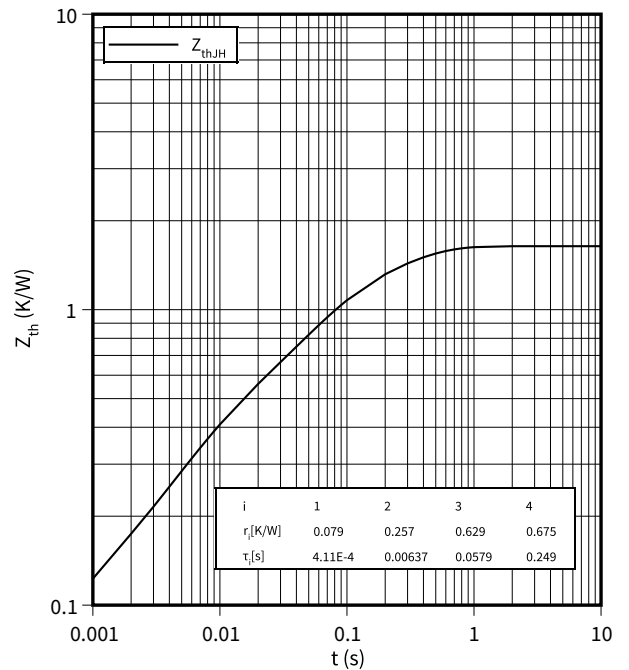


7 Characteristics diagrams

Switching losses (typical), Diode, D2 / D3

$E_{rec} = f(I_F)$


$R_{Gon} = 2.2 \Omega, V_{CE} = 300 V$

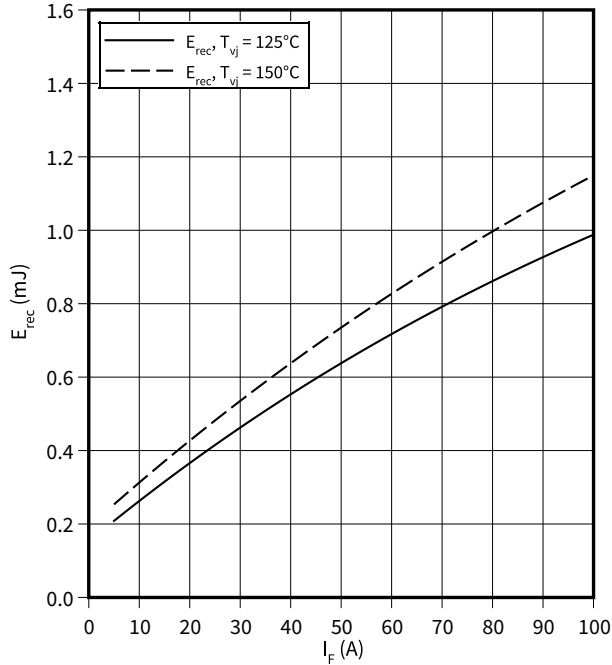

Switching losses (typical), Diode, D2 / D3


$E_{rec} = f(R_G)$

$V_{CE} = 300 V, I_F = 50 A$

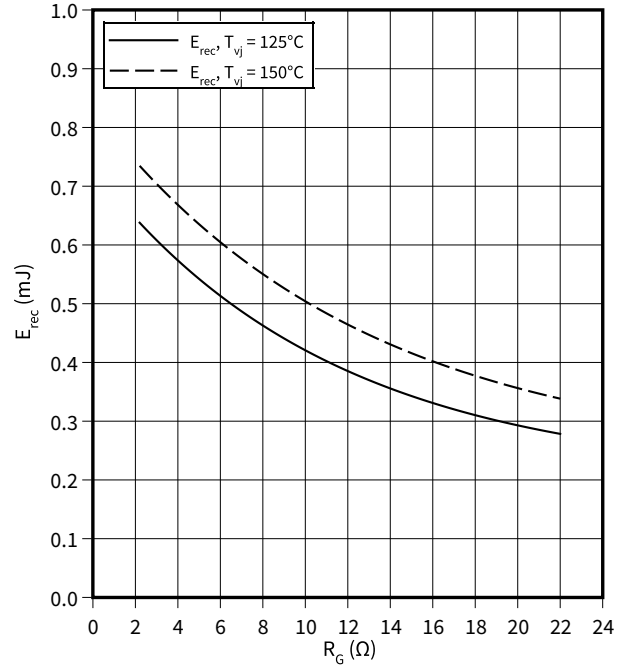

Temperature characteristic (typical), NTC-Thermistor

$R = f(T_{NTC})$

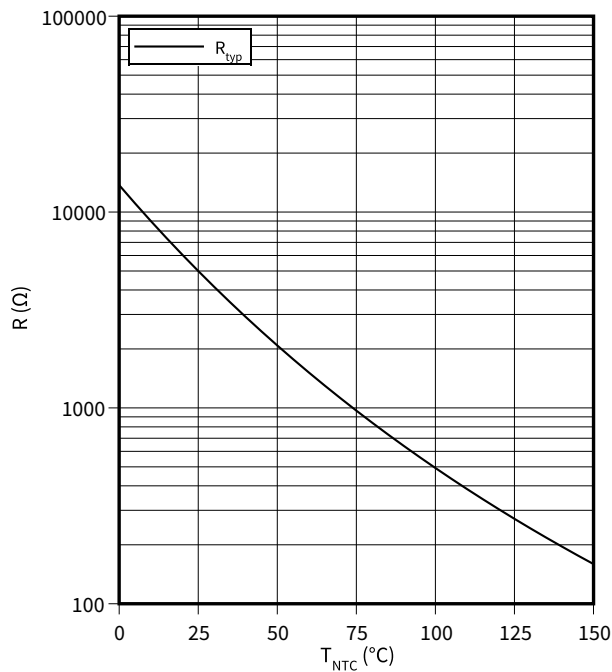

8 Circuit diagram

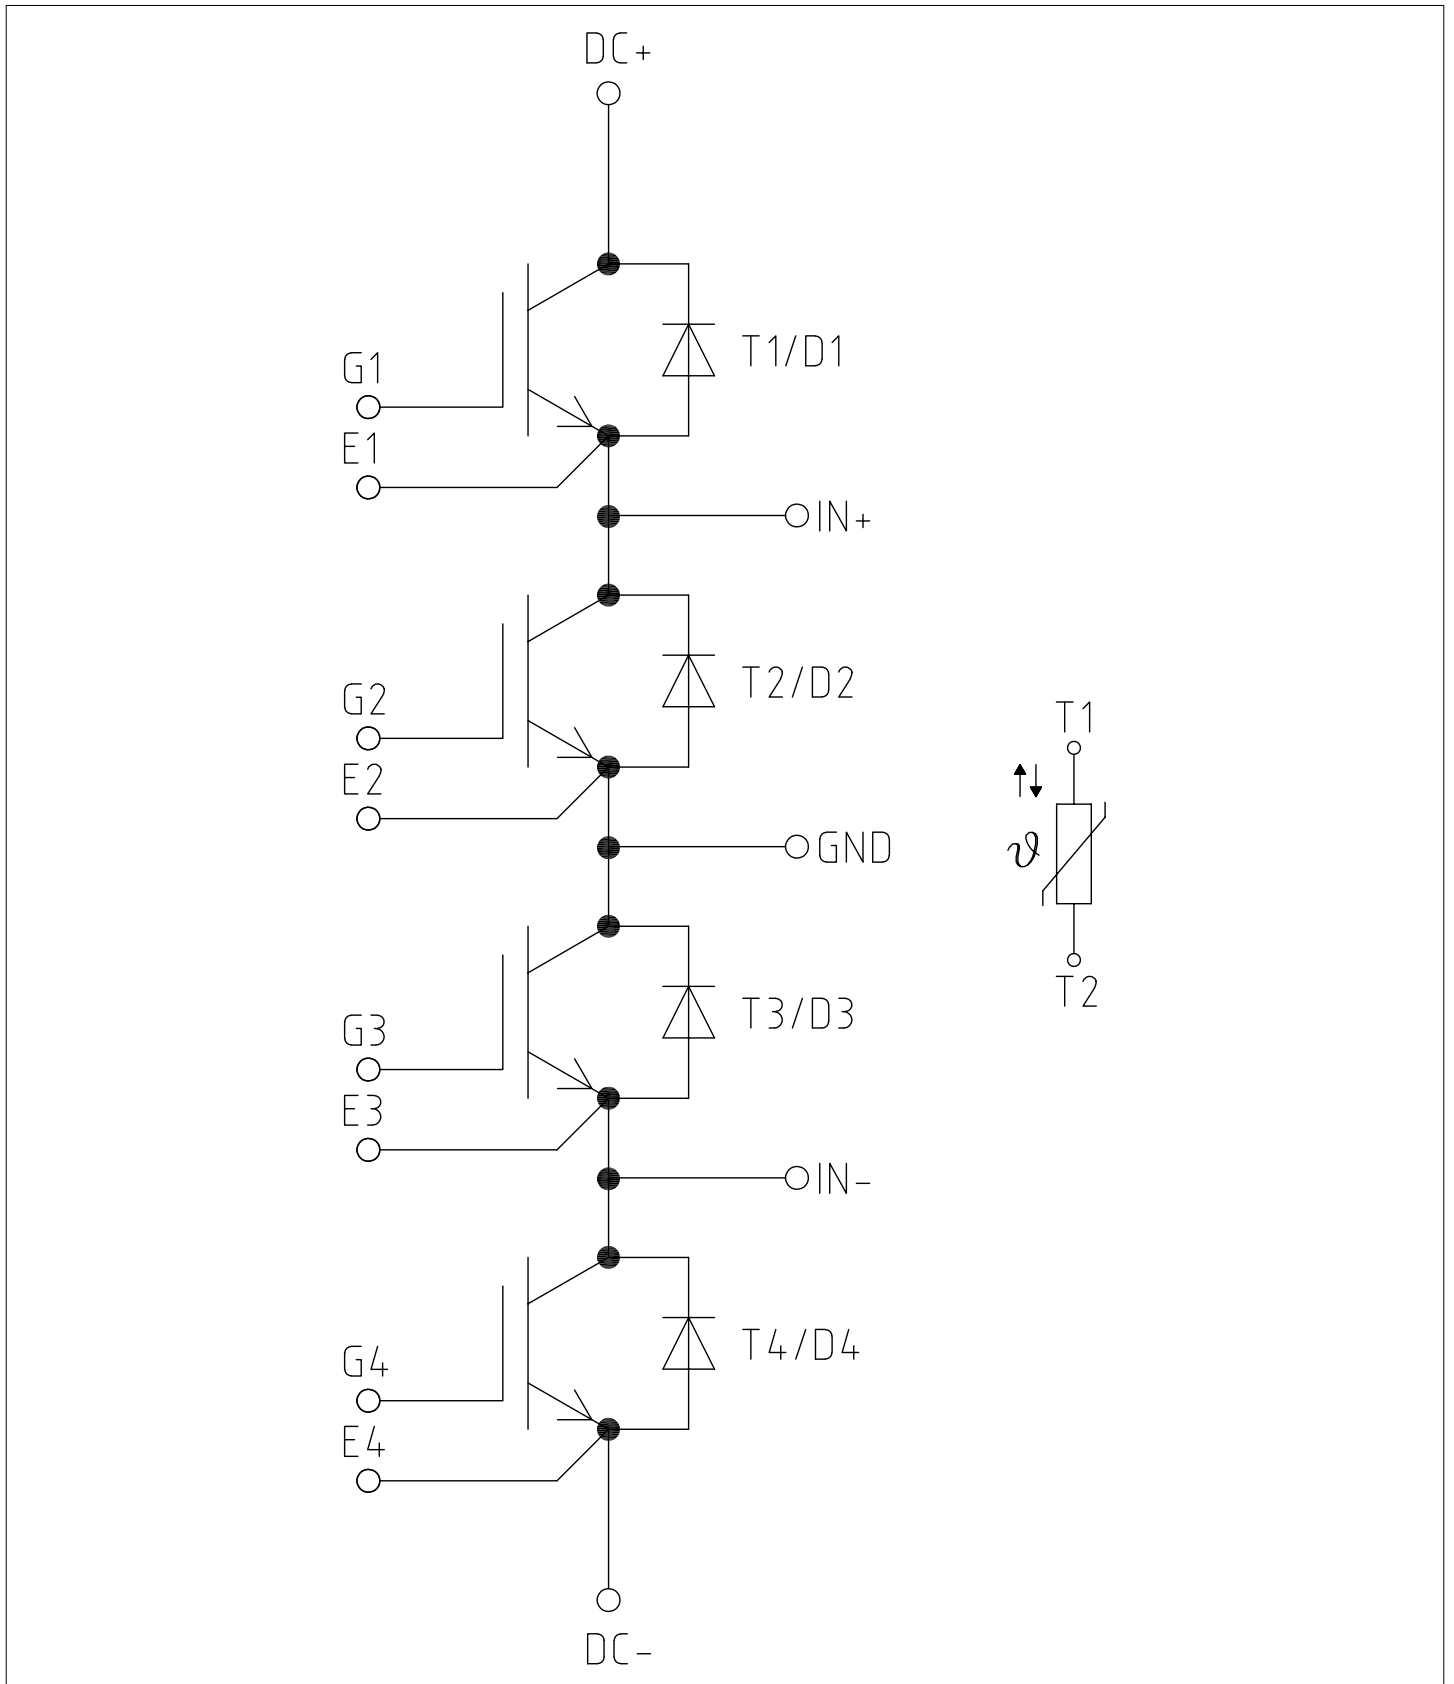


Figure 1

9 Package outlines

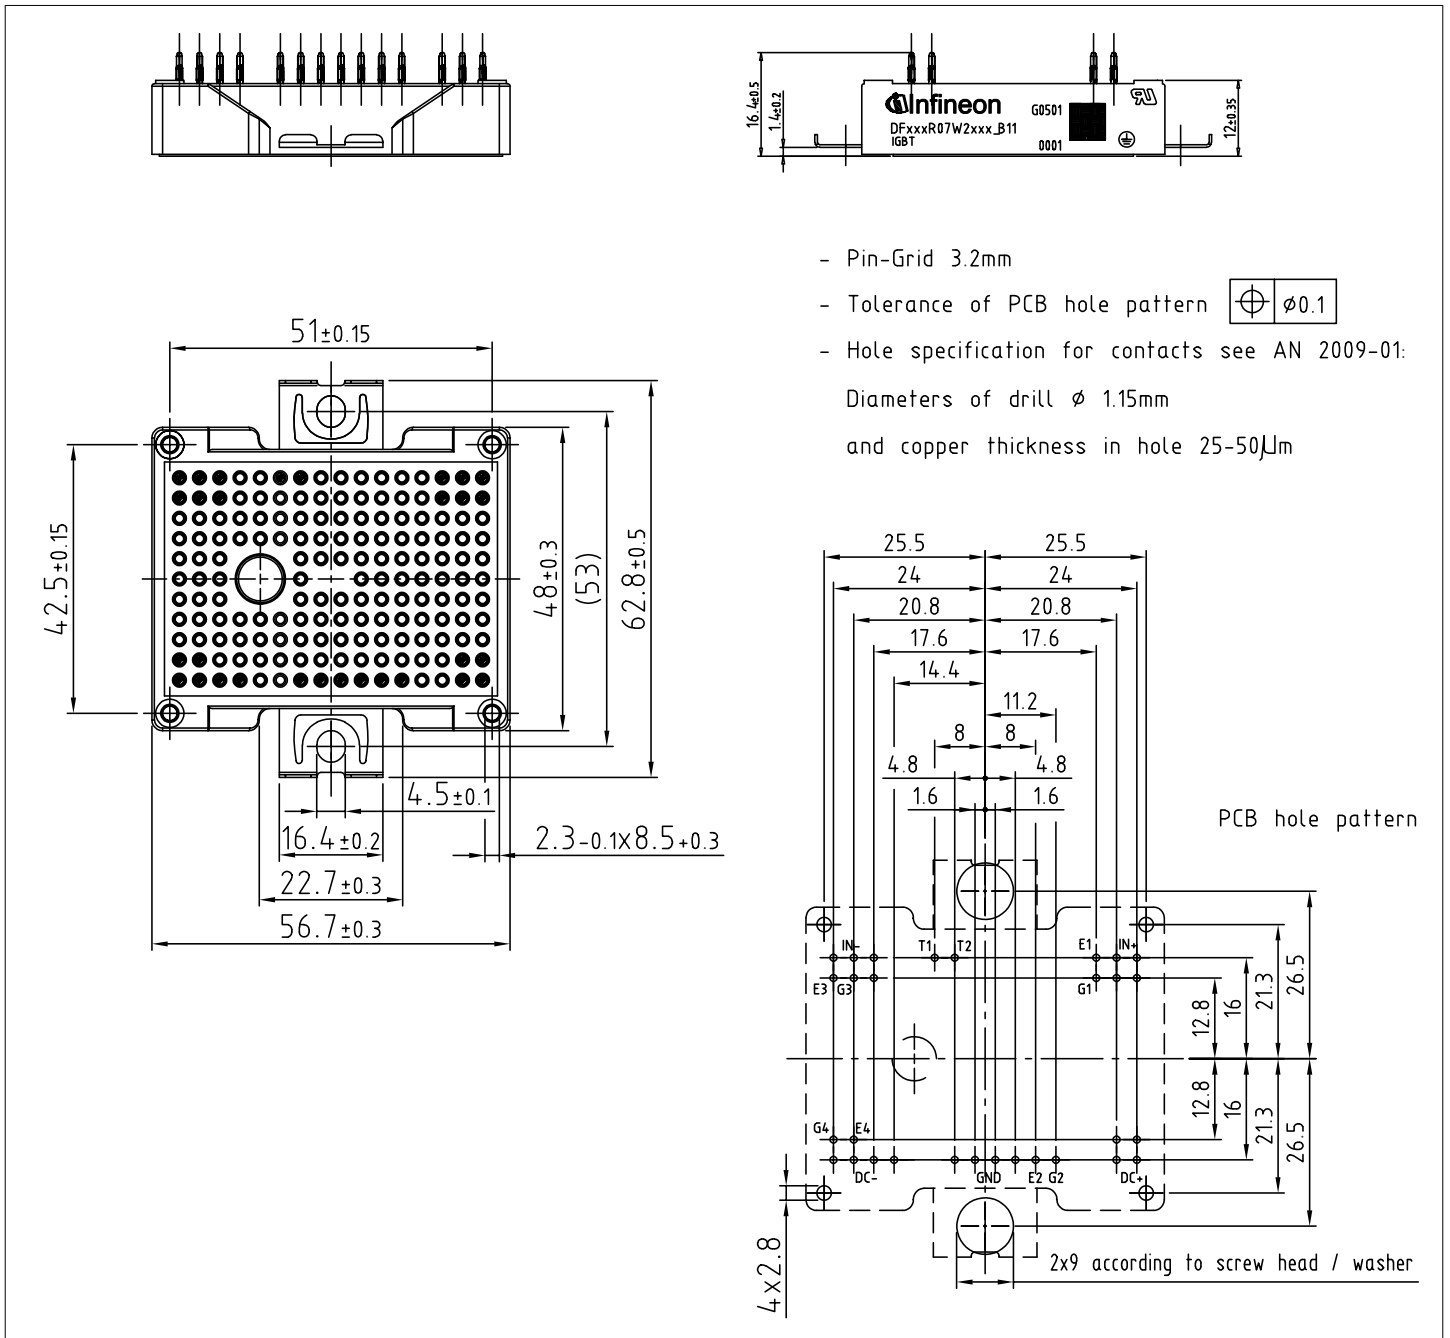


Figure 2

10 Module label code



Module label code			
Code format	Data Matrix	Barcode Code128	
Encoding	ASCII text	Code Set A	
Symbol size	16x16	23 digits	
Standard	IEC24720 and IEC16022	IEC8859-1	
Code content	<i>Content</i>	<i>Digit</i>	<i>Example</i>
	Module serial number	1 - 5	71549
	Module material number	6 - 11	142846
	Production order number	12 - 19	55054991
	Date code (production year)	20 - 21	15
	Date code (production week)	22 - 23	30
Example	 		
	71549142846550549911530		71549142846550549911530

Figure 3

Revision history

Document revision	Date of release	Description of changes
0.10	2021-06-30	Target datasheet
1.00	2021-11-15	Final datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-11-15

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2021 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

IFX-AAU256-002

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.