

**40V HIGH CURRENT LOW LEAKAGE SCHOTTKY DIODE**
**Product Summary**

$V_R$ (V)	$I_O$ (A)	$V_{F(MAX)}$ @ 1A (V)	$I_{R(MAX)}$ @ $V_R=30V$ ( $\mu A$ )
40	1.16	0.56	20

**Features and Benefits**

- Low Equivalent on Resistance
- Extremely Low Leakage (Typically 6 $\mu A$  @30V)
- High Current Capability ( $I_F = 1.16A$ )
- Low  $V_F$ , Fast Switching Schottky
- SOT23 Package
- ZLLS1000Q Complements Low Temperature Equivalent ZHCS1000Q
- Package Thermally Rated to +150°C
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **Qualified to AEC-Q101 Standards for High Reliability**
- **PPAP Capable (Note 4)**

**Applications**


- DC - DC Converters
- Strobes
- Mobile Phones
- Charging Circuits
- Motor Control

**Mechanical Data**


- Case: SOT23
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminals: Matte Tin Finish. Solderable per MIL-STD-202, Method 208
- Weight: 0.0089 grams (Approximate)



Top View



Device Symbol




Pinout – Top View

**Ordering Information (Note 5)**

Part Number	Compliance	Case	Packaging
ZLLS1000QTA	Automotive	SOT23	3000/Tape & Reel

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
  4. Automotive products are AEC-Q101 qualified and are PPAP capable. Refer to <https://www.diodes.com/quality/>.
  5. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

**Marking Information**


L10 = Product Type Marking Code



**Maximum Ratings** (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Continuous Reverse Voltage	V <sub>R</sub>	40	V
Average Rectified Output Current	I <sub>O</sub>	1.16	A
Peak Repetitive Forward Current Rectangular Pulse Duty Cycle 50% 100µs Pulse Width	I <sub>FPK</sub>	2.6	A
Non Repetitive Forward Current	I <sub>FSM</sub>	22	A
		6.4	A

**Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Power Dissipation @T <sub>A</sub> = +25°C	P <sub>D</sub>	0.8	W
Single Die Continuous		1.18	
Single Die Measured at t<5 secs			
Thermal Resistance Junction to Ambient (Note 6)	R <sub>θJA</sub>	155	°C/W
Thermal Resistance Junction to Ambient (Note 7)	R <sub>θJA</sub>	106	°C/W
Thermal Resistance Junction to Lead (Solder Point)	R <sub>θJL</sub>	80	°C/W
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C
Junction Temperature	T <sub>J</sub>	+150	°C


Notes: 6. For a device surface mounted on 25mm x 25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.  
7. For a device mounted on FRB PCB measured at t<5secs.

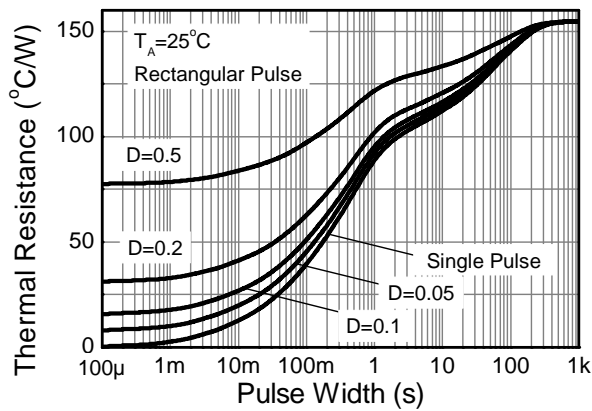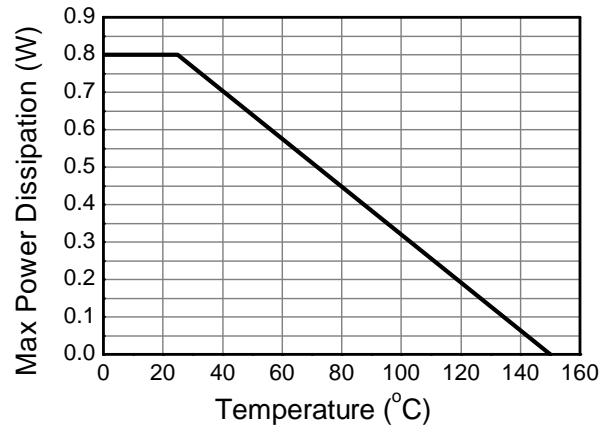**Thermal Characteristics and Derating information**

**Transient Thermal Impedance**

**Derating Curve**


**Electrical Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)

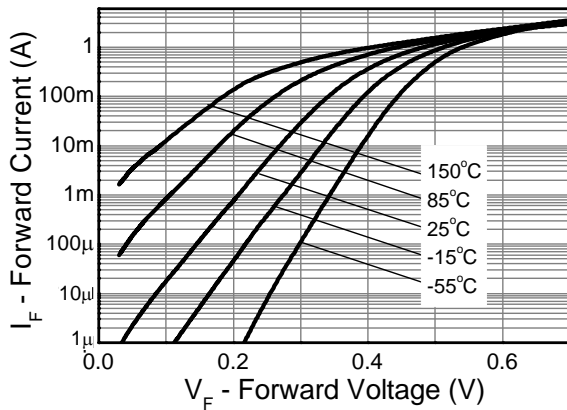Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage	V <sub>(BR)R</sub>	40	-	-	V	I <sub>R</sub> = 500μA
Forward Voltage (Note 8)	V <sub>F</sub>	-	320	355	mV	I <sub>F</sub> = 50mA
			335	380		I <sub>F</sub> = 100mA
			380	425		I <sub>F</sub> = 250mA
			410	460		I <sub>F</sub> = 500mA
			440	510		I <sub>F</sub> = 750mA
			470	560		I <sub>F</sub> = 1A
			530	660		I <sub>F</sub> = 1.5A
			430	-		I <sub>F</sub> = 1000mA, T <sub>A</sub> = +100°C
Reverse Current	I <sub>R</sub>	-	5 500	20 -	μA μA	V <sub>R</sub> = 30V V <sub>R</sub> = 30V, T <sub>A</sub> = +85°C
Diode Capacitance	C <sub>D</sub>	-	28	-	pF	f = 1MHz, V <sub>R</sub> = 30V
Reverse Recovery Time	t <sub>RR</sub>	-	5	-	ns	Switched from I <sub>F</sub> = 500mA to V <sub>R</sub> = 5.5V Measured @ I <sub>R</sub> = 50mA. di/dt = 500mA/ns.
Reverse Recovery Charge	Q <sub>RR</sub>	-	350	-	nC	R <sub>SOURCE</sub> = 6Ω; R <sub>LOAD</sub> = 10Ω


Note: 8. Measured under pulsed conditions. Pulse width = 300μs. Duty cycle < 2%




**Typical Forward Characteristics**

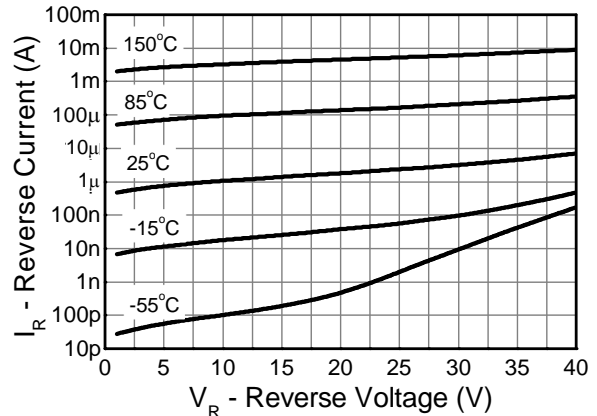


**Typical Reverse Characteristics**

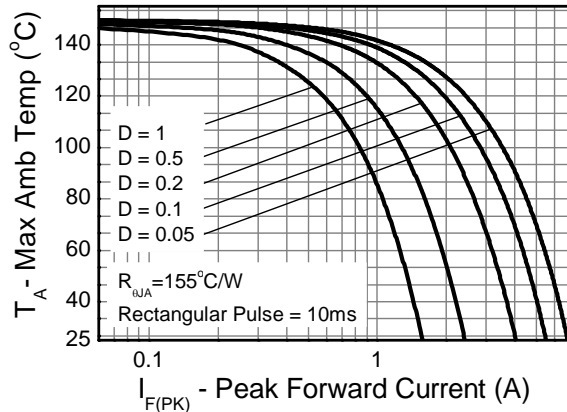


**Typical Forward Safe Operating Area**

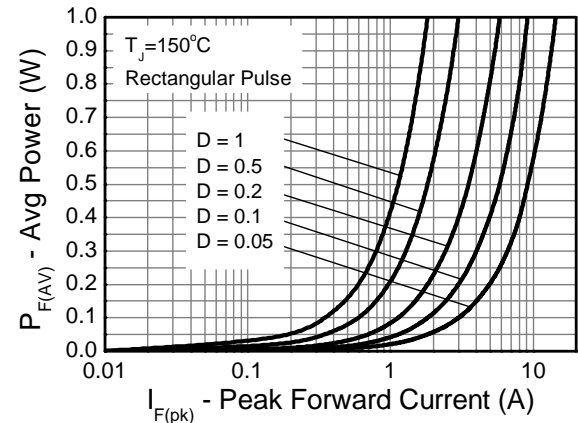

**Forward Power vs Peak Current**

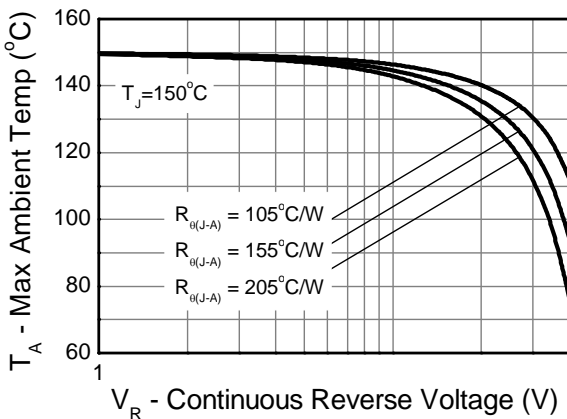

**Typical Reverse Safe Operating Area**

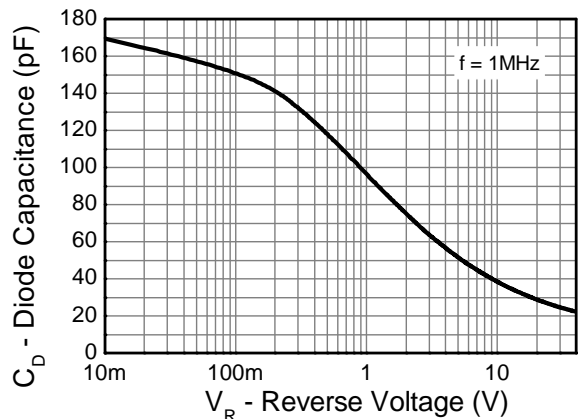


**Capacitance vs Reverse Voltage**

**Package Outline Dimensions**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SOT23**

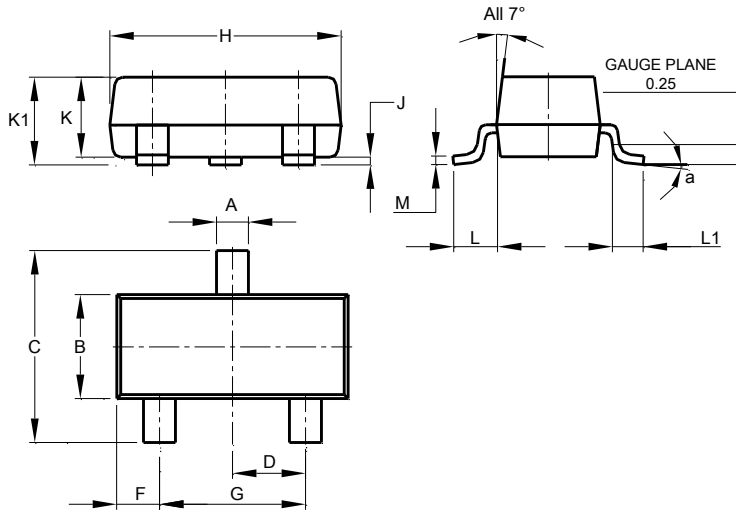


SOT23			
Dim	Min	Max	Typ
A	0.37	0.51	0.40
B	1.20	1.40	1.30
C	2.30	2.50	2.40
D	0.89	1.03	0.915
F	0.45	0.60	0.535
G	1.78	2.05	1.83
H	2.80	3.00	2.90
J	0.013	0.10	0.05
K	0.890	1.00	0.975
K1	0.903	1.10	1.025
L	0.45	0.61	0.55
L1	0.25	0.55	0.40
M	0.085	0.150	0.110
a	0°	8°	--
All Dimensions in mm			

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SOT23**

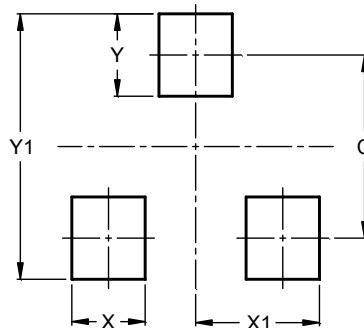

Dimensions	Value (in mm)
C	2.0
X	0.8
X1	1.35
Y	0.9
Y1	2.9

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)