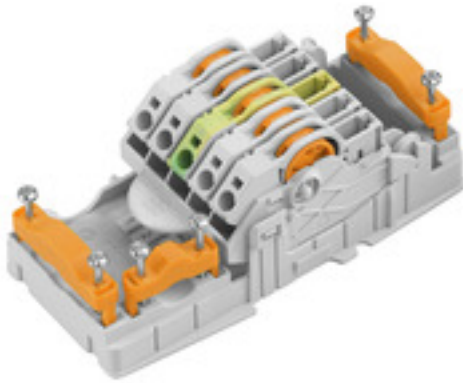


PT6 1-2-PE-3-4**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Power distribution using uncut cables with cross-sections from 1.5 to 6 mm².

Power supply / T-branch tap via PUSH IN connection (0.5 to 10 mm²) and/or plug-in connection (0.5 to 4 mm²).

Coloured markings provide clear assignment of wires.

- Power supply
- Power distribution
- Power branching

General ordering data

Order No.	2673470000
Type	PT6 1-2-PE-3-4
GTIN (EAN)	4050118703115
Qty.	1 pc(s).

PT6 1-2-PE-3-4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	54 mm	Depth (inches)	2.126 inch
Height	139.5 mm	Height (inches)	5.492 inch
Width	61.5 mm	Width (inches)	2.421 inch
Net weight	197 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...55 °C
---------------------	----------------	-----------------------	----------------

Clamping capacity, IDC connection - PT6

Blade size	0.6 x 3.5 mm	Connection cross-section, finely stranded, max.	6 mm ²
Connection cross-section, finely stranded, min.	2.5 mm ²	Connection cross-section, stranded, max.	6 mm ²
Connection cross-section, stranded, min.	2.5 mm ²	Wire connection cross section, finely stranded, max.	6 mm ²
Wire connection cross section, finely stranded, min.	2.5 mm ²	Wire cross-section, solid, max.	6 mm ²
Wire cross-section, solid, min.	1.5 mm ²		

Clamping capacity, PUSH IN connection - PT6

Blade size	0.6 x 3.5 mm	Blade size, PUSH IN connection	0.6 x 3.5 mm
Cross-section for connected wire PUSH IN connection, solid, min.	0.5 mm ²	Cross-section for connected wire, PUSH IN connection, solid, max.	6 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible, PUSH IN connection, max.	10 mm ²	Cross-section for connected wire, flexible, PUSH IN connection, min.	0.5 mm ²
Finely-stranded flexible, max. PUSH IN connection	6 mm ²	Finely-stranded flexible, min. PUSH IN connection	0.5 mm ²
Stripping length, PUSH IN connection	14 mm	Wire connection cross section, stranded, PUSH IN connection, max.	6 mm ²
Wire connection cross section, stranded, PUSH IN connection, min.	0.5 mm ²		

General data

Can be coded	Yes	Connection 2	PTS4 plug, PTDS4 plug
Material colour	grey	Protection degree	IP20
Silicone	No	Insulating material	PA
UL 94 flammability rating	V-0		

Creation date May 2, 2022 9:12:51 AM CEST

PT6 1-2-PE-3-4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data acc. to IEC

Rated cross-section	6 mm ²	Rated current	41 A
Rated impulse withstand voltage	8 kV	Rated voltage	800
Standards	UL 1059		

Rated data acc. to UL

Rated current (Use group D / UL 1059)	30 A	Rated voltage (Use group D / UL 1059)	600 V
Standards	UL 1059	Wire connection cross section AWG, max.	AWG 10
Wire connection cross section AWG, min.	AWG 14		

Classifications

ETIM 6.0	EC002498	ETIM 7.0	EC002498
ETIM 8.0	EC002498	ECLASS 9.0	27-14-25-90
ECLASS 9.1	27-14-25-90	ECLASS 10.0	27-14-25-90
ECLASS 11.0	27-14-25-90		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	UL Certificate FieldPower® terminals and plug-in connectors Manufacturer's Declaration FieldPower® BOX, BOX FUSE and Terminal variants
User Documentation	Manual FieldPower® PT6 IEC cURus
Catalogues	Catalogues in PDF-format

PT6 1-2-PE-3-4

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

