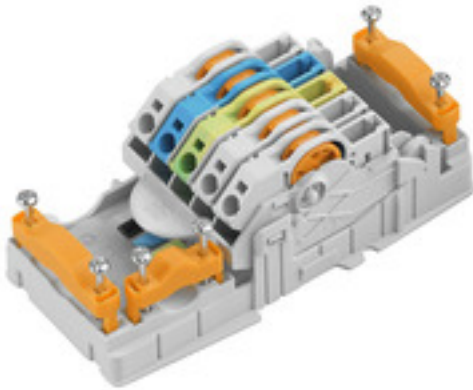


PT6 230/BUS**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Power distribution using uncut cables with cross-sections from 1.5 to 6 mm².

Power supply / T-branch tap via PUSH IN connection (0.5 to 10 mm²) and/or plug-in connection (0.5 to 4 mm²).

Coloured markings provide clear assignment of wires.

- Power supply
- Power distribution
- Power branching

General ordering data

Order No.	1269960000
Type	PT6 230/BUS
GTIN (EAN)	4050118058239
Qty.	1 pc(s).

PT6 230/BUS

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	54 mm	Depth (inches)	2.126 inch
Height	139.5 mm	Height (inches)	5.492 inch
Width	61.5 mm	Width (inches)	2.421 inch
Net weight	253 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...55 °C
---------------------	----------------	-----------------------	----------------

Clamping capacity, IDC connection - PT6

Blade size	0.6 x 3.5 mm	Connection cross-section, finely stranded, max.	6 mm ²
Connection cross-section, finely stranded, min.	2.5 mm ²	Connection cross-section, stranded, max.	6 mm ²
Connection cross-section, stranded, min.	2.5 mm ²	Wire connection cross section, finely stranded, max.	6 mm ²
Wire connection cross section, finely stranded, min.	2.5 mm ²	Wire cross-section, solid, max.	6 mm ²
Wire cross-section, solid, min.	1.5 mm ²		

Clamping capacity, PUSH IN connection - PT6

Blade size	0.6 x 3.5 mm	Blade size, PUSH IN connection	0.6 x 3.5 mm
Cross-section for connected wire PUSH IN connection, solid, min.	0.5 mm ²	Cross-section for connected wire, PUSH IN connection, solid, max.	6 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	6 mm ²	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm ²
Cross-section for connected wire, flexible, PUSH IN connection, max.	10 mm ²	Cross-section for connected wire, flexible, PUSH IN connection, min.	0.5 mm ²
Finely-stranded flexible, max. PUSH IN connection	6 mm ²	Finely-stranded flexible, min. PUSH IN connection	0.5 mm ²
Stripping length, PUSH IN connection	14 mm	Wire connection cross section, stranded, PUSH IN connection, max.	6 mm ²
Wire connection cross section, stranded, PUSH IN connection, min.	0.5 mm ²		

General data

Can be coded	Yes	Material colour	grey
Protection degree	IP20	Silicone	No
Insulating material	PA	UL 94 flammability rating	V-0

PT6 230/BUS

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data acc. to IEC

Rated cross-section	6 mm ²	Rated current	41 A
Rated impulse withstand voltage	8 kV	Rated voltage	800
Standards	UL 1059		

Rated data acc. to UL

Rated current (Use group D / UL 1059)	30 A	Rated voltage (Use group D / UL 1059)	600 V
Standards	UL 1059	Wire connection cross section AWG, max.	AWG 10
Wire connection cross section AWG, min.	AWG 14		

Classifications

ETIM 6.0	EC002498	ETIM 7.0	EC002498
ETIM 8.0	EC002498	ECLASS 9.0	27-14-25-90
ECLASS 9.1	27-14-25-90	ECLASS 10.0	27-14-25-90
ECLASS 11.0	27-14-25-90		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	UL Certificate FieldPower® terminals and plug-in connectors Manufacturer's Declaration FieldPower® BOX, BOX FUSE and Terminal variants
Engineering Data	CAD data – STEP
User Documentation	Manual FieldPower® Box
Catalogues	Catalogues in PDF-format

PT6 230/BUS

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

