



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE313C004I	2013-11-26	Tom_gu	Change Tolerance And Length





Conn. 2

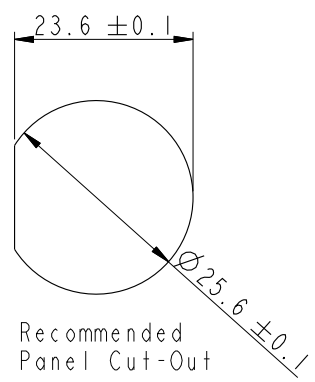

Recommended Panel Cut-Out

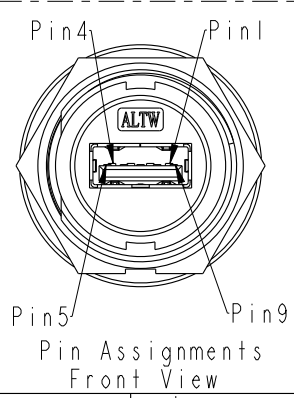

Pin Assignments Front View

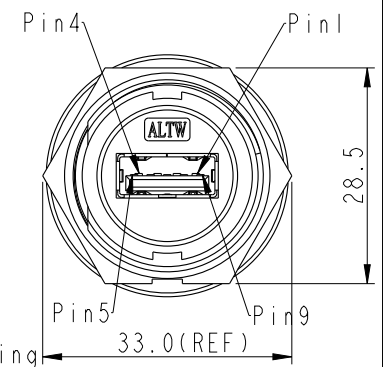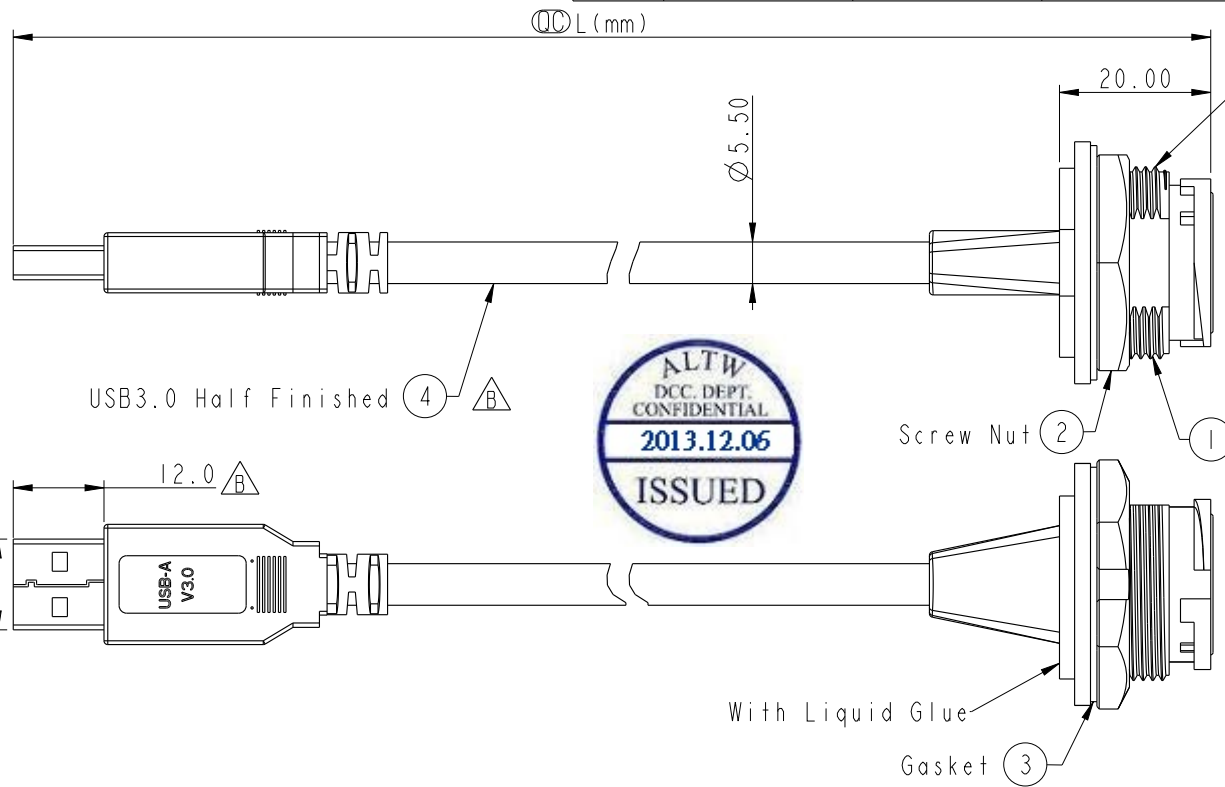

Conn. 1

Waterproof Rate: IP67

UA-30PMF-LD7B XX

XX	150~300mm
15	: 150mm
20	: 200mm
30	: 300mm

Cable Length(L): 150~300mm

- * Ⓢ Important Dimension.
- * Housing: ABS, Black
- * Screw Nut: Nylon+GF, Black
- * Gasket: Silicone, Gray
- * Jack: USB3.0-A Female Solder
- * Cable: USB 3.0, (IP*28#+D+Al/My)*2+IP*28#+2C*28#+F+Al+B, PVC Jacket, UV Resistant, OD=5.5mm, Black
- * Cable Length Tolerance: 150MM~300MM: ±15mm
- * Use with waterproof cap or dust cap
Panel Thickness max: 2.8mm
- * Use without waterproof cap or dust cap
Panel Thickness max: 4.0mm
- * All of Drain twisted together.

Shield	Braid	編織	Shield	
9	Orange	28AWG	橙	9
8	Purple	28AWG	紫	8
7	Drain	28AWG	地線	7
6	Yellow	28AWG	黃	6
5	Blue	28AWG	藍	5
	Drain	28AWG	地線	
4	Black	28AWG	黑	4
3	Green	28AWG	綠	3
2	White	28AWG	白	2
1	Red	28AWG	紅	1
Conn. 1	Wire Color		Conn. 2	
	Pin Out			

Amphenol LTW
安費諾亮泰企業股份有限公司

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE USB3.0 Female Lock To A Plug			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.1	QC: Inspection item	

ITEM NO	DRAWN BY Tom_gu	DATE 2013-11-26
DWG NO UA-30PMF-LD7BXX	CHECKED BY Mafei	DATE 2013-11-26
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-11-26