


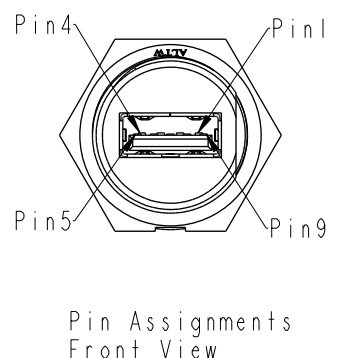

Shield	Braid	編織	Shield	Shield
9	Orange	28AWG 橙	SDP2+	9
8	Purple	28AWG 紫	SDP2-	8
7	Drain	28AWG	SDP2_Drain	7
6	Yellow	28AWG 黃	SDP1+	6
5	Blue	28AWG 藍	SDP1-	5
7	Drain	28AWG	SDP1_Drain	7
4	Black	28AWG 黑	GND_PWRrt	4
3	Green	28AWG 綠	UTP_D+	3
2	White	28AWG 白	UTP_D-	2
1	Red	28AWG 紅	PWR	1
Conn.1	Wire Color		Signal Name	Conn.2
Pin Out				

Gasket(

- * **Ⓢ** Important Dimension.
- * Housing: Thermoplastic, Black
- * Screw Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Jack: USB3.0-A Female Solder
- * Cable: UL2725 (1P*28#+DMA)*2C+1P*28#+2C*28#+ADB, PVC, UV Resistant, OD=6.0mm, Black
- * Cable Length Tolerance: 150~1000mm:±60mm
- * Use with waterproof cap or dust cap
Panel Thickness max: 2.8mm
- * Use without waterproof cap or dust cap
Panel Thickness max: 4.0mm
- * All of Drain twisted together.

15 : 150mm
20 : 200mm
30 : 300mm
50 : 500mm
A0 : 1000mm

TITLE USB, A TYPE, 3.0, FRONT FASTENED M, F, PNL W/PLUG, SCREW			
SCALE 1 : 1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. B.5	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2020-08-24
DWG NO	CHECKED BY	DATE
UA-30PMFL-SC7BXX	Rita	2020-08-24
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-08-24