

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Primary-switched STEP POWER power supply for DIN rail mounting, input: 1-phase, output: 5 V DC/2 A

---

## Product Description

STEP POWER power supplies for distribution boards

The STEP POWER power supply range was developed especially for building automation. The low idling losses and high degree of efficiency ensure maximum energy efficiency. They allow flexible use and can be snapped onto the DIN rail or screwed onto an even surface.

## Your advantages

- Flexible mounting by simply snapping onto the DIN rail or screwing onto a level surface
- Reliable power supply thanks to high MTBF (mean time between failures) of more than 500,000 hours and U/I characteristic curve
- Energy savings thanks to maximum energy efficiency and incredibly low idling losses

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2320513             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales Key                            | C14                 |
| Product Key                          | CMPS11              |
| Catalog Page                         | Page 282 (C-4-2019) |
| GTIN                                 | 4046356674744       |
| Weight per Piece (including packing) | 89 g                |
| Weight per Piece (excluding packing) | 86 g                |
| Customs tariff number                | 85044030            |
| Country of origin                    | VN                  |

## Technical Data

### Input data

#### AC operation

|                                          |                                               |
|------------------------------------------|-----------------------------------------------|
| Nominal input voltage range              | 100 V AC ... 240 V AC                         |
| Input voltage range                      | 85 V AC ... 264 V AC                          |
|                                          | 95 V DC ... 250 V DC                          |
| Input voltage range AC                   | 85 V AC ... 264 V AC                          |
| Input voltage range DC                   | 95 V DC ... 250 V DC                          |
| Voltage type of supply voltage           | AC/DC                                         |
| Inrush current                           | < 15 A                                        |
| Inrush current integral ( $I^2t$ )       | < 0.1 A <sup>2</sup> s                        |
| AC frequency range                       | 45 Hz ... 65 Hz                               |
| Frequency range DC                       | 0 Hz                                          |
| Mains buffering time                     | typ. 25 ms (120 V AC)                         |
|                                          | typ. 110 ms (230 V AC)                        |
| Current consumption                      | 0.2 A (120 V AC)                              |
|                                          | 0.13 A (230 V AC)                             |
| Nominal power consumption                | 28.9 VA                                       |
| Power factor (cos phi)                   | 0.44                                          |
| Typical response time                    | < 0.5 s                                       |
| Input fuse                               | 1.25 A (slow-blow, internal)                  |
| Permissible backup fuse                  | B6 B10 B16 AC:                                |
| Permissible DC backup fuse               | DC: Connect a suitable fuse upstream          |
| Recommended breaker for input protection | 6 A ... 16 A (AC: Characteristics B, C, D, K) |

### Output data

|                                                    |                                            |
|----------------------------------------------------|--------------------------------------------|
| Efficiency                                         | > 81 % (for 230 V AC and nominal values)   |
| Output characteristic                              | U/I                                        |
| Nominal output voltage                             | 5 V DC $\pm$ 1 %                           |
| Output current $I_{max}$                           | 3.7 A                                      |
| Nominal output current ( $I_N$ )                   | 2 A (-25°C ... 40°C permanent )            |
|                                                    | 2.2 A (-25 °C ... 55 °C)                   |
| Derating                                           | 55 °C ... 70 °C (2.5%/K)                   |
| Protection against overvoltage at the output (OVP) | < 10 V DC                                  |
| Residual ripple                                    | < 50 mV <sub>PP</sub>                      |
| Output power                                       | 10 W                                       |
| Maximum no-load power dissipation                  | < 0.4 W                                    |
| Power loss nominal load max.                       | < 2.6 W                                    |
| Connection in parallel                             | yes, for redundancy and increased capacity |
| Connection in series                               | yes                                        |

### Connection data

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 6.5 mm              |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.6 Nm              |
| Tightening torque max                 | 0.8 Nm              |

## Output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 6.5 mm              |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.6 Nm              |
| Tightening torque max                 | 0.8 Nm              |

## LED signaling

|                           |           |
|---------------------------|-----------|
| Types of signaling        | LED       |
| Operating voltage display | Green LED |

## Signal output: LED status indicator

|                        |                                    |
|------------------------|------------------------------------|
| Status display         | "DC OK" LED green                  |
| Note on status display | U <sub>OUT</sub> > 4 V: LED is lit |
| Color                  | green                              |
| Note on status display | LED on                             |

## Electrical properties

|                                 |                           |
|---------------------------------|---------------------------|
| Number of phases                | 1.00                      |
| Insulation voltage input/output | 4 kV AC (type test)       |
|                                 | 3.75 kV AC (routine test) |
| Insulation voltage output / PE  | 500 V DC (routine test)   |
| Insulation voltage input/output | 3.75 kV AC (routine test) |
|                                 | 4 kV AC (type test)       |
| Insulation voltage input / PE   | 3.5 kV AC (type test)     |
|                                 | 2 kV AC (routine test)    |

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Product properties

|                            |                     |
|----------------------------|---------------------|
| Product type               | Power supply        |
| MTBF (IEC 61709, SN 29500) | > 1812000 h (40 °C) |

### Insulation characteristics

|                      |                                |
|----------------------|--------------------------------|
| Protection class     | II (in closed control cabinet) |
| Overvoltage category | III                            |
| Degree of pollution  | 2                              |

## Dimensions

|                  |                                          |
|------------------|------------------------------------------|
| Width            | 18 mm                                    |
| Height           | 90 mm                                    |
| Depth            | 55 mm (Device depth (DIN rail mounting)) |
| Depth            | 61 mm                                    |
| Horizontal pitch | 1 Div.                                   |

### Installation dimensions

|                                  |               |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 30 mm / 30 mm |

## Mounting

|                       |                                                |
|-----------------------|------------------------------------------------|
| Mounting type         | DIN rail mounting                              |
| Assembly instructions | alignable: 0 mm horizontally, 30 mm vertically |
| Mounting position     | horizontal DIN rail NS 35, EN 60715            |

## Material specifications

|                     |                        |
|---------------------|------------------------|
| Foot latch material | POM (Polyoxymethylene) |
| Housing material    | Polycarbonate          |

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                                                            |
|------------------------------------------------|--------------------------------------------------------------------------------------------|
| Degree of protection                           | IP20                                                                                       |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 55° C derating : 2.5%/K)                                               |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                                                           |
| Climatic class                                 | 3K3 (in acc. with EN 60721)                                                                |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)                                                          |
| Shock                                          | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                          |
| Vibration (operation)                          | < 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6)<br>15 Hz ... 150 Hz, 2.3g, 90 min. |

## Standards and regulations

|                                                                                                                                  |                          |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Rail applications                                                                                                                | EN 50121-4               |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV) |

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

|                                                                                                                    |                                          |
|--------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Standard – Limitation of mains harmonic currents                                                                   | EN 61000-3-2                             |
| Standard - Electrical safety                                                                                       | IEC 62368-1 (SELV)                       |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178                                 |
| Standard – Safety extra-low voltage                                                                                | IEC 62368-1 (SELV) und EN 60204-1 (PELV) |
| Standard - Safe isolation                                                                                          | DIN VDE 0100-410                         |
| Standard - Safety of transformers                                                                                  | EN 61558-2-16                            |

## Approval data

|              |                               |
|--------------|-------------------------------|
| UL approvals | UL/C-UL listed UL 508         |
|              | UL/C-UL Recognized UL 60950-1 |
|              | NEC Class 2 as per UL 1310    |

## Conformity/Approvals

|                                  |   |
|----------------------------------|---|
| SIL in accordance with IEC 61508 | 0 |
|----------------------------------|---|

## EMC data

|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| Low Voltage Directive               | Conformance with Low Voltage Directive 2014/35/EC |
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU         |
| EMC requirements for noise emission | EN 61000-6-3                                      |
|                                     | EN 61000-6-4                                      |
| EMC requirements for noise immunity | EN 61000-6-1                                      |
|                                     | EN 61000-6-2                                      |
| Noise immunity                      | EN 61000-6-2:2005                                 |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                     |
|-------------------|---------------------|
| Contact discharge | 6 kV (Test Level 3) |
| Discharge in air  | 8 kV (Test Level 3) |
| Comments          | Criterion B         |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                  |
|---------------------|------------------|
| Frequency range     | 80 MHz ... 1 GHz |
| Test field strength | 10 V/m           |
| Frequency range     | 1 GHz ... 2 GHz  |
| Test field strength | 10 V/m           |
| Frequency range     | 2 GHz ... 3 GHz  |
| Test field strength | 10 V/m           |
| Comments            | Criterion A      |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Fast transients (burst)

|          |                                    |
|----------|------------------------------------|
| Input    | 4 kV (Test Level 4 - asymmetrical) |
| Output   | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion A                        |

## Surge voltage load (surge)

|                       |                                      |
|-----------------------|--------------------------------------|
| Standards/regulations | EN 61000-4-5                         |
| Input                 | 2 kV (Test Level 3 - symmetrical)    |
|                       | 4 kV (Test Level 4 - asymmetrical)   |
| Output                | 1 kV (Test Level 2 - symmetrical)    |
|                       | 0.5 kV (Test Level 1 - asymmetrical) |
| Comments              | Criterion A                          |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                 |                    |
|-----------------|--------------------|
| Frequency range | 10 kHz ... 15 kHz  |
| Comments        | Criterion A        |
| Voltage         | 3 V (Test Level 2) |

## Voltage dips

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

## Emitted interference

|                                                  |                                                                           |
|--------------------------------------------------|---------------------------------------------------------------------------|
| Standards/regulations                            | EN 61000-6-3                                                              |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) class B used in industry and residential area / EMC 1 |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) class B used in industry and residential area / EMC 1 |


# Power supply unit - STEP-PS/ 1AC/ 5DC/2

2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Drawings

Block diagram

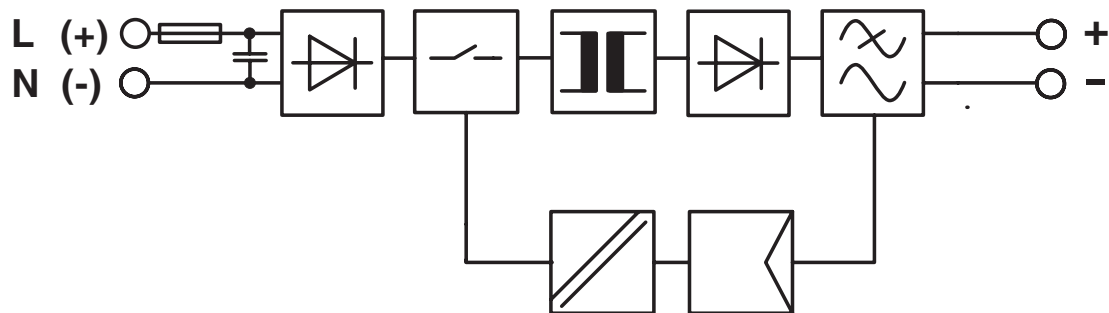

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Approvals



**cUL Recognized**  
Approval ID: FILE E 214596



**UL Recognized**  
Approval ID: FILE E 214596



**IECEE CB Scheme**  
Approval ID: DK-28573-UL



**EAC**  
Approval ID: EAC-Zulassung



**EAC**  
Approval ID: RU S-DE.BL08.W.00764



**UL Listed**  
Approval ID: FILE E 123528



**cUL Listed**  
Approval ID: FILE E 123528



**EAC**  
Approval ID: RU S-DE.BL08.W.00764

**cULus Recognized**

**cULus Listed**

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27040701 |
| ECLASS-10.0.1 | 27040701 |
| ECLASS-11.0   | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Environmental Product Compliance

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                               |
| China RoHS | Environmentally Friendly Use Period = 25;                                                                    |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

# Power supply unit - STEP-PS/ 1AC/ 5DC/2



2320513

<https://www.phoenixcontact.com/us/products/2320513>

## Accessories

### Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919

<https://www.phoenixcontact.com/us/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

---

### Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916

<https://www.phoenixcontact.com/us/products/2907916>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

---

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)