




RoHS Compliant

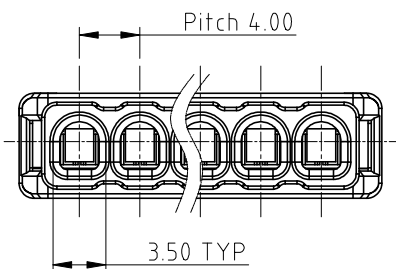



2P



3P

Electrical:

- Voltage rating: 300 V
- Current rating: 24 A
- Wire range(Solid wire AWG): 18-12 AWG
- Wire strip length: 11 mm
- Withstanding Voltage: 2.5KV
- Insulation Resistance: DV500V 500MΩ min
- Operating temperature: -40°C to +80°C
- Safety Approval: cULus

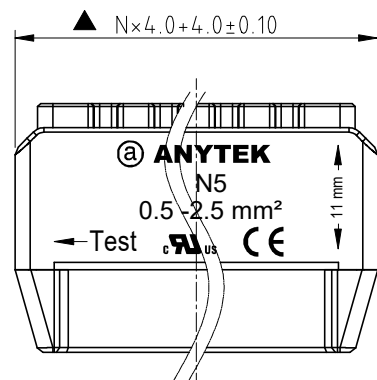

Part No. N5xx00x00000G



NO. OF POLES

- 02: 2 POLES
- 03: 3 POLES
- 04: 4 POLES
- 05: 5 POLES

Body Color:

- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)

RoHS compliant
(lead<4%)
In copper Alloy

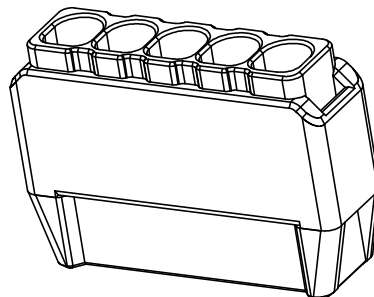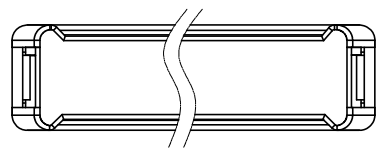

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		N5 Series ,pitch 4.00mm,T=6.95				
PART NO.	N5xx00x00000G			DWG NO.	8N50001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		LENA 2021.01.07	LENA 2021.01.07			
					UNIT: mm	X. ±0.50
					SCALE: 2:1	X.X ±0.30
				SHEET: 01/01	REV.: A0	X° ±1°