

RUGGED STEEL BATTERY HOLDERS



FIG. 1 STAINLESS STEEL BASE. INSULATOR TUBES SUPPLIED FOR 2-3-4 CELLS (END TO END)

- Ideal for NiCd, Alkaline, NiMH, Carbon, Zinc and Lithium Cells
- Corrosion Resistant, Nickel Plate
- Brass Contacts, Nickel Plate
- Moisture Proof Resin Impregnated, Fibre Insulating Washers

FIG. 2 STEEL BASE. LITHIUM (SINGLE CELL)



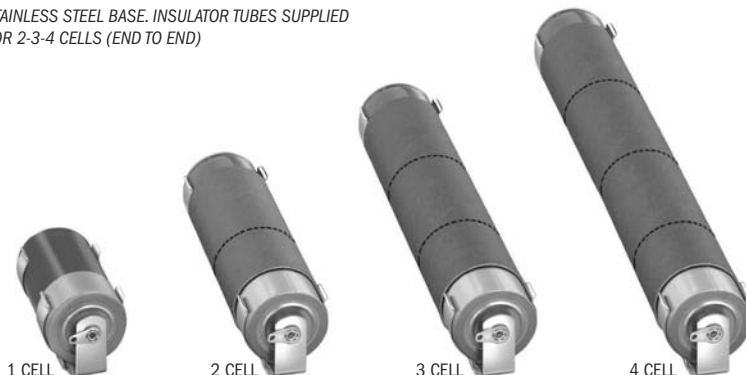


FIG. 3 PHENOLIC BASE FOR 2, 3, 4 CELLS (SIDE BY SIDE)

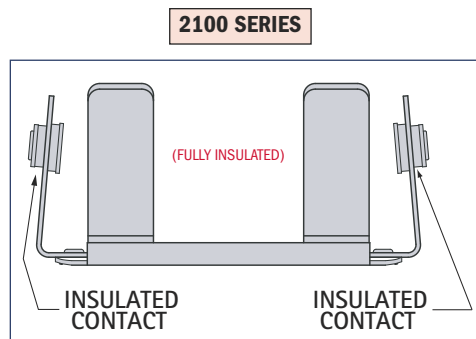

1100 SERIES	2100 SERIES	HOLDS NO. OF CELLS	FIG. NO.	BATTERY CROSS REFERENCE		
ONE CONTACT INSULATED	ALL CONTACTS INSULATED			IEC	ANSI/NEDA	BATTERY MANUFACTURERS
CAT. NO.	CAT. NO.					
“AA” CELL				$\left(\begin{array}{l} \text{BATTERY} \\ \text{SIZE} \end{array} \frac{.531}{.565} \begin{array}{l} (13.4) \\ (14.5) \end{array} \text{O.D.} \times \frac{1.906}{1.988} \begin{array}{l} (48.4) \\ (50.5) \end{array} \text{L} \right)$		
1139	2139	1	1	LR6	15A	Energizer, Duracell, Panasonic, Sanyo, Varta, Rayovac, Tadiran
—	2140*	2	3			
—	2171*	3	3			
—	2182*	4	3			
1189	2189	2	1			
1191	2191	3	1			
1194	2194	4	1			
“C” CELL				$\left(\begin{array}{l} \text{BATTERY} \\ \text{SIZE} \end{array} \frac{.875}{1.125} \begin{array}{l} (22.2) \\ (28.6) \end{array} \text{O.D.} \times \frac{1.875}{1.969} \begin{array}{l} (47.6) \\ (50.0) \end{array} \text{L} \right)$		
1173	2173	1	1	LR14	14A	Energizer, Duracell, Panasonic, Sanyo, Varta, Rayovac, Tadiran
—	2174*	2	3			
—	2187*	3	3			
—	2188*	4	3			
1185	2185	2	1			
1195	2195	3	1			
1198	2198	4	1			
“D” CELL				$\left(\begin{array}{l} \text{BATTERY} \\ \text{SIZE} \end{array} \frac{1.187}{1.375} \begin{array}{l} (30.1) \\ (34.9) \end{array} \text{O.D.} \times \frac{2.312}{2.412} \begin{array}{l} (58.7) \\ (61.3) \end{array} \text{L} \right)$		
1175	2175	1	1	LR20	13A	Energizer, Duracell, Panasonic, Sanyo, Varta, Rayovac, Tadiran
—	2176*	2	3			
—	2190*	3	3			
—	2192*	4	3			
1186	2186	2	1			
1199	2199	3	1			
1162	2162	4	1			
“1/2AA” LITHIUM CELL				$\left(\begin{array}{l} \text{BATTERY} \\ \text{SIZE} \end{array} \frac{.475}{.510} \begin{array}{l} (12.1) \\ (13.0) \end{array} \text{O.D.} \times \frac{.965}{.992} \begin{array}{l} (24.5) \\ (25.2) \end{array} \text{L} \right)$		
—	1103	1	2	CR11108	1406LC	Energizer 544, Duracell PX28L Panasonic CR14250

*Clips mounted on .062 (1.57) thick Phenolic board.

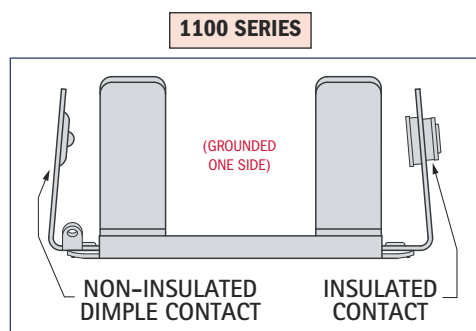

MODIFICATIONS

We welcome the opportunity to quote on variations of standard items. Use our engineering service for your custom-built holders. Holders with PC and Quick-Fit terminals available on special order.