
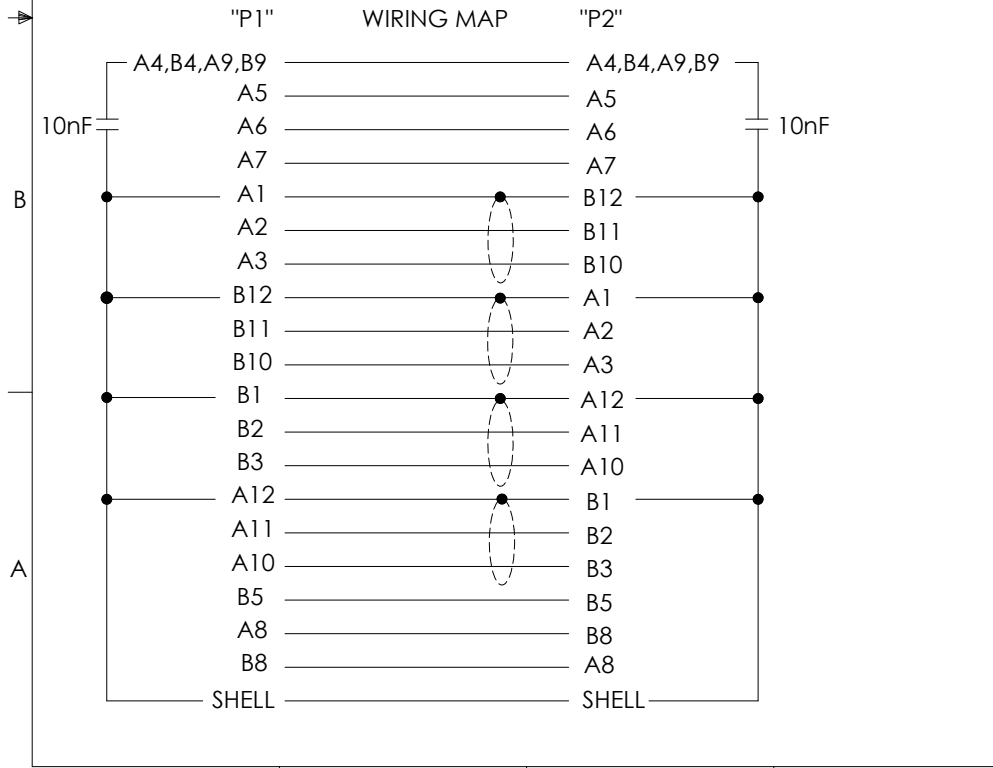


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/18/18	S.LI

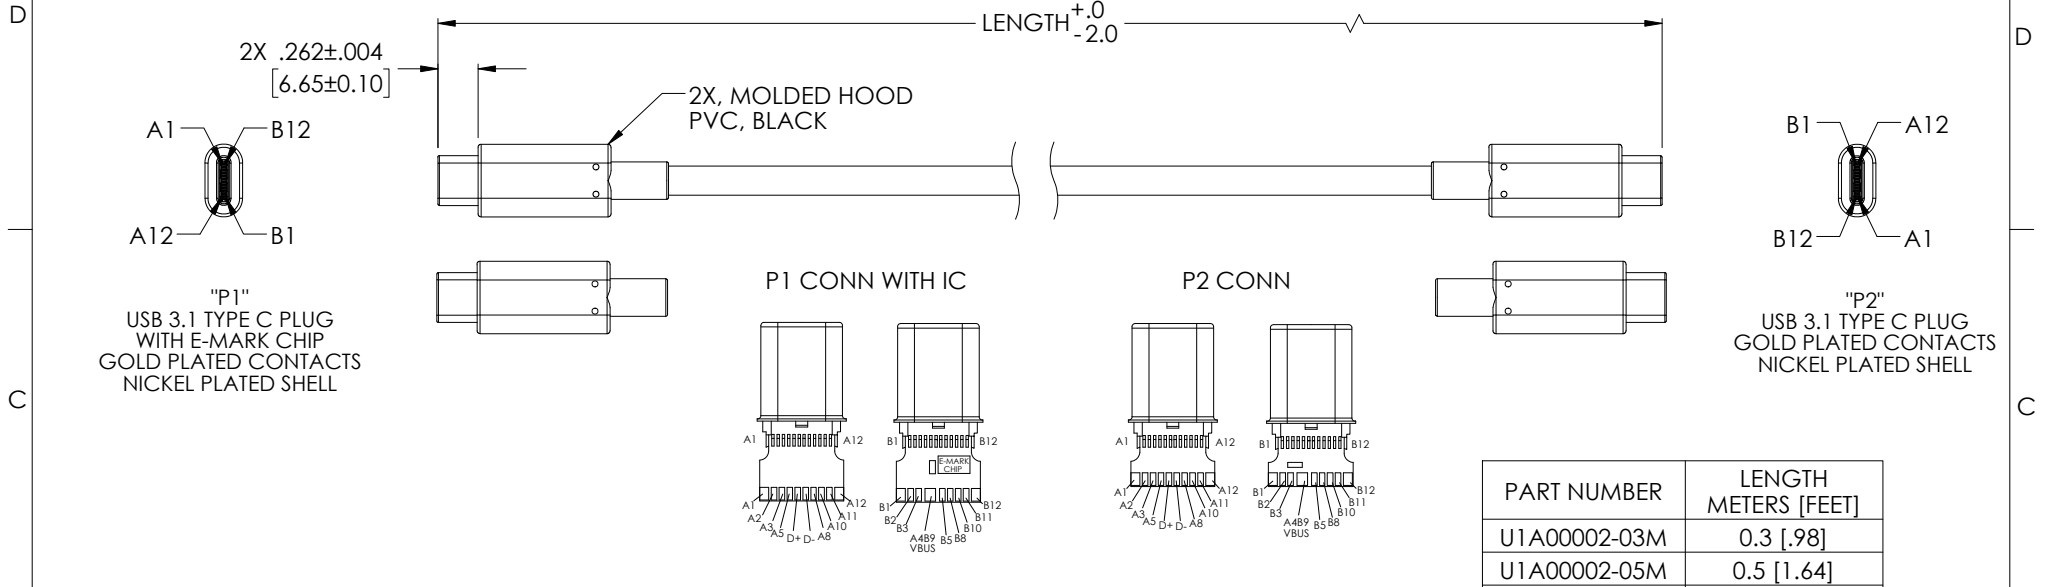

NOTES:

- CABLE: [32AWG*1P+EAM]*4C+32AWG*1P+32AWG*4C+23AWG*1C]+2EAB, OD: 4.8mm, BRAID:85%, JACKET: PVC, BLACK
- ELECTRICAL TEST:
 - 100% OPEN SHORT & MISS WIRE TEST
 - HI-POT: 100V AC/0.1S
 - INSULATION: 10M OHM MIN. AT 100V DC
 - CONDUCTOR RESISTANCE: 3 OHM MAX.

PACKAGING:

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE 2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY S.LI	DATE 05/18/18	<p>50 HIGH STREET NORTH ANDOVER, MA 01845</p>
	CHECKED BY B.ZHANG	DATE 05/18/18	
APPROVED BY B.GATES	DATE 05/18/18	PRODUCT DESCRIPTION CA, USB 3.1 TYPE C GEN2 M/M 10Gbps	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
		DWG. NO. U1A00002	REV. A
		SCALE: NONE	CAD FILE: U1A00002.SLDDRW
		SHEET 1 OF 1	