


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/22/17	J.LABOY
B	ECN 8837: UPDATE LENGTH	07/04/17	S.LI

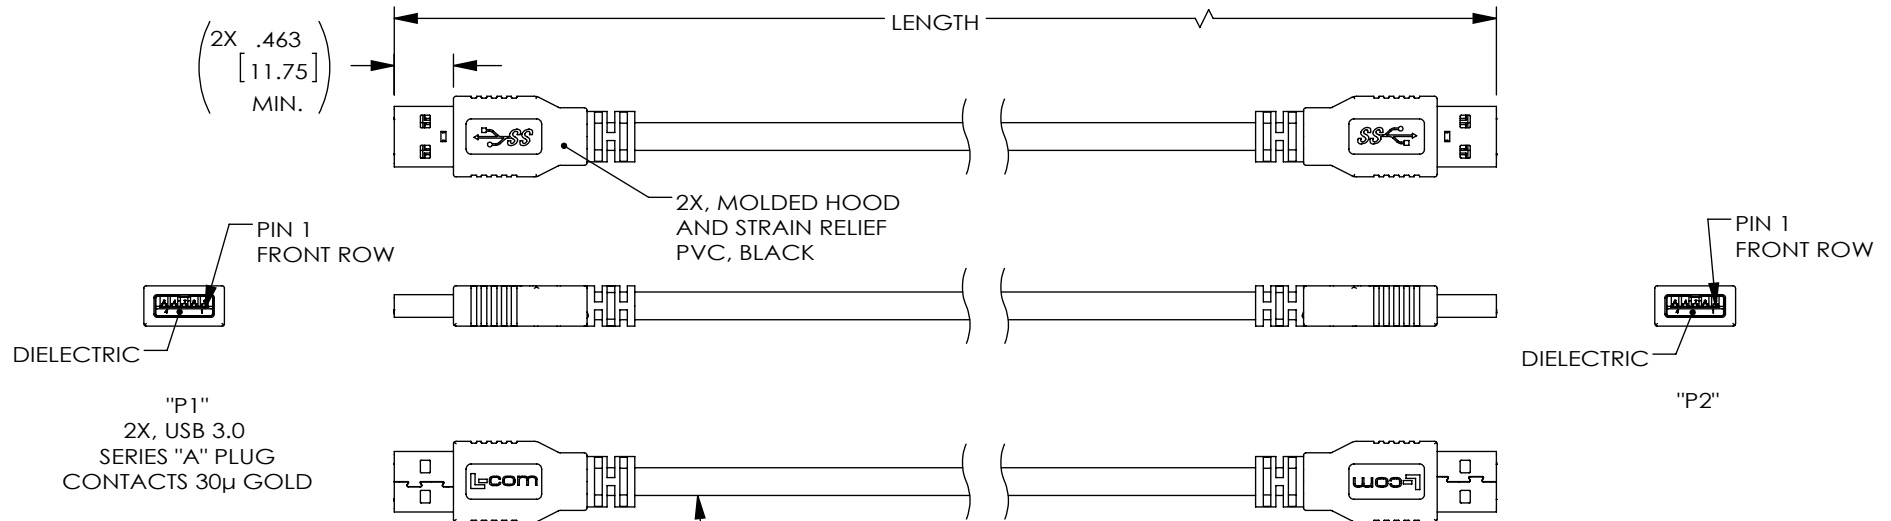

"P1"	WIRING MAP	"P2"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	8
6	YELLOW	9
7	DRAIN WIRE	7
8	PURPLE	5
9	ORANGE	6
SHELL	BRAID	SHELL

ONE 30AWG STRANDED (19X42) TINNED COPPER TWISTED PAIR
TWO 30AWG SHIELDED STRANDED (19X42) TINNED COPPER TWISTED PAIR WITH DRAIN WIRE
TWO 24AWG STRANDED (41X40) TINNED COPPER CONDUCTORS
OVERALL ALUMINUM/POLYESTER SHIELD PLUS TINNED COPPER BRAID SHIELD
JACKET: TPE, BLACK(NOM DIA. .217" [5.5])

PART NUMBER	LENGTH METERS [FEET]
U3A00007-03M	0.3 [.98]
U3A00007-05M	0.5 [1.64]
U3A00007-075M	0.75 [2.46]
U3A00007-1M	1.0 [3.28]
U3A00007-105M	1.5 [4.92]

NOTES:

- CABLE IS RATED FOR 10,000 BEND CYCLES, MINIMUM
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.27] PROJECTION 	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY S.LI	05/19/2017	
	CHECKED BY B.ZHANG	05/19/2017	
	APPROVED BY S.PAN	05/19/2017	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY USB
COLOR VARIATIONS MAY OCCUR			PRODUCT DESCRIPTION CA, USB3.0 A/A HI-FLEX
SIZE A	FSCM NO. 43321	DWG. NO. U3A00007	REV. B
SCALE: NONE		CAD FILE: U3A00007.SLDDRW	
		SHEET 1 OF 1	