


KULTD 6



Approvals

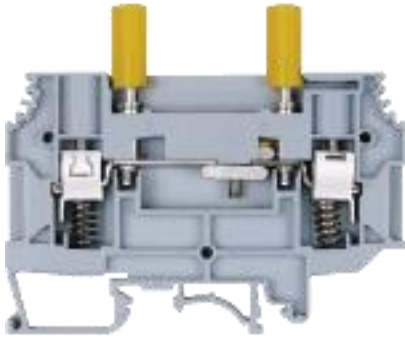

General Data

Type	KULTD 6
Wire Termination Technology	Screw Clamp
Ratings	1000 V/41 A/6 sq mm/1/0 Nm
GTIN / Harmonize Custom Code	India
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3.5

Dimensions & Weight

Height (mm)	56
Height (inches)	2.20
Width (mm)	85.50
Width (inches)	3.35
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	2.05

Material Data	
Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size	
Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	6
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	10

Ratings - IEC	
Standard	EC 60947-7-1
Rated Voltage (V)	1000
Rated Current (A)	41
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	0.72
Rated Impulse Withstand Voltage(kV)	6
Pollution Degree	III

Accessories


End Plate

KPSLD

Height : 46.40 mm

Width : 85.10 mm

Thickness : 1 mm



End Clamp

SCUDD

Height : 50 mm

Width : 55.50 mm

Thickness : 10 mm




SCUSL

Height : 41 mm

Width : 47.50 mm

Thickness : 8 mm



Comb-type Shorting Link	
SLD6 (2W, 3W, 4W, 5W, 10W)	
Marking Label	
LABEL KN8	
Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)	
CHK Height : 7.5 mm Width : 35 mm Thickness : 1 mm	
CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKS (Perforated) Height : 7.5 mm Width : 35 mm Thickness : 1 mm	

CHS Height : 15 mm Width : 32 mm Thickness : 1.50 mm	
Group Marking Holder	
GMH 10 Height : 51 mm Width : 41.50 mm Thickness : 10 mm	
GMH 20 Height : 51 mm Width : 41.50 mm Thickness : 20 mm	

Note : Technical specifications may change in line with technical advances and industry standards