

HC843E



Embedded Multi-Constellation Dual-Band and Iridium Switchable Antenna

Frequency Coverage: GPS L1, L2 | GALILEO E1 | BEIDOU B1 | GLONASS G1, G2 | Iridium + L-Band

The patented dual-purpose (GNSS and Iridium signal reception) HC843E embedded helical antenna is designed for precision positioning within the GPS/QZSS-L1/L2, GLONASS-G1/G2, Galileo-E1, and BeiDou-B1 frequency bands, including the satellite-based augmentation system (SBAS) available in the region of operation [WAAS (North America), EGNOS (Europe), MSAS (Japan), or GAGAN (India)]. The HC843E also passively supports communications over voice and data modems on the Iridium® frequency band (1616.0 - 1626.5 MHz).

The HC843E is switchable between the passive Iridium and the active GNSS antenna: an input voltage lower than 5.2 VDC engages the GNSS antenna, while an input voltage above of 5.5 and above invokes the passive Iridium antenna..

Weighing only 8 g, the light and compact HC843E features a precision-tuned helix element that provides excellent axial ratios and operates without the requirement of a ground plane, making it ideal for a variety of applications, including uncrewed aerial vehicles (UAVs).

The HC843E features an industry-leading low current, low-noise amplifier (LNA) that includes an integrated low-loss pre-filter to prevent harmonic interference from high-amplitude signals, such as 700 MHz band LTE and other nearby in-Band cellular signals.

Tallysman provides an optional embedded helical mounting ring (PN: 23-0220-0 for the HC843E), which traps the outer edge of the antenna circuit board to the host circuit board or to any flat surface. Tallysman also provides support for installation and integration of embedded helical antennas to enable the integrator to achieve a successful installation and obtain optimum antenna performance.

Mounting instructions available on our product page.



Applications

- Iridium® voice and data applications
- Autonomous uncrewed aerial vehicles (UAVs)
- Precision GNSS positioning
- Precision land survey positioning
- Mission-critical GNSS timing
- Network timing and synchronization
- Sea and land container tracking
- Fleet management and asset tracking
- Marine and avionics systems
- Law enforcement and public safety

Features

- Low noise preamp (3.3 dB typ.)
- Axial ratio (≤ 0.5 dB at zenith)
- LNA gain (25 dB typ., 23 dB min.)
- Low current (GNSS: 23 mA, Iridium: 3.6 mA typ.)
- ESD circuit protection (15 kV)
- Invariant performance from 2.5 to 16 VDC
- GNSS-mode: 2.5 to 5.0 VDC
- Iridium-mode: 5.5 to 16 VDC
- REACH, and RoHS compliant

Benefits

- Extremely light (8 g)
- Ideal for RTK and PPP surveying systems
- Excellent RH circular polarized signal reception
- Great multipath rejection
- Increased system accuracy
- Excellent signal-to-noise ratio
- Industrial temperature range

About Calian: With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.calian.com/gnss

Revision: 202309

Contact us:
info.gnss@calian.com
T: +1 613 591-3131

Embedded Multi-Constellation Dual-Band and Iridium Switchable Antenna

Frequency Coverage: GPS L1, L2 | GALILEO E1 | BEIDOU B1 | GLONASS G1, G2 | Iridium + L-Band

Antenna

Technology Dual-frequency, RHCP quadrifilar helix

		Gain dBic typ. at Zenith	Axial Ratio dB at Zenith
GNSS			
GPS / QZSS	L1	2.2	≤ 0.5
	L2	2.4	≤ 0.5
	L5	-	-
GLONASS	G1	2.6	≤ 0.5
	G2	2.1	≤ 0.5
	G3	-	-
Galileo	E1	2.2	≤ 0.5
	E5A	-	-
	E5B	-	-
	E6	-	-
BeiDou	B1	2.2	≤ 0.5
	B2b	-	-
	B2a	-	-
	B3	-	-
IRNSS / NavIC	L5	-	-
QZSS	L6	-	-
L-Band Services (1525 MHz - 1559 MHz)		-	-
Satellite Communications			
Iridium		2.5	≤ 0.5
Globalstar		-	-
Other			
Axial Ratio at 10°	-	Efficiency	-
PC Variation	± 3.0 mm (all freq.)	PCO (mm)	-

Mechanicals

Mechanical Size	38.7 mm (dia.) x 51.5 mm (h.)
Weight	8 g
Radome	-
Mount	Helical mounting ring P/N 23-0220-0
Available Connectors	MCX (female)

Environmental

Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +95 °C
Vibration	MIL-STD-810-G - Test Method 514.6
Shock	-
Salt Fog	-
IP Rating	-
Compliance	IPC-A-610, FCC, RED / CE Mark, RoHS, REACH

Warranty


Parts and Labour	1-year standard warranty
------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Frequency Bandwidth		Out of Band Rejection
Lower Band	1217 - 1255 MHz	> 35 dB @ < 1100 MHz > 30 dB @ < 1200 MHz
L-Band Corr.	-	> 36 dB @ < 1400 MHz > 40 dB @ < 1500 MHz > 38 dB @ > 1625 MHz > 45 dB @ > 1700 MHz
Upper Band	1559 - 1626.5 MHz	

Architecture	Pre-filtered
Gain	25 dB typ., 23 dB min
Noise Figure	3.3 dB typ.
VSWR	< 1.5:1 typ., 1.8:1 max.
Supply Voltage Range	GNSS: 2.5 to 5.0 VDC Iridium: 5.5 to 16 VDC
Supply Current	GNSS: 23 mA typ. Iridium: 3.6 mA typ.
ESD Circuit Protection	15 kV air discharge
P 1dB Output	11 dBm typ.
Group Delay	15 ns (L1), 12 ns (L2)

Mechanical Diagram - Units in 'mm'

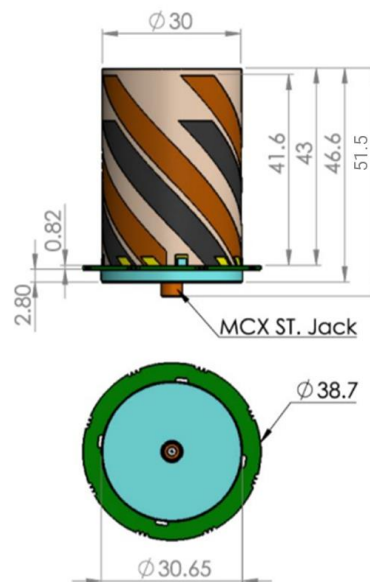

Ordering Information

Part Number 33-HC843E

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://at.calian.com/gnss/information-support/part-number-ordering-guide/>