

Type 0ALA

1000VDC, Fast Acting Fuse

0ALA Series

RoHS Compliant

Description

Fast Acting fuse for DC Application

Features

- Excellent DC performance
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Design to UL248-1 & UL248-20

Applications

DC Applications
EV/HEV/ESS Applications

Physical Specifications


Materials	Body : Ceramic
	Terminals : Tin Plated Copper
Marking	On Fuse :
	"bel", "0ALA",
	"Current Rating", "Voltage Rating", "Interrupting Rating"
	On Label :
	"bel", "0ALAX", "Current Rating", "Voltage Rating", "Interrupting Rating", and "  , "  "(China RoHS compliant).

Ratings


Ampere Rating / Voltage Rating	Ampere Range / Volt @ I.R. ability*
150A-250A / 1000V DC	150A-250A / 1000V @ 50kA DC
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)	

Temperature Re-Rating Curve

Operating Temperature: -40°C to +100°C, with proper rerating factor applied

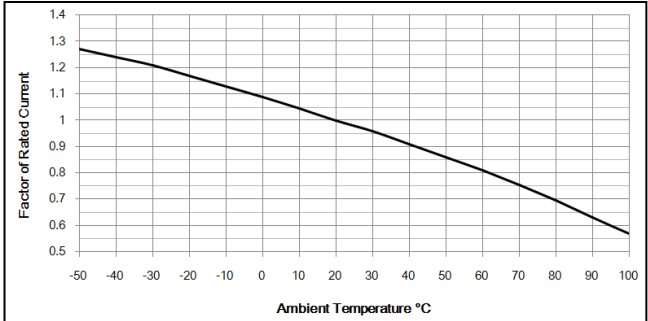

Average Time Current Curve

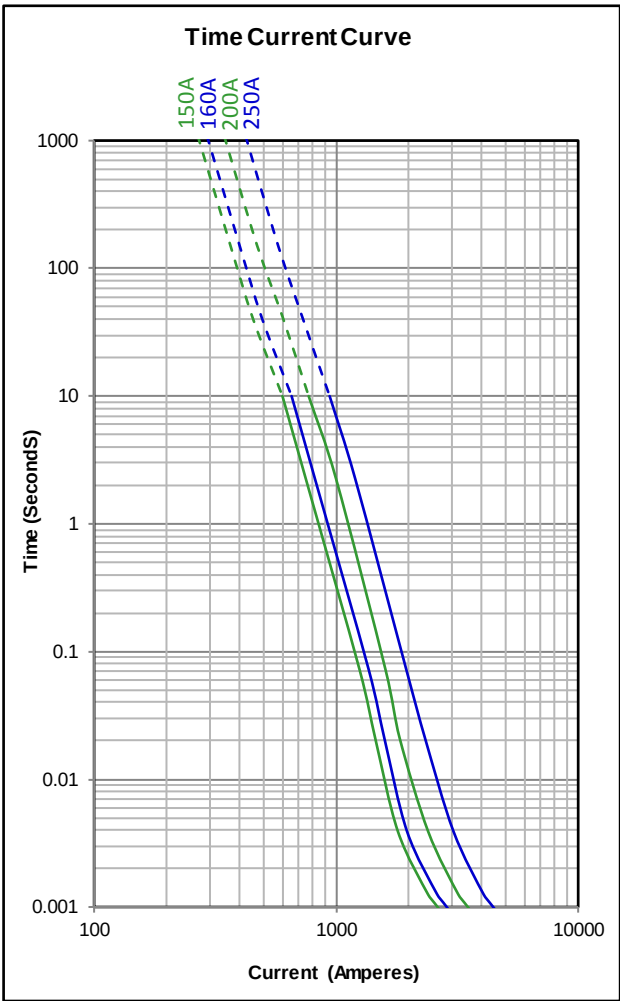

Electrical Specifications

Part Number	Ampere Rating	Voltage and Interrupting Ratings	0.5In Power Loss (W)
0ALAxK150-xx	150A	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	4.5
0ALAxK160-xx	160A		5.2
0ALAxK200-xx	200A		6.6
0ALAxK250-xx	250A		8.5

Consult manufacturer for other ratings

Type 0ALA

3 / 3


Fuse FGNO Explanation

0ALA X [XXXX] -XX

0ALAB=0ALAB; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Amps	Bel FGNO[XXXX]
150	K150
160	K160
200	K200
250	K250

Mechanical Dimensions

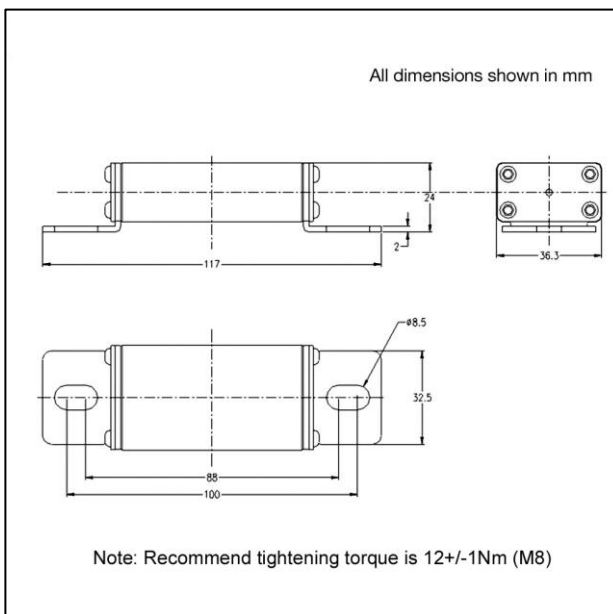

Ordering Information

0ALA X XXXX - X X

FUSE TYPE 0ALA

MOUNTING TAB STYLE B = For Stud Mount, Bottom blade

AMPERE RATING Refer to fuse FGNO explanation table

PACKAGING CODE B = Bulk

QUANTITY CODE A = 4pcs/inner box, 72pcs/shipping carton

Packaging

Packaging Option	Quantity	Packaging Code
Bulk	4pcs/inner box, 72pcs/shipping carton	BA